



ITC

Make Life Easier

Shenzhen ITC Technology Co.,Ltd


Shenzhen ITC Technology Co.,Ltd

Email:info@itc-a.com

Call:86-755-2335-4846

Web:www.itc-a.com

Add:No.223,Shajing Road,Shajing Street,Bao'an District,Shenzhen,China

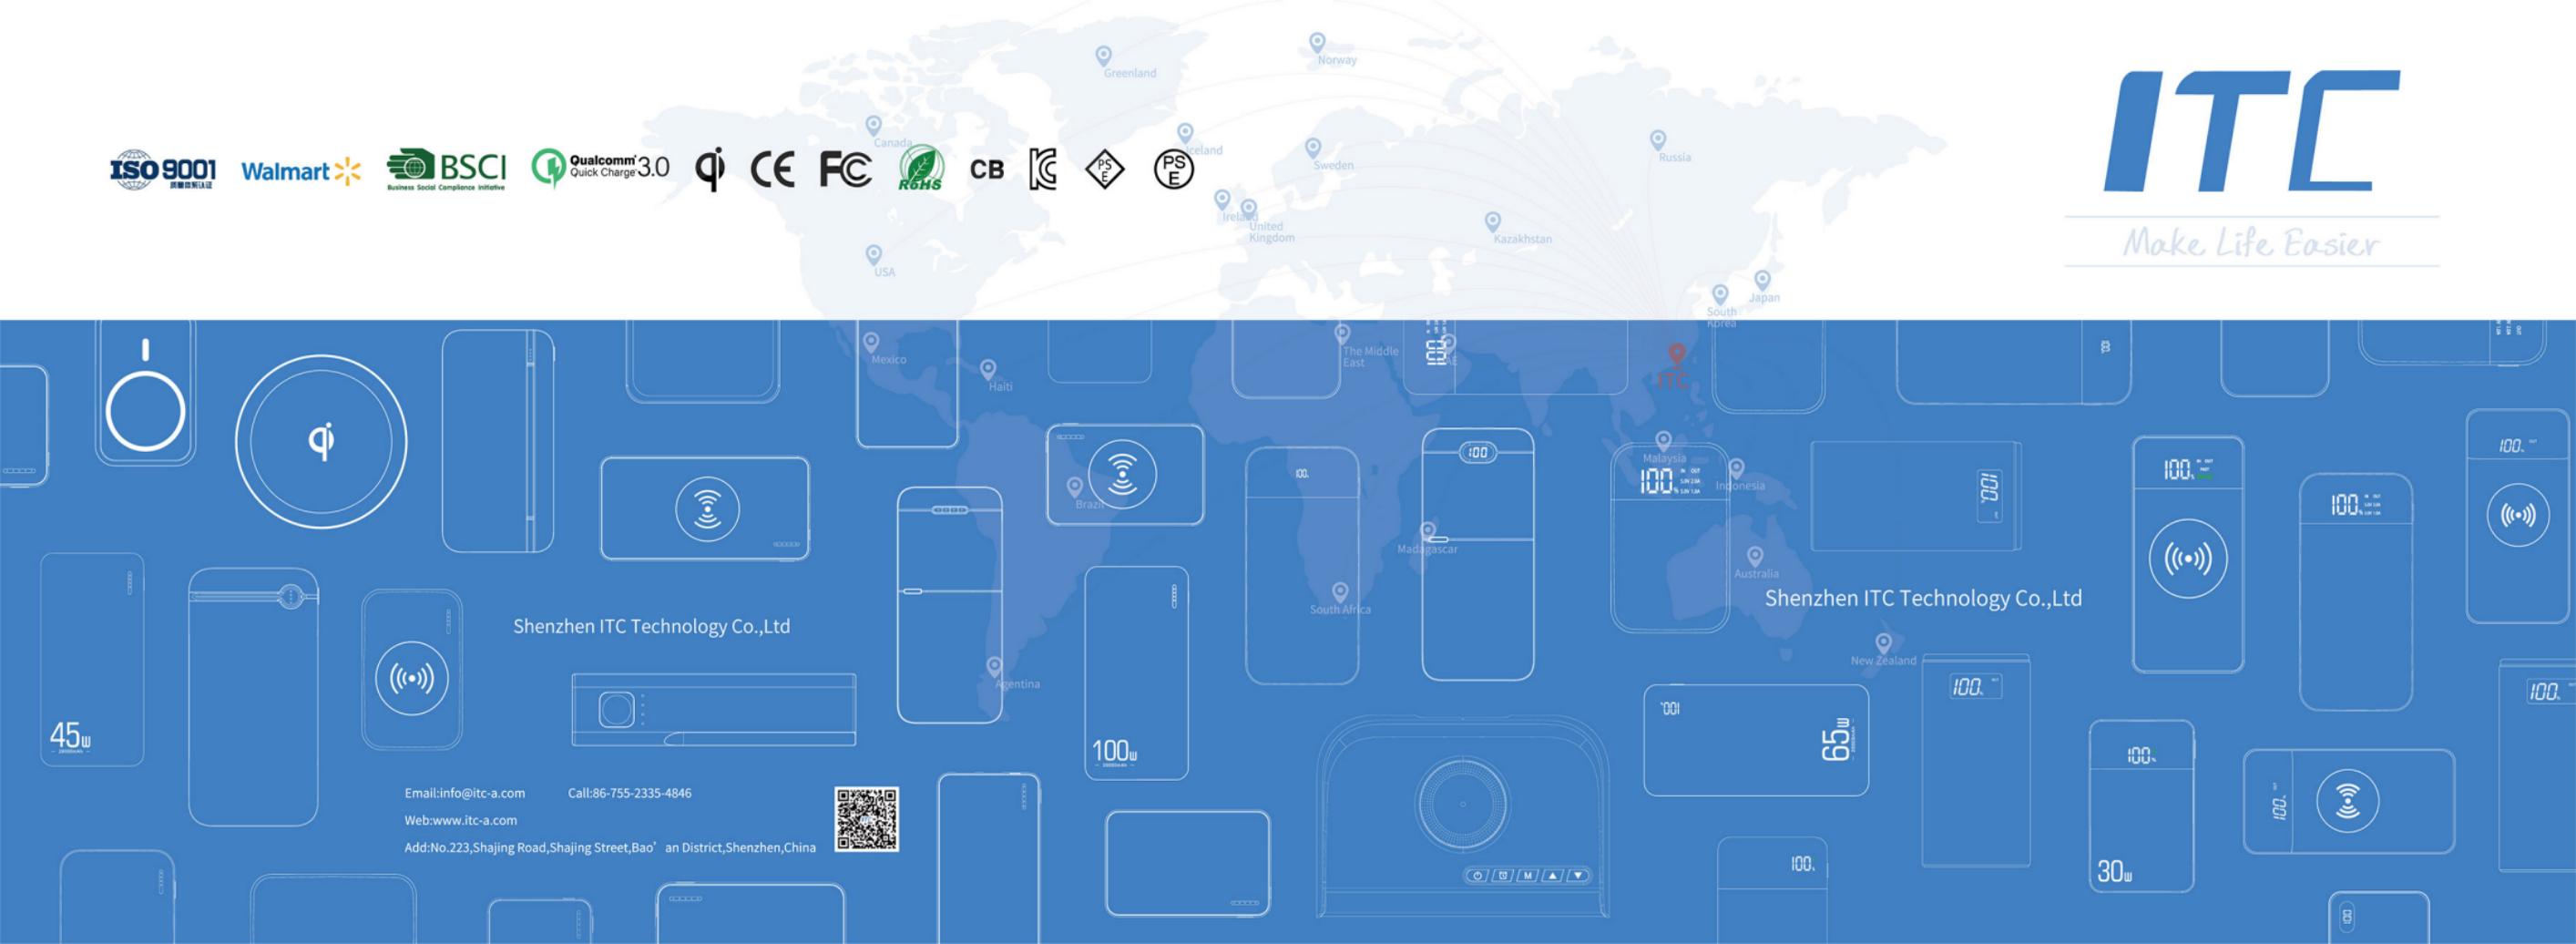



ABOUT COMPANY

Shenzhen ITC Technology Co., Ltd. was established in 2007 and is located in Shenzhen, China. It is a high-tech enterprise that integrates research and development, production, and sales. The company's main products include power banks, wireless chargers, car chargers, car-mounted wireless chargers, Bluetooth speakers, and other computer and mobile phone peripheral accessories. In the future, the company plans to expand its product range to include fast charging, outdoor energy storage, and new energy products. Our development goal is to become an expert in the new generation of mobile power banks.

With 16 years of experience in R&D, production, and export, we have become one of the most professional and competitive manufacturers. Our customers come from all over the world, including the US, Europe, Middle East, Southeast Asia etc. They include companies in promotion, agency, branding, supermarkets, and chain stores such as Walmart, Timberland, Nautica, Kooba, Steve Madden, Mont Blanc, JMC, Costco, and Greenhouse etc.

ITC has a 2,000 square meter SMT workshop with two advanced Japanese SMT machines, a 5,000 square meter injection and assembly workshop with over 200 workers, 12 sets of mold machines, 7 sets of injection machines, and 8 assembly production lines that ensure a daily capacity of approximately 50,000 units. Additionally, 10 sets of full-auto aging equipment can perform aging tests of 5,000 finished products simultaneously.

Our strong R&D team of around 15 employees covers senior design engineers, senior hardware and software engineers, testing engineers, and other technical members who enhance our technology strength. Our R&D team never stops innovating and creating. We develop more than 200 models and 5-6 new private molds each month.

ITC has passed audits by ISO9001, BSCI, and AF, and all products produced by ITC are in line with international certifications such as CE, FCC, RoHS, PSE, UL, CNS, KC, CB, and Qi. All incoming materials undergo rigorous inspection before production and assembling, while finished products undergo professional aging tests. With rich experience in this field, we are dedicated to providing high-quality products and excellent design solutions to all our customers.

"Growing together with our customers" is our operating philosophy. We always prioritize the benefits of our customers and strive to achieve development and profitability through quality optimization. We firmly believe that the quality we provide today lays the foundation for tomorrow's success in the market.

CONTENTS

| | | | |
|-----------------------------------|-------------|-------|---------------------------------|
| POWER BANK | 01-06 | 27-28 | POWER BANK WITH LCD |
| POWER BANK WITH LED BACKLIGHT | 07-08 | 37 | FRUIT POWER BANK |
| POWER BANK WITH WIRELESS | 09-12&31-32 | 38 | POWER BANK WITH LEATHER TEXTURE |
| POWER BANK WITH MAGNETIC WIRELESS | 14&33-36 | 39-40 | HAND WARMER POWER BANK |
| PD30W-100W POWER BANK | 15-18 | 41-42 | WIRELESS CHARGING PAD |
| POWER BANK WITH BUILT IN CABLE | 19-22&29-30 | 43-46 | PD30W-100W CAR CHARGER |
| POWER BANK WITH USB-C&USB-A | 23-24 | 51-52 | MULTI-FUNCTIONAL CHARGER |
| ALLUMINUM ALLOY POWER BANK | 25-26 | 53-54 | SOLAR POWER BANK |



ITC-D01
5000mAh

Specs: 2A
Size: 100*63.8*15.8mm



ITC-D02
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 100*63.8*26.8mm



ITC-D03
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*17.5mm



ITC-D04
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*28mm



ITC-D05
30000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*40mm



ITC-P01
5000mAh

Specs: 2A
Size: 100*63.8*15.8mm



ITC-P02
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 100*63.8*26.8mm



ITC-P03
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*17.5mm



ITC-P04
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*28mm



ITC-P05
30000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*40mm

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A



| | | | | | | | | | | | |
|---|--|--|--|---|---|--|--|--|--|---|---|
| <p>ITC-S1 5000mAh</p> <p>Specs: 2A Size: 100*63.3*13.5mm</p> | <p>ITC-S2 10000mAh</p> <p>Specs: 2A/PD20W/PD22.5W Size: 100*63.3*23mm</p> | <p>ITC-S3 10000mAh</p> <p>Specs: 2A/PD20W/PD22.5W Size: 152*73.3*14.5mm</p> | <p>ITC-S4 20000mAh</p> <p>Specs: 2A/PD20W/PD22.5W Size: 152*73.3*23.8mm</p> | <p>ITC-S5 10000mAh</p> <p>Specs: 2A/PD20W/PD22.5W Size: 140*68.44*15.7mm</p> | <p>ITC-S6 20000mAh</p> <p>Specs: 2A/PD20W/PD22.5W Size: 140*68.44*27.7mm</p> | <p>ITC-T1 5000mAh</p> <p>Specs: 2A Size: 100*63.3*13.5 mm</p> | <p>ITC-T2 10000mAh</p> <p>Specs: 2A/PD20W/PD22.5W Size: 100*63.3*23mm</p> | <p>ITC-T3 10000mAh</p> <p>Specs: 2A/PD20W/PD22.5W Size: 152*73.3*14.5mm</p> | <p>ITC-T4 20000mAh</p> <p>Specs: 2A/PD20W/PD22.5W Size: 152*73.3*23.8mm</p> | <p>ITC-T5 10000mAh</p> <p>Specs: 2A/PD20W/PD22.5W Size: 140*68.44*15.7mm</p> | <p>ITC-T6 20000mAh</p> <p>Specs: 2A/PD20W/PD22.5W Size: 140*68.44*27.7mm</p> |
|---|--|--|--|---|---|--|--|--|--|---|---|

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A



| | | | | | | | | | | | | | |
|--|---|--|--|--|--|--|--|--|--|--|--|--|--|
| ITC-E01 500mAh Specs: 2A Size: 100*63.8*15.8mm | ITC-E02 1000mAh Specs: 2A/PD20W/PD22.5W Size: 100*63.8*26.8mm | ITC-E03 10000mAh Specs: 2A/PD20W/PD22.5W Size: 149.4*67.4*16.3mm | ITC-E04 20000mAh Specs: 2A/PD20W/PD22.5W Size: 150*68*28mm | ITC-E05 30000mAh Specs: 2A/PD20W/PD22.5W Size: 150*68*40mm | ITC-E06 40000mAh Specs: 2A/PD20W/PD22.5W Size: 150*68.1*52.6mm | ITC-E07 50000mAh Specs: 2A/PD20W/PD22.5W Size: 150*68.1*64.6mm | ITC-F01 500mAh Specs: 2A Size: 100*63.8*15.8mm | ITC-F02 10000mAh Specs: 2A/PD20W/PD22.5W Size: 100*63.8*26.8mm | ITC-F03 10000mAh Specs: 2A/PD20W/PD22.5W Size: 149.4*67.4*16.3mm | ITC-F04 20000mAh Specs: 2A/PD20W/PD22.5W Size: 150*68*28mm | ITC-F05 30000mAh Specs: 2A/PD20W/PD22.5W Size: 150*68*40mm | ITC-F06 40000mAh Specs: 2A/PD20W/PD22.5W Size: 150*68.1*52.6mm | ITC-F07 50000mAh Specs: 2A/PD20W/PD22.5W Size: 150*68.1*64.6mm |
|--|---|--|--|--|--|--|--|--|--|--|--|--|--|

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

If Built-in cable output:
Output: Built-in cable C, 5V/2A
Output: Built-in cable L, 5V/2A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

If Built-in cable output option 1:
Output: Built-in cable C, Data cable support 5V/2A 9V/2A 12V/1.5A (18W)
Output: Built-in cable L, Data cable support 5V/2A 9V/2.22A 12V/1.5A (20W)
If Built-in cable output option 2:
Output: Built-in cable C, Data cable support 5V/2A 9V/2A 12V/1.5A (18W)
Output: Built-in cable L, 5V/2A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

If Built-in cable output:
Output: Built-in cable C, 5V/2A
Output: Built-in cable L, 5V/2A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

If Built-in cable output option 1:
Output: Built-in cable C, Data cable support 5V/2A 9V/2A 12V/1.5A (18W)
Output: Built-in cable L, Data cable support 5V/2A 9V/2.22A 12V/1.5A (20W)
If Built-in cable output option 2:
Output: Built-in cable C, Data cable support 5V/2A 9V/2A 12V/1.5A (18W)
Output: Built-in cable L, 5V/2A



ITC-P01
5000mAh

Specs: 2A/PD20W/PD22.5W+Backlight
Size: 100*63.8*15.8mm



ITC-P02
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight
Size: 100*63.8*26.8mm



ITC-P03
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight
Size: 140*68.8*17.5mm



ITC-T3
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight
Size: 152*73.3*14.5mm



ITC-D01
5000mAh

Specs: 2A/PD20W/PD22.5W+Backlight
Size: 100*63.8*15.8mm



ITC-D02
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight
Size: 100*63.8*26.8mm



ITC-D03
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight
Size: 140*68.8*17.5mm



ITC-S3
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight
Size: 152*73.3*14.5mm

Specifications

2A+Backlight

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Backlight: LOGO

Specifications

2A+Backlight

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Backlight: LOGO

Specifications

PD20W+Backlight

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A
Backlight: LOGO

Specifications

PD22.5W+Backlight

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Backlight: LOGO

Specifications

2A+Backlight

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Backlight: LOGO

Specifications

2A+Backlight

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Backlight: LOGO

Specifications

PD20W+Backlight

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A
Backlight: LOGO

Specifications

PD22.5W+Backlight

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Backlight: LOGO



ITC-S1-W
5000mAh

Specs: 2A+5W/20W+15W
Size: 100*63.3*13.5mm



ITC-S3-W
10000mAh

Specs: 2A+5W/22.5W+15W
Size: 152*73.3*14.5mm



ITC-S4-W
2000mAh

Specs: 2A+5W/22.5W+15W
Size: 152*73.3*23.8mm



ITC-T3-W
10000mAh

Specs: 2A+5W/22.5W+15W
Size: 152*73.3*14.5mm



ITC-T4-W
2000mAh

Specs: 2A+5W/22.5W+15W
Size: 152*73.3*23.8mm



ITC-T7-W
10000mAh

Specs: 2A+5W/22.5W+15W
Size: 152*73.3*14.5mm



ITC-T8-W
2000mAh

Specs: 2A+5W/22.5W+15W
Size: 152*73.3*23.8mm



ITC-C02-W
10000mAh

Specs: 2A+5W/22.5W+15W
Size: 150*72*15mm

Specifications

2A+5W

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Output: Wireless 5W

Specifications

2A+5W

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Output: Wireless 5W

Specifications

PD20W+15W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A
Output: Wireless 15W/10W/7.5W/5W

Specifications

PD22.5W+15W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: Wireless 15W/10W/7.5W/5W

Specifications

2A+5W

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Output: Wireless 5W

Specifications

2A+5W

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Output: Wireless 5W

Specifications

PD20W+15W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A
Output: Wireless 15W/10W/7.5W/5W

Specifications

PD22.5W+15W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: Wireless 15W/10W/7.5W/5W



ITC-D01-W
5000mAh

Specs: 2A+5W/20W+15W
Size: 100*63.8*15.8mm



ITC-D02-W
10000mAh

Specs: 2A+5W/20W+15W
Size: 100*63.8*26.8mm



ITC-D03-W
10000mAh

Specs: 2A+5W/22.5W+15W
Size: 140*68.8*17.5mm



ITC-D04-W
20000mAh

Specs: 2A+5W/22.5W+15W
Size: 140*68.8*28mm



ITC-P01-W
5000mAh

Specs: 2A+5W/20W+15W
Size: 100*63.8*15.8mm



ITC-P02-W
10000mAh

Specs: 2A+5W/20W+15W
Size: 100*63.8*26.8mm



ITC-P03-W
10000mAh

Specs: 2A+5W/22.5W+15W
Size: 140*68.8*17.5mm



ITC-P04-W
20000mAh

Specs: 2A+5W/22.5W+15W
Size: 140*68.8*28mm

Specifications

2A+5W

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Output: Wireless 5W

Specifications

2A+5W

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Output: Wireless 5W

Specifications

PD20W+15W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A
Output: Wireless 15W/10W/7.5W/5W

Specifications

PD22.5W+15W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: Wireless 15W/10W/7.5W/5W

Specifications

2A+5W

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Output: Wireless 5W

Specifications

2A+5W

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Output: Wireless 5W

Specifications

PD20W+15W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A
Output: Wireless 15W/10W/7.5W/5W

Specifications

PD22.5W+15W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: Wireless 15W/10W/7.5W/5W

Snap and Charge for iPhone 15



Stronger Magnetic
Connection



ITC-S1-M
5000mAh(955465*1)

Specs: 2A+5W/PD20W+15W(Magnetic)
Size: 100*63.3*14.82mm



ITC-S2-M
10000mAh(955465*2)

Specs: 2A+5W/PD20W+15W(Magnetic)
Size: 100*63.3*24.82mm



ITC-S8-M
5000mAh(706074*1)

Specs: 2A+5W/PD20W+15W(Magnetic)
Size: 105.2*67.8*13.9mm



ITC-S9-M
10000mAh(1376074*1)

Specs: 2A+5W/PD20W+15W(Magnetic)
Size: 105.2*67.8*20mm

Specifications

2A+5W

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Output: Magnetic Wireless 5W

Specifications

PD20W+15W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1&2, 5V/3A 9V/2A 12V/1.5A
Output: Magnetic Wireless 15W/10W/7.5W/5W

Specifications

2A+5W

Input: TYPE-C 5V/2A
Output: USB 5V/2A
Output: Magnetic Wireless 5W

Specifications

PD20W+15W

Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A
Output: Magnetic Wireless 15W/10W/7.5W/5W



ITC-C01

9600mAh/10000mAh(18650*3)

Specs: PD30W
Size: 100*62.5*22.5mm



ITC-C01

9600mAh/10000mAh(18650*3)

Specs: PD45W
Size: 100*62.5*22.5mm



ITC-T6&ITC-P4

20000mAh(6060100*4)

Specs: PD65W
Size: 140*68*27.7mm



ITC-P5

30000mAh(6060100*6)

Specs: PD100W
Size: 140*68*39.7mm

Specifications

PD30W

Material: ABS
Input: TYPE-C 5V/3.0A 9V/2.0A 12V/1.67A 15V/2A 20V/1.5A(30W max)
Output: TYPE-C 5V/3.0A 9V/3A 12V/2.5A 15V/2A 20V/1.5A(30W max)
PPS: 3.3V-11V/3A
Output: USB 5V/3A 9V/2A 12V/1.67A(20W max)
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD45W

Material: ABS
Input: TYPE-C 5V/3.0A 9V/2.0A 12V/1.67A 15V/2A 20V/1.5A(30W max)
Output: TYPE-C 5V/3.0A 9V/3A 12V/3A 15V/3A 20V/2.25A(45W max)
PPS: 3.3V-11V/3A, 3.3V-16V/3A
Output: USB 5V/3A 9V/2A 12V/1.67A(20W max)
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD65W

Material: ABS+rubber oil
Input: Micro 5V/2A 9V/2A 12V/1.5A(18W)
Input: Type-C 5V/3A 9V/3A 12/3A 15V/3A 20V/3A(60W)
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W max)
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(22.5W)
IC solution: with OCP,OVP,ODP,SCP,OTP
Advantage: 30W discharge the device working temperature $\leq 45^{\circ}\text{C}$, 2h full charged by 60W power.

Specifications

PD100W

Material: ABS+rubber oil
Input: Type-C1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W)
Output: Type-C1 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A(100W max) PPS 3.3V-21V/3A
Output: Type-C2 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A(100W max) PPS 3.3V-21V/3A
Output: USB 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(22.5W)
IC solution: with OCP,OVP,ODP,SCP,OTP
Advantage: 30W discharge the device working temperature $\leq 45^{\circ}\text{C}$, 2h full charged by 60W power.



ITC-T6&ITC-P4

20000mAh(6060100*4)

Specs: PD45W
Size: 140*68*27.7mm



ITC-S6&ITC-D4

20000mAh(6060100*4)

Specs: PD45W
Size: 140*68*27.7mm



ITC-S6&ITC-D4

20000mAh(6060100*4)

Specs: PD65W
Size: 140*68*27.7mm



ITC-D5

30000mAh(6060100*6)

Specs: PD100W
Size: 140*68*39.7mm

Specifications

PD45W

Material: ABS+rubber oil
Input: Micro 5V/2A 9V/2A (18W max)
Input: Type-C 5V/3.0A 9V/2.0A 12V/1.5A 15V/2.66A 20V/2A(40W max)
Output: Type-C 5V/3.0A 9V/3A 12V/3A 15V/3 20V/2.25A(45W max)
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W max)
IC solution: with OCP,OVP,ODP,SCP,OTP

Advantage: 30W discharge the device working temperature $\leq 45^{\circ}\text{C}$, 3h full charged by 40W power.

Specifications

PD45W

Material: ABS+rubber oil
Input: Micro 5V/2A 9V/2A (18W max)
Input: Type-C 5V/3.0A 9V/2.0A 12V/1.5 15V/2.66A 20V/2A(40W max)
Output: Type-C 5V/3.0A 9V/3A 12V/3A 15V/3A 20V/2.25A(45W max)
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W max)
IC solution: with OCP,OVP,ODP,SCP,OTP

Advantage: 30W discharge the device working temperature $\leq 45^{\circ}\text{C}$, 3h full charged by 40W power.

Specifications

PD65W

Material: ABS+rubber oil
Input: Micro 5V/2A 9V/2A 12V/1.5A(18W)
Input: Type-C 5V 3A 9V 3A 12V 3A 15V 3A 20V 3A(60W)
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W max)
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(22.5W)
IC solution: with OCP,OVP,ODP,SCP,OTP

Advantage: 30W discharge the device working temperature $\leq 45^{\circ}\text{C}$, 2h full charged by 60W power.

Specifications

PD100W

Material: ABS+rubber oil
Input: Type-C1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W)
Output: Type-C1 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A(100W max)PPS 3.3V-21V/3A
Output: Type-C2 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A(100W max)PPS 3.3V-21V/3A
Output: USB 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(22.5W)
IC solution: with OCP,OVP,ODP,SCP,OTP

Advantage: 30W discharge the device working temperature $\leq 45^{\circ}\text{C}$, 2h full charged by 60W power.



ITC-U01

4800mAh(21700*1)

Specs: 2A/PD22.5W
Size: 82.8*41*25mm



ITC-U02

9600mAh(21700*2)

Specs: 2A/PD22.5W
Size: 82.8*61.8*25mm



ITC-G05

4800mAh(21700*1)

Specs: 2A
Size: 105*27*30mm



ITC-G03

4800mAh(21700*1)

Specs: 2A
Size: 127.9*30mm



ITC-C48

10000mAh(954292*1)

Specs: PD22.5W
Size: 133*50*22mm



ITC-G02

9600mAh(21700*2)

Specs: PD30W
Size: 116*51*24mm

Specifications

2A

Input: Type-C 5V/2A
Output: USB 5V/2A

Specifications

2A

Input: Type-C 5V/2A
Output: Type-C 5V/2A
Output: USB 5V/2A

Specifications

PD22.5W

Input: Type-C 5V/2.4A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A

Material: ABS+Torch
Input: TYPE-C 5V/2A
Output: USB-A 5V/2A
Output: Built-in Type-C 20cm cable 2A

Specifications

2A

Material: Aluminum alloy+Torch
Input: Type-C 5V/2A
Output: USB-A 5V/2A

Specifications

PD22.5W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

PD30W

Input: Type-C 1.5V/3A 9V/2A 12V/1.67A 15V/2A 20V/1.5A (30W)
Input: Type-C2 5V/3A 9V/2A 12V/1.67A 15V/2A 20V/1.5A (30W)
Output: Type-C2 5V/3A 9V/3A 9V/2.22A 12V/2.5A 15V/2A 20V/1.5A (30W)
PPS: 3.3-11V/3A, 3-16V/2A (32W)
Output: USB A 5V/3A 9V/2A 12V/1.5A (18W)
Output: Total USB A +USB C share 3A



ITC-CP01
4800mAh(21700*1)

Specs: 2A
Size: 79*46*27mm



ITC-CP02
4800mAh(21700*1)

Specs: 2A
Size: 79*46*27mm



ITC-CP03
4800mAh(21700*1)

Specs: 2A
Size: 79*46*27mm



ITC-CP04
4800mAh(21700*1)

Specs: 2A
Size: 80*46*27mm



ITC-T2109
19200mAh(21700*4)

Specs: 2A/PD22.5W
Size: 98.1*51.7*51.7mm



ITC-T22121
19200mAh(21700*4)

Specs: 2A/PD22.5W
Size: 102.4*53.2*51mm



ITC-T2107
10000mAh(1260110*1)

Specs: 2A/PD22.5W
Size: 143.3*71*18.7mm



ITC-T2323
9600mAh(21700*2)

Specs: 2A/PD22.5W
Size: 166.4*53.2*30.7mm

Specifications

2A

Input: Type-C port 5V/2A
Output: Built-In Lightning or USB C Connector 5V/2A
Output: built-in Lightning or USB C cable 5V/2A

Specifications

2A

Input: Type-C port 5V/2A
Output: Built-In Lightning or USB C Connector 5V/2A
Output: built-in Lightning or USB C cable 5V/2A

Specifications

2A

Input: Type-C port 5V/2A
Output: Built-In Lightning or USB C Connector 5V/2A
Output: built-in Lightning or USB C cable 5V/2A

Specifications

2A

Input: Type-C port 5V/2A
Output: Built-In Lightning or USB C Connector 5V/2A
Output: built-in Lightning or USB C cable 5V/2A

Specifications

2A

Input: Type-C 5V/2A
Output: USB 1&2, 5V/2A

PD22.5W

Input: Type-C 5V/2.4A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 1&2, 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A

Input: Type-C 5V/2A
Output: USB 5V/2A

PD22.5W

Input: Type-C 5V/2.4A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A

Input: Type-C 5V/2A
Output: USB 5V/2A
Output: Built-in Type-C 5V/2A

PD22.5W

Input: Type-C 5V/2.4A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: Built-in Type-C support PD charging

Specifications

2A

Input: Type-C 5V/2A
Output: USB 5V/2A
Output: Built-in Type-C 5V/2A

PD22.5W

Input: Type-C 5V/2.4A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: Built-in Type-C support PD charging



ITC-T2310

10000mAh(1260110*1)

Specs: 2A/PD22.5W
Size: 142.6*68*15.4mm

ITC-T2311

20000mAh(1260110*2)

Specs: 2A/PD22.5W
Size: 143*69.4*27.9mm

ITC-T2308-3

10000mAh(1260110*1)

Specs: 2A/PD22.5W
Size: 141.6*68.4*15.4mm

ITC-T2309-3

20000mAh(1260110*2)

Specs: 2A/PD22.5W
Size: 143*69.4*27.9mm

ITC-T2308-2

10000mAh(1260110*1)

Specs: 2A/PD22.5W
Size: 141.6*68.4*15.4mm

ITC-T2309-2

20000mAh(1260110*2)

Specs: 2A/PD22.5W
Size: 143*69.4*27.9mm

ITC-T2308

10000mAh(1260110*1)

Specs: 2A/PD22.5W
Size: 141.6*68.4*15.4mm

ITC-T2309

20000mAh(1260110*2)

Specs: 2A/PD22.5W
Size: 145.5*69.4*27.6mm

ITC-T2303-2

10000mAh(1260110*1)

Specs: 2A/PD22.5W
Size: 138.3*69.3*16.3mm

ITC-T2304-2

20000mAh(1260110*2)

Specs: 2A/PD22.5W
Size: 139*69.2*28.4mm

ITC-T2307-2

30000mAh(1260110*3)

Specs: 2A/PD22.5W
Size: 141.8*70.5*40.8mm

Specifications

2A

Input: Type-C 5V/2A
Output: USB1&2, 5V/2A

PD22.5W

Input: Type-C 5V/2.4A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1&2, 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A

Input: Type-C 5V/2A
Output: USB 5V/2A

PD22.5W

Input: Type-C 5V/2.4A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A

Input: Type-C 5V/2A
Output: USB 5V/2A

Specifications

2A

Input: Type-C 5V/2.4A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A



ITC-T2301
10000mAh

Specs: 2A/PD22.5W
Size: 121.2*66*14.6mm



ITC-T2302
20000mAh

Specs: 2A/PD22.5W
Size: 133.7*65*27mm



ITC-T2312
30000mAh

Specs: 2A/PD22.5W
Size: 136.8*65*39mm



ITC-C13
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 105*60*22mm



ITC-C15
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 141*72*22mm



ITC-C18A
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 156*80*22mm



ITC-C18B
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 156*80*22mm

Specifications

2A

Input: Type-C 5V/2A
Output: USB 5V/2A

Specifications

PD22.5W

Input: Type-C 5V/2.4A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

POWER BANK WITH LCD



ITC-B06
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 149.4*67.4*16.3mm



ITC-B06-2
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 150*68*28mm



ITC-B06-3
30000mAh

Specs: 2A/PD20W/PD22.5W
Size: 150*68*40mm



ITC-B06-4
40000mAh

Specs: 2A/PD20W/PD22.5W
Size: 150*68.1*52.6mm



ITC-B06-5
50000mAh

Specs: 2A/PD20W/PD22.5W
Size: 150*68.1*64.6mm



ITC-B16
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 149.4*67.4*16.3mm



ITC-B16-2
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 150*68*28mm



ITC-B16-3
30000mAh

Specs: 2A/PD20W/PD22.5W
Size: 150*68*40mm



ITC-B16-4
40000mAh

Specs: 2A/PD20W/PD22.5W
Size: 150*68.1*52.6mm



ITC-B16-5
50000mAh

Specs: 2A/PD20W/PD22.5W
Size: 150*68.1*64.6mm

POWER BANK WITH LCD

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

If Built-in cable output:
Output: Built-in cable C, 5V/2A
Output: Built-in cable L, 5V/2A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

If Built-in cable output option 1:
Output: Built-in cable C, Data cable support 5V/2A 9V/2A 12V/1.5A (18W)
Output: Built-in cable L, Data cable support 5V/2A 9V/2.22A 12V/1.5A (20W)
If Built-in cable output option 2:
Output: Built-in cable C, Data cable support 5V/2A 9V/2A 12V/1.5A (18W)
Output: Built-in cable L, 5V/2A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

If Built-in cable output:
Output: Built-in cable C, 5V/2A
Output: Built-in cable L, 5V/2A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A


Specifications

PD22.5W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

If Built-in cable output option 1:
Output: Built-in cable C, Data cable support 5V/2A 9V/2A 12V/1.5A (18W)
Output: Built-in cable L, Data cable support 5V/2A 9V/2.22A 12V/1.5A (20W)
If Built-in cable output option 2:
Output: Built-in cable C, Data cable support 5V/2A 9V/2A 12V/1.5A (18W)
Output: Built-in cable L, 5V/2A

POWER BANK WITH BUILT IN CABLE



ITC-B06-1/-2/-3/-4/-5

10000-50000MAH

Specs: 2A/PD22.5W

ITC-B16-1/-2/-3/-4/-5

10000-50000MAH

Specs: 2A/PD22.5W

ITC-E03C-1/-2/-3/-4/-5

10000-50000MAH

Specs: 2A/PD22.5W

ITC-Z11C-4&ITC-Z11C-5

30000&50000MAH

Specs: 2A/PD22.5W

ITC-Z10C-1&ITC-Z10C-2

10000-50000MAH

Specs: 2A/PD22.5W

ITC-F03C-1/-2/-3/-4/-5

10000-50000MAH

Specs: 2A/PD22.5W

ITC-B03C-1/-2/-3/-4/-5

10000-50000MAH

Specs: 2A/PD22.5W

ITC-B09C-1/-2/-3/-4/-5

10000-50000MAH

Specs: 2A/PD22.5W

ITC-B12C-1/-2

10000-20000MAH

Specs: 2A/PD22.5W

POWER BANK WITH BUILT IN CABLE



ITC-K01S
10000mAh(1376074*1)

Specs: 2A+5W/PD22.5W+15W
Size: 107.3*69*19.8mm



ITC-K01
10000mAh(1260110*1)

Specs: 2A+5W/PD22.5W+15W
Size: 142.2*69*17.3mm



ITC-K02
20000mAh(1260110*2)

Specs: 2A+5W/PD22.5W+15W
Size: 142.2*69*29.3mm



ITC-K03
30000mAh(1260110*3)

Specs: 2A+5W/PD22.5W+15W
Size: 142.2*69*41.3mm



ITC-K05
50000mAh(1260110*5)

Specs: 2A+5W/PD22.5W+15W
Size: 142.2*69*53.3mm



ITC-K01SC
10000mAh(1376074*1)

Specs: 2A+5W/PD22.5W+15W
Size: 107.3*69*20.8mm



ITC-K01C
10000mAh(1260110*1)

Specs: 2A+5W/PD22.5W+15W
Size: 142.2*69*18.3mm



ITC-K02C
20000mAh(1260110*2)

Specs: 2A+5W/PD22.5W+15W
Size: 142.2*69*30.3mm



ITC-K03C
30000mAh(1260110*3)

Specs: 2A+5W/PD22.5W+15W
Size: 142.2*69*42.3mm



ITC-K05C
50000mAh(1260110*5)

Specs: 2A+5W/PD22.5W+15W
Size: 142.2*69*54.3mm

Specifications

2A+5W

Input:TYPE-C1 5V/2A
Output:Type-C2 5V/2A
Output:USB 5V/2A
Output:Wireless 5W

Specifications

2A+5W

Input:TYPE-C1 5V/2A
Input:TYPE-C2 5V/2A
Output:Type-C2 5V/2A
Output:USB 5V/2A
Output:Wireless 5W

Specifications

PD22.5W+15W

Input:TYPE-C1 5V/2A 9V/2A 12V/1.5A
Input:TYPE-C2 5V/2.4A 9V/2A 12V/1.5A
Output:TYPE-C2 5V/3A 9V/2.2A 12V/1.67A
Output:USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A+5W

Input:TYPE-C1 5V/2A
Output:Type-C2 5V/2A
Output:USB 5V/2A
Output:Wireless 5W

Specifications

2A+5W

Input:TYPE-C1 5V/2A
Input:TYPE-C2 5V/2.4A 9V/2A 12V/1.5A
Output:Type-C2 5V/2A
Output:USB 5V/2A
Output:Wireless 5W

Specifications

PD22.5W+15W

Input:TYPE-C1 5V/2A 9V/2A 12V/1.5A
Input:TYPE-C2 5V/2.4A 9V/2A 12V/1.5A
Output:TYPE-C2 5V/3A 9V/2.2A 12V/1.67A
Output:USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A



ITC-H03
5000mAh

Specs: 2A+5W/20W+15W(Magnetic)
Size: 93.7*63.8*14.6mm



ITC-H03-1
10000mAh

Specs: 2A+5W/22.5W+15W(Magnetic)
Size: 108.8*69.2*16.4mm



ITC-H03-2
10000mAh

Specs: 2A+5W/22.5W+15W(Magnetic)
Size: 113.4*67*17.5mm



ITC-H04
10000mAh

Specs: 2A+5W/22.5W+15W(Magnetic)
Size: 145*69*17.5mm



ITC-H15-1
10000mAh

Specs: 2A+5W/22.5W+15W(Magnetic)
Size: 108.8*69.2*16.4mm



ITC-H15L-1
10000mAh

Specs: 2A+5W/22.5W+15W(Magnetic)
Size: 108.8*69.2*16.4mm



ITC-H16-1
10000mAh

Specs: 2A+5W/22.5W+15W(Magnetic)
Size: 108.8*69.2*16.4mm



ITC-H16L-1
10000mAh

Specs: 2A+5W/22.5W+15W(Magnetic)
Size: 108.8*69.2*16.4mm

Specifications

2A+5W

Input: TYPE-C 5V/2A
Output: USB 5V/2A
Output: Magnetic Wireless 5W

Specifications

2A+5W

Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB 5V/2A
Output: Magnetic Wireless 5W

Specifications

PD20W+15W

Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A
Output: Magnetic Wireless 15W/10W/7.5W/5W

Specifications

PD22.5W+15W

Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: Magnetic Wireless 15W/10W/7.5W/5W

Specifications

2A+5W

Input: TYPE-C 5V/2A
Output: USB 5V/2A
Output: Magnetic Wireless 5W

Specifications

2A+5W

Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB 5V/2A
Output: Magnetic Wireless 5W

Specifications

PD20W+15W

Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A
Output: Magnetic Wireless 15W/10W/7.5W/5W

Specifications

PD22.5W+15W

Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: Magnetic Wireless 15W/10W/7.5W/5W

POWER BANK WITH MAGNETIC WIRELESS



ITC-B15C-1
10000mAh

Specs: 2A+5W/22.5W+15W(Magnetic)
Size: 150.1*67.4*17.8mm



ITC-B15C-2
20000mAh

Specs: 2A+5W/22.5W+15W(Magnetic)
Size: 150*68*29.5mm



ITC-B15-1
10000mAh

Specs: 2A+5W/22.5W+15W(Magnetic)
Size: 149.4*67.4*16.3mm



ITC-B15-2
20000mAh

Specs: 2A+5W/22.5W+15W(Magnetic)
Size: 150*68*28mm



ITC-B13C-1
10000mAh

Specs: 2A+5W/22.5W+15W(Magnetic)
Size: 150.1*67.4*17.8mm



ITC-B13C-2
20000mAh

Specs: 2A+5W/22.5W+15W(Magnetic)
Size: 150*68*29.5mm



ITC-B13-1
10000mAh

Specs: 2A+5W/22.5W+15W(Magnetic)
Size: 149.4*67.4*16.3mm



ITC-B13-2
20000mAh

Specs: 2A+5W/22.5W+15W(Magnetic)
Size: 150*68*28mm

Specifications

2A+5W

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Output: Magnetic Wireless 5W

If Built-in 3 cable output:
Output: Built-in cable C, 5V/2A
Output: Built-in cable L/M, 5V/2A

Specifications

2A+5W

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Output: Magnetic Wireless 5W

Specifications

PD22.5W+15W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.2A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: Magnetic Wireless 15W/10W/7.5W/5W

If Built-in 3 cable output:
Output: Built-in cable C, Data cable support 5V/2A 9V/2A 12V/1.5A (18W)
Output: Built-in cable L/M, 5V/2A

Specifications

2A+5W

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Output: Magnetic Wireless 5W

If Built-in 3 cable output:
Output: Built-in cable C, 5V/2A
Output: Built-in cable L/M, 5V/2A

Specifications

2A+5W

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Output: Magnetic Wireless 5W

Specifications

PD22.5W+15W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.2A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: Magnetic Wireless 15W/10W/7.5W/5W

If Built-in 3 cable output:
Output: Built-in cable C, Data cable support 5V/2A 9V/2A 12V/1.5A (18W)
Output: Built-in cable L/M, 5V/2A

FRUIT POWER BANK



ITC-C21
3600MAH/2000MAH

Specs: 1A
Size: 72*76*24mm



ITC-C22
10000mAh

Specs: 2A
Size: 109*74*20mm



ITC-Y02
5000mAh

Specs: 2A
Size: 99*63*15mm



ITC-Y02-2
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 100*63*27mm



ITC-Y02-4
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 142*70*17mm



ITC-Y02-6
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 142*70*29mm



ITC-Y02-8
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 82*82*27mm



ITC-Y02-1
5000mAh

Specs: 2A
Size: 99*63*15mm



ITC-Y02-3
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 100*63*27mm



ITC-Y02-5
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 142*70*17mm



ITC-Y02-7
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 142*70*29mm



ITC-Y02-9
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 82*82*27mm

Specifications

1A

Material: ABS+PC+UV+Color Printing
Input: MICRO 5V/1A
Output: USBA 5V/1A

Specifications

2A

Material: ABS+PC+UV+Color Printing
Input: MICRO 5V/2A
Output: USBA 5V/2A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

HAND WARMER POWER BANK



ITC-R01

5200MAH/5000MAH/4000MAH
(18650*2)

Specs: 2A
Size: 87*62.8*32mm

Specifications

2A

Material: ABS+PC(fireproof)+Aluminum +Rubber
Input: TYPE-C 5V/2A
Output: USB 5V/2A
Heating temperature: 45°C 50°C 55°C



ITC-R02

5200MAH/5000MAH/4000MAH
(18650*2)

Specs: 2A
Size: 101.5*59*23.5mm

Specifications

2A

Material: ABS+PC(fireproof)+Aluminum +Rubber
Input: MICRO 5V/2A
Output: USB 5V/2A
Heating temperature: 42°C 47°C 52°C



ITC-R13

6000mAh(104060*2)

Specs: 2A
Size: 82.6*73*32mm

Specifications

2A

Material: ABS+PC(fireproof)+Aluminum +Rubber
Input: TYPE-C 5V/2A
Output: USB 5V/2A
Heating temperature: 52°C



ITC-R14

10000mAh(955465*2)

Specs: 2A
Size: 103*68*27mm

Specifications

2A

Material: ABS+PC(fireproof)+Aluminum +Rubber
Input: TYPE-C 5V/2A
Output: USB 5V/2A
Heating temperature: 52°C



ITC-W01
WIRELESS CHARGER

Specs: 15W
Size: 99*9mm



ITC-W03
WIRELESS CHARGER

Specs: 15W
Size: 99*9mm



ITC-W04
WIRELESS CHARGER

Specs: 15W
Size: 99*96*10mm



ITC-W02
WIRELESS CHARGER

Specs: 15W
Size: 89*10mm



ITC-W05
WIRELESS CHARGER

Specs: 15W
Size: 89*10mm



ITC-W06
WIRELESS CHARGER

Specs: 15W
Size: 89*10mm



ITC-W07
WIRELESS CHARGER

Specs: 15W
Size: 90*10mm

Specifications

15W

Material: ABS+non-slip silicone
Output: Wireless 15W/10W/7.5W/5W
Input: TYPE-C 9V/1.67A 9V/2A

Specifications

15W

Material: ABS+non-slip silicone
Output: Wireless 15W/10W/7.5W/5W
Input: TYPE-C 9V/1.67A 9V/2A



ITC-CC015U
Car Charger

Specs: PD45W
Size: 73*33*33mm



ITC-CC017U
Car Charger

Specs: PD45W
Size: 73*33*33mm



ITC-CC021U
Car Charger

Specs: PD45W
Size: 73*33*33mm



ITC-CC015C
Car Charger

Specs: PD63W
Size: 73*33*33mm



ITC-CC017C
Car Charger

Specs: PD63W
Size: 73*33*33mm



ITC-CC021C
Car Charger

Specs: PD63W
Size: 73*33*33mm

Material: Zinc alloy +PC
Support agreement:
USB1 port supports protocol QC2.0/QC3.0/AFC/FCP/SCP/VOOC;
USB2 port supports protocol QC2.0/QC3.0/AFC/FCP;

Output power:
USB1 output: 4.5V/5A; 5V/4.5A; 5V/3.6A; 9V/2.5A; 12V/2.25A (27W Max)
USB2 output: 5V/3.4A; 9V/2A; 12V/1.5A (18W Max)
Total output power:
USB1+USB2 output: 27W+18W (45W MAX)

Material: Zinc alloy +PC
Support agreement:
USB-A port: QC2.0/QC3.0/AFC/FCP/SCP;
USB-C port: support PD2.0/PD3.0/PPS/QC2.0/QC3.0/AFC/FCP;

Input voltage: DC12-24V
Output power:
USB port output: 5V/3.4A; 9V/2A; 12V/1.5A (18W Max)
Type-C output: 5V/3.6A; 9V/3A; 12V/2.25A; 20V/2.25A (45W Max)
Total output power: 63W (USB1 port 18W+Type-C port 45W)
When 12V voltage input: USB port (18W)+Type-C port (27W) total output power 45W (Max)
When 24V voltage input: USB port (18W) + Type-C port (45W) total output power 63W (Max)

PD30W-100W CAR CHARGER



ITC-CC013

Car Charger

Specs: PD90W
Size: 61.4*60.4*31mm



ITC-CC018

Car Charger

Specs: PD69W
Size: 94.05*32.93*60.88mm



Material: PC+ABS

Support agreement:

USB1: QC2.0/QC3.0/AFC/FCP/SCP/SFCP/VOOC

USB2: QC2.0/QC3.0/AFC/FCP

USB3: QC2.0/QC3.0/AFC/FCP/SCP/SFCP

Type-C: PD2.0/PD3.0/PPS

Input voltage: DC12-24V

Output power:

USB1 output: 4.5V-5A; 5V-4.5A; 5V-3.6A; 9V-2.5A; 12V-2.25A (27W Max)

USB2 output: 5V-3.4A; 9V-2A; 12V-1.5A (18W Max)

USB3 output: 4.5V-5A; 5V-4.5A; 5V-3.6A; 9V-2.5A; 12V-2A (24W Max)

Type-C output: 5V-3.6A; 9V-3A; 12V-2.25A; 20V-2.25A (45W Max)

Total output power: 150W (Max) 27W+18W+45W+60W

USB1 output power: 27W (Max)

USB2 output power: 18W (Max)

Independent use of USB*3 and Type-C Output power: 45W (Max)

Chimney Lighting Power: 60W

Material: PC+ABS+ aluminum alloy

Support agreement:

USB-A port: QC2.0/QC3.0/AFC/FCP/SCP/VOOC;

USB-C port: support PD2.0/PD3.0/PPS/QC2.0/QC3.0/AFC/FCP;

Input voltage: DC12-24V

Output power:

USB port output: 4.5V/5A; 5V/4.5A; 5V/3.6A; 9V/2.5A; 12V/2A (24W Max)

Type-C port output: 5V/3.6A; 9V/2.5A; 12V/2.25A; 20V/2.25A (45W Max)

Total output power:

When 12V voltage input: USB port (24W)+Type-C port (27W) total output power 51W (Max)

When 24V voltage input: USB port (24W)+Type-C port (45W) total output power 69W (Max)

Total output power of cigarette lighter: <80W (does not support cigarette lighting function)

PD30W-100W CAR CHARGER



ITC-CC020

Car Charger

Specs: PD69W
Size: 86*20.6*20.6mm



Material: Aluminum alloy +PC+ABS

Support agreement:

USB1: QC2.0/QC3.0/AFC/FCP/SCP/SFCP/VOOC

USB2: QC2.0/QC3.0/AFC/FCP/SCP/SFCP/VOOC

Type-C: PD2.0/PD3.0/PPS

Input voltage: DC12-24V

Output power:

USB1 output: 4.5V-5A; 5V-4.5A; 5V-3.6A; 9V/2.5A; 12V-2A (24W Max)

USB2 output: 4.5V-5A; 5V-4.5A; 5V-3.6A; 9V-2.5A; 12V-2A (24W Max)

Type-C port output: 5V-3.6A; 9V-3A; 12V-2.25A; 20V-2.25A (45W Max)

Total output power:

When 12V voltage input: USB port (24W)+Type-C port (27W) total output power 51W (Max)

When 24V voltage input: USB port (24W)+Type-C port (45W) total output power 69W (Max)

Total output power of cigarette lighter: <80W (does not support cigarette lighting function)

PD30W-100W CAR CHARGER



ITC-CC022U

Car Charger

Specs: PD20W
Size: 57.1mm*28.2mm

Material: ABS+PC

Support protocol: QC2.0/QC3.0/AFC/FCP/SCP;

Input voltage: DC12-24V

Output power:

USB-A1 port output: 5V/3A; 9V/2A; 12V/1.67A (20W Max)

USB-A2 port output: 5V/3A; 9V/2A; 12V/1.67A (20W Max)

Total output power:

Two ports are used at the same time Total output power: 5V/3A Max: 5V/3A (MAX)



ITC-CC022C

Car Charger

Specs: PD30W
Size: 57.1mm*28.2mm

Material: ABS+PC

Support agreement:

USB-A port: QC2.0/QC3.0/AFC/FCP/SCP;

USB-C port: support PD2.0/PD3.0/PPS/QC2.0/QC3.0/AFC/FCP;

Input voltage: DC12-24V

Output power:

USB-A port output: 5V/3A; 9V/2A; 12V/1.5A (18W Max)

USB-C port output: 5V/3A; 9V/2A; 12V/2.5A (30W Max)

Total output power:

Two ports are used at the same time Total output power: 5V/3A Max: 5V/3A (MAX)



ITC-C33

10000mAh(9065113*1)

Specs: PD22.5W+15W
Size: Power bank:150*72*11mm
Charging dock:142*85*24mm

Specifications

PD22.5W+15W

Detachable Power bank with wireless charge(PD22.5+15W) Material: ABS +silicone
Input: TYPE-C 5V/2.5A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2.22A 12V/1.67A (PD20W)
Output: USB 5V/4.5A 9V/2A 12V/1.5A (PD22.5W)
Wireless charging: 5W/7.5W/10W/15W
Frequency: 110-220kHz
Wireless Dock(15W) Input: TYPE-C 5V/3A 9V/3A
Output: USB 5V/2A
Wireless charging: 5W/7.5W/10W/15W
Frequency: 110-220kHz



ITC-SZ06

5-in-1 Wireless Charger With Alarm Clock

Specs: 15W+3W
Size: 139*70*13.5mm

Specifications

15W+3W

Material: ABS+Silicone+metal
Input: TYPE-C DC5V/2A 9V/2A
Output: Wireless charging 5W/7.5W/10W/15W max
Charging Efficiency: ≥73%
Working Frequency range: 110-205KHz
Output: Wireless charging (Headphone) 3W max
Charing Distance: ≤6mm
Charging Standard: Compatible with WPC Qi V1.2.4



ITC-SZ10

3-in-1 Magnetic Wireless Charger

Specs: 15W+3W
Size: 125*102*83.5mm

Specifications

15W+3W

Material: ABS+Silicone
Input: TYPE-C DC5V/2A 9V/2A
Output: Wireless charging 5W/7.5W/10W/15W max
Charging Efficiency: ≥ 73%
Working Frequency range: 110-205KHz
Output: Wireless charging (Headphone) 3W max
Charing Distance: ≤6mm
Charging Standard: Compatible with WPC Qi V1.2.4



ITC-SZ08(Round)&ITC-SZ09(Square)

2-in-1 Wireless Charger

Specs: 15W+3W+3W
Size: 65*21mm

Specifications

15W+3W+3W

Material: ABS
Input: TYPE-C DC5V/2A 9V/2A
Output: Wireless charging 5W/7.5W/10W/15W max
Charging Efficiency: ≥ 73%
Working Frequency range: 110-205KHz
Output: Wireless charging (Headphone) 3W max
Output: Wireless charging (Watch) 3W max
Charing Distance: ≤6mm
Charging Standard: Compatible with WPC Qi V1.2.4



ITC-SZ01

Alarm clock Wireless Charger

Specs: 15W
Size: 110*80*75mm

Parameters: Material: ABS+Silicone
Charging power: 15W
Charging distance: ≤6mm
Charging Efficiency: 75%
USB: Type C
Charging Standard: Qi
Features: Time display: 12H/24H Optional
Years: 2000-2099
Temperature display: Mini: -50°C Max: 97°C
Alarm Clock: 3 sets of alarm clock Settings
15W Wireless Charging Pad



ITC-SZ04

5-in-1 Magnetic Wireless Charger

Specs: 15W+3W+2W
Size: 117.6*112.6*83.8mm

Parameters: Material: ABS+Silicone
Input: Type-C DCSV/2A, 9V/1.67A
Output: Wireless charging 5W/7.5W/10W/15W
Working Frequency range: 110-205KHz
Output: Wireless charging (AirPods) 3W
Output: Wireless charging (Apple watch) 2W
Charging Distance: ≤6mm
Charging Efficiency: ≥ 73%
Charging Standard: Compatible with WPC Qi V1.2.4
Features: Time display: 12/24H optional
Alarm clock: Set two alarm
Backlight LOGO
Magnetic Wireless charge: 15W max.
Table Lamp(High light &low light for option)



ITC-SZ02

Alarm Clock Wireless Charger

Specs: 15W
Size: 168*116.5*116.5mm

Parameters: Material:ABS
Input Type C: 5V/2A,9V/1.67A
Output Wireless: 5W/7.5W/10W/15W
Charing Distance: ≤6mm
Charging Efficiency: 75%
Charging Standard: Qi
Features: Time display: 12/24H optional
Date display: Month and date
Alarm clock: Set two alarm
Temperature display: Degrees Celsius or Fahrenheit (C°/F°)
Wireless charge: 15W max.



ITC-SZ03

Alarm Clock Wireless Charger

Specs: 15W
Size: 187*130*42mm

Parameters: Material: ABS+Silicone
Input Type-C: 5V/2A, 9V/2A,12V/1.25A
Output Wireless: 5W/7.5W/10W/15W
Output USB 1/2: 5V/2.4A each
Output USB 1+USB2: 5V/3A share
Charing Distance: ≤6mm
Charging Efficiency: 75%
Charging Standard: Compatible with WPC Qi V1.2.4
Features: Time display: 12/24H optional
Date display: Month and date
Alarm clock: Set two alarm
Temperature display: Degrees Celsius or Fahrenheit (C°/F°)
Wireless charge: 15W max.

SOLAR POWER BANK



ITC-1705B-2

10000mAh(9265115*1)

Specs: PD22.5W+15W
Size: 154*75.5*16mm



ITC-2105

10000mAh(1260110*1)

Specs: PD22.5W+15W(magnetic)
Size: 139*75*20mm



ITC-2107

20000mAh(1260110*2)

Specs: PD22.5W+15W(magnetic)
Size: 161.5*87*31mm

SOLAR POWER BANK



ITC-202E

20000mAh(1260110*2)

Specs: PD22.5W+15W(magnetic)
Size: 176*93*33mm

Specifications

PD22.5W+15W

Material: ABS+PU+Solar panel
Solar panel: monocrystalline silicon (each solar panel power : 5.5V/235mA: 1.3W)
Input: Micro 5V/2A 9V/2A
Input: Type-C 5V/2.4A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB A1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB A2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: Wireless charge 15W/10W/7.5W/5W

Specifications

PD22.5W+15W

Material: ABS+Solar panel
Solar panel: monocrystalline silicon (5.5V/235mA: 1.3W)
Input: Micro 5V/2A 9V/2A
Input: Type-C 5V/2.4A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB A1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: Magnetic wireless charge 15W/10W/7.5W/5W

Specifications

PD22.5W+15W

Material: ABS +Solar panel
Solar panel: monocrystalline silicon (5.5V/235mA: 1.3W)
Input: Micro 5V/2A 9V/2A
Input: Type-C 5V/2.4A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB A1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB A2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: Magnetic wireless charge 15W/10W/7.5W/5W

Specifications

PD22.5W+15W

Material: ABS +TPU+PC+Solar panel
Solar panel: monocrystalline silicon (5.5V/235mA: 1.3W)
Input: Micro 5V/2A 9V/2A
Input: Type-C 5V/2.4A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB A1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB A2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: Magnetic wireless charge 15W/10W/7.5W/5W



QUALITY CERTIFICATE

