




# ITC

Make Life Easier

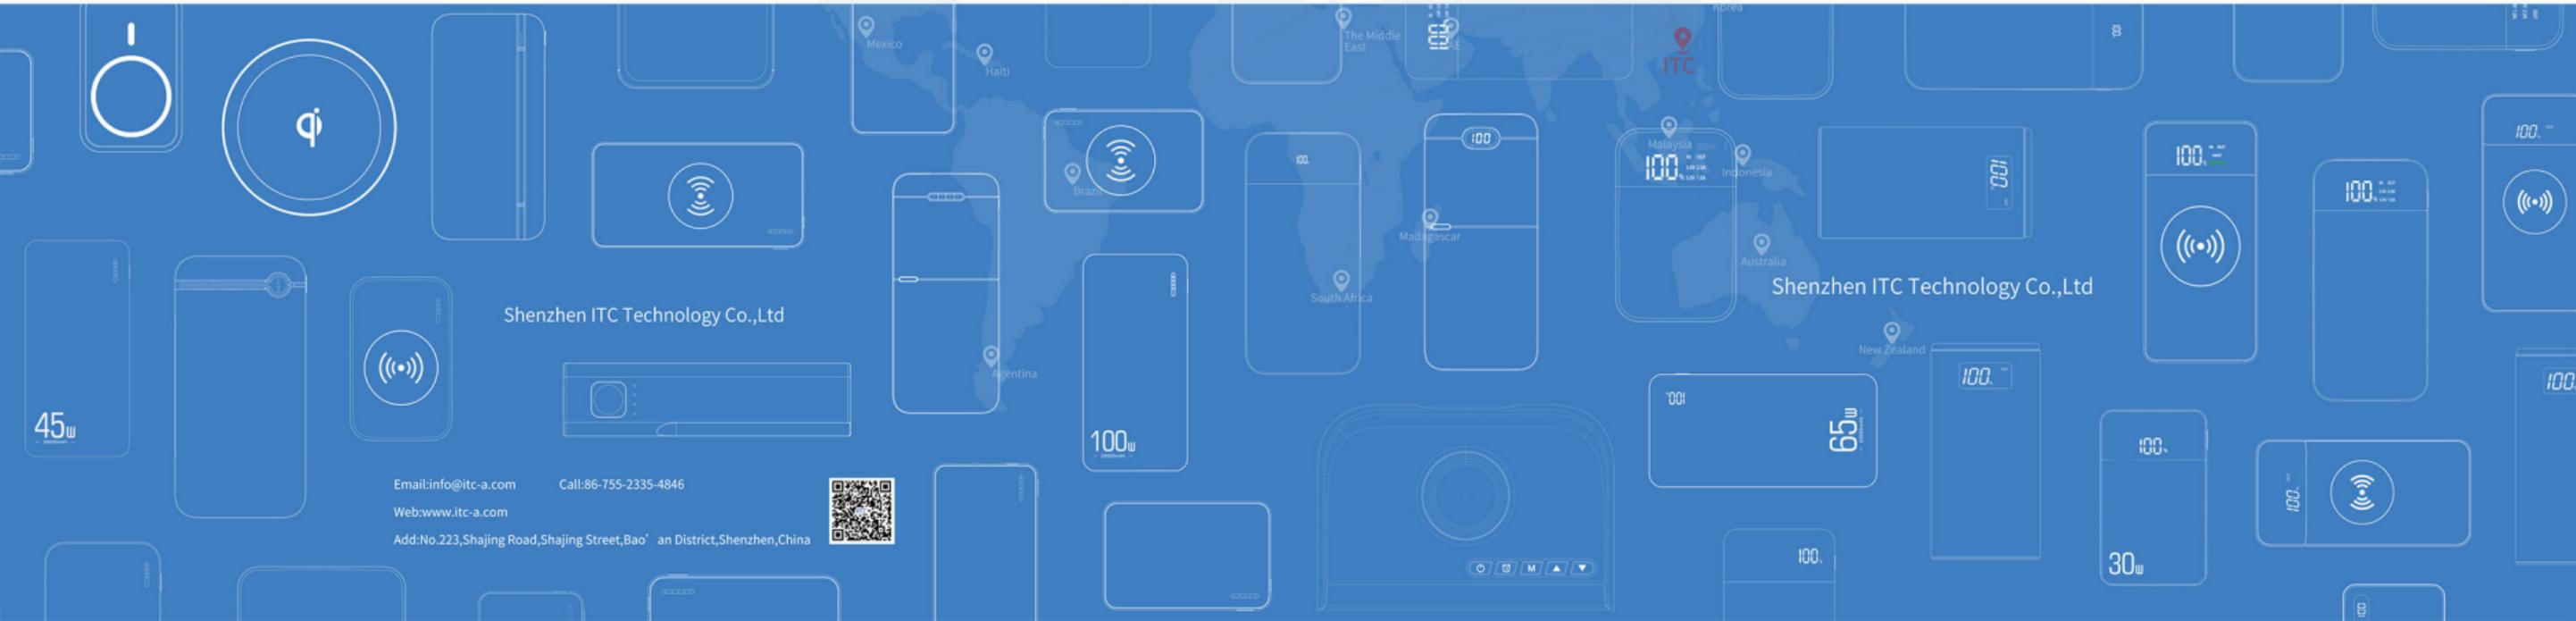

Shenzhen ITC Technology Co.,Ltd

Shenzhen ITC Technology Co.,Ltd

Email:info@itc-a.com

Call:86-755-2335-4846

Web:www.itc-a.com

Add:No.223,Shajing Road,Shajing Street,Bao'an District,Shenzhen,China





# ABOUT COMPANY

Shenzhen ITC Technology Co., Ltd. was established in 2007 and is located in Shenzhen, China. It is a high-tech enterprise that integrates research and development, production, and sales. The company's main products include power banks, wireless chargers, car chargers, car-mounted wireless chargers, Bluetooth speakers, and other computer and mobile phone peripheral accessories. In the future, the company plans to expand its product range to include fast charging, outdoor energy storage, and new energy products. Our development goal is to become an expert in the new generation of mobile power banks.

With 16 years of experience in R&D, production, and export, we have become one of the most professional and competitive manufacturers. Our customers come from all over the world, including the US, Europe, Middle East, Southeast Asia etc. They include companies in promotion, agency, branding, supermarkets, and chain stores such as Walmart, Timberland, Nautica, Kooba, Steve Madden, Mont Blanc, JMC, Costco, and Greenhouse etc.

ITC has a 2,000 square meter SMT workshop with two advanced Japanese SMT machines, a 8,000 square meter injection and assembly workshop with over 300 workers, 12 sets of mold machines, 8 sets of injection machines, and 16 assembly production lines that ensure a daily capacity of approximately 50,000 units. Additionally, 20 sets of full-auto aging equipment can perform aging tests of 10,000 finished products simultaneously.

Our strong R&D team of around 15 employees covers senior design engineers, senior hardware and software engineers, testing engineers, and other technical members who enhance our technology strength. Our R&D team never stops innovating and creating. We develop more than 200 models and 5-6 new private molds each month.

ITC has passed audits by ISO9001, BSCI, and AF, and all products produced by ITC are in line with international certifications such as CE, FCC, RoHS, PSE, UL, CNS, KC, CB, and Qi. All incoming materials undergo rigorous inspection before production and assembling, while finished products undergo professional aging tests. With rich experience in this field, we are dedicated to providing high-quality products and excellent design solutions to all our customers.

"Growing together with our customers" is our operating philosophy. We always prioritize the benefits of our customers and strive to achieve development and profitability through quality optimization. We firmly believe that the quality we provide today lays the foundation for tomorrow's success in the market.



## QUALITY CERTIFICATE

# CONTENTS

SUPER SLIM POWER BANK	01-10	37-38	ALUMINUM ALLOY POWER BANK
POWER BANK	11-14&33-35	39-40	HIGH-CAPACITY POWER BANK
POWER BANK WITH LED BACKLIGHT	15-18	41	FRUIT POWER BANK
POWER BANK WITH WIRELESS	19-22	42	HAND WARMER POWER BANK
POWER BANK WITH MAGNETIC WIRELESS	23-26	43-44	WIRELESS CHARGING PAD
PD30W-100W POWER BANK	27-30&51-52	45-48	MULTI-FUNCTIONAL CHARGER
POWER BANK WITH BUILT IN CABLE	31-32	49-50	SOLAR POWER BANK
POWER BANK WITH LEATHER TEXTURE	36		

## 2024 SUPER SLIM SERIES

Slimmest size  
only 0.39 inch thick



5000  
mAh

10000  
mAh

20000  
mAh



ITC-M01S

5000mAh(706074)

Specs: 2A/PD20W/PD22.5W  
Size: 103.8\*68\*10mm



ITC-M02

10000mAh(146074)

Specs: 2A/PD20W/PD22.5W  
Size: 103.8\*68\*17mm



ITC-M01

5000mAh(6458102)

Specs: 2A/PD20W/PD22.5W  
Size: 131.8\*66.2\*10.5mm



ITC-M03

10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W  
Size: 131.8\*66.2\*13.2mm



ITC-M04

20000mAh(9858102\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 131.8\*66.2\*23mm



ITC-N01S

5000mAh(706074)

Specs: 2A/PD20W/PD22.5W  
Size: 103.8\*68\*10mm



ITC-N02

10000mAh(706074)

Specs: 2A/PD20W/PD22.5W  
Size: 103.8\*68\*17mm



ITC-N01

5000mAh(6458102)

Specs: 2A/PD20W/PD22.5W  
Size: 131.8\*66.2\*10.5mm



ITC-N03

10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W  
Size: 131.8\*66.2\*13.2mm



ITC-N04

20000mAh(9858102\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 131.8\*66.2\*23mm

Specifications

2A

Material: ABS  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

2A

Material: ABS  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A

Material: ABS+PC  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

2A

Material: ABS+PC  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS+PC  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS+PC  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A



ITC-ML01  
5000mAh(6458102)

Specs: 2A/PD20W/PD22.5W  
Size: 130.5\*62.5\*8.8mm



ITC-ML03  
10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W  
Size: 130.5\*62.5\*12.2mm



ITC-ML04  
20000mAh(9858102\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 130.5\*62.5\*22mm



ITC-NL01  
5000mAh(6458102)

Specs: 2A/PD20W/PD22.5W  
Size: 130.5\*62.5\*8.8mm



ITC-NL03  
10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W  
Size: 130.5\*62.5\*12.2mm



ITC-NL04  
20000mAh(9858102\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 130.5\*62.5\*22mm

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A



ITC-MS01  
5000mAh(606280)

Specs: 2A/PD20W/PD22.5W  
Size: 108.5\*66.5\*8.8mm



ITC-MS03  
10000mAh(126280)

Specs: 2A/PD20W/PD22.5W  
Size: 108.5\*66.5\*14.8mm



ITC-MS04  
20000mAh(126280\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 108.5\*66.5\*26.8mm



ITC-NS01  
5000mAh(606280)

Specs: 2A/PD20W/PD22.5W  
Size: 108.5\*66.5\*8.8mm



ITC-NS03  
10000mAh(126280)

Specs: 2A/PD20W/PD22.5W  
Size: 108.5\*66.5\*14.8mm



ITC-NS04  
20000mAh(126280\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 108.5\*66.5\*26.8mm

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A



ITC-MX01  
5000mAh(706074)

Specs: 2A/PD20W/PD22.5W  
Size: 102.5\*64.5\*9.8mm



ITC-MX03  
10000mAh(1376074)

Specs: 2A/PD20W/PD22.5W  
Size: 102.5\*64.5\*16.5mm



ITC-MX04  
20000mAh(1376074\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 102.5\*64.5\*30.2mm



ITC-NX01  
5000mAh(706074)

Specs: 2A/PD20W/PD22.5W  
Size: 102.5\*64.5\*9.8mm



ITC-NX03  
10000mAh(1376074)

Specs: 2A/PD20W/PD22.5W  
Size: 102.5\*64.5\*16.5mm



ITC-NX04  
20000mAh(1376074\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 102.5\*64.5\*30.2mm

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A



ITC-D01  
5000mAh

Specs: 2A  
Size: 100\*63.8\*15.8mm



ITC-D02  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 100\*63.8\*26.8mm



ITC-D03  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.8\*17.5mm



ITC-D04  
20000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.8\*28mm



ITC-D05  
30000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.8\*40mm



ITC-P01  
5000mAh

Specs: 2A  
Size: 100\*63.8\*15.8mm



ITC-P02  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 100\*63.8\*26.8mm



ITC-P03  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.8\*17.5mm



ITC-P04  
20000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.8\*28mm



ITC-P05  
30000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.8\*40mm

## Specifications

2A

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

2A

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

PD20W

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

## Specifications

PD22.5W

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

## Specifications

2A

Material: ABS+PC  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

2A

Material: ABS+PC  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

PD20W

Material: ABS+PC  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

## Specifications

PD22.5W

Material: ABS+PC  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A



**ITC-S1**  
5000mAh

Specs: 2A  
Size: 100\*63.3\*13.5mm

**ITC-S2**  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 100\*63.3\*23mm

**ITC-S3**  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 152\*73.3\*14.5mm

**ITC-S4**  
20000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 152\*73.3\*23.8mm

**ITC-S5**  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.44\*15.7mm

**ITC-S6**  
20000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.44\*27.7mm

**ITC-T1**  
5000mAh

Specs: 2A  
Size: 100\*63.3\*13.5 mm

**ITC-T2**  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 100\*63.3\*23mm

**ITC-T3**  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 152\*73.3\*14.5mm

**ITC-T4**  
20000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 152\*73.3\*23.8mm

**ITC-T5**  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.44\*15.7mm

**ITC-T6**  
20000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.44\*27.7mm

## Specifications

2A

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

2A

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

PD20W

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

## Specifications

PD22.5W

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

## Specifications

2A

Material: ABS+PC  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

2A

Material: ABS+PC  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

PD20W

Material: ABS+PC  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

## Specifications

PD22.5W

Material: ABS+PC  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

# 5000mAh/10000mAh LED logo gift power bank



## POWER BANK WITH LED BACKLIGHT



**ITC-ML01**  
5000mAh(6458102)

Specs: 2A+Backlight  
Size: 130.5\*62.5\*8.8mm



**ITC-ML03**  
10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 130.5\*62.5\*12.2mm



**ITC-NL01**  
5000mAh(6458102)

Specs: 2A+Backlight  
Size: 130.5\*62.5\*8.8mm



**ITC-NL03**  
10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 130.5\*62.5\*12.2mm

### Specifications

**2A+Backlight**

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Backlight: LOGO

### Specifications

**2A+Backlight**

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Backlight: LOGO

### Specifications

**PD20W+Backlight**

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A  
Backlight: LOGO

### Specifications

**PD22.5W+Backlight**

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Backlight: LOGO



ITC-P01  
5000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 100\*63.8\*15.8mm



ITC-P02  
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 100\*63.8\*26.8mm



ITC-P03  
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 140\*68.8\*17.5mm



ITC-T3  
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 152\*73.3\*14.5mm



ITC-D01  
5000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 100\*63.8\*15.8mm



ITC-D02  
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 100\*63.8\*26.8mm



ITC-D03  
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 140\*68.8\*17.5mm



ITC-S3  
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 152\*73.3\*14.5mm

## Specifications

## 2A+Backlight

Material: ABS+PC  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Backlight: LOGO

## Specifications

## 2A+Backlight

Material: ABS+PC  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Backlight: LOGO

## Specifications

## PD20W+Backlight

Material: ABS+PC  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A  
Backlight: LOGO

## Specifications

## PD22.5W+Backlight

Material: ABS+PC  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Backlight: LOGO

## Specifications

## 2A+Backlight

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Backlight: LOGO

## Specifications

## 2A+Backlight

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Backlight: LOGO

## Specifications

## PD20W+Backlight

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A  
Backlight: LOGO

## Specifications

## PD22.5W+Backlight

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Backlight: LOGO



ITC-D01-W  
5000mAh

Specs: 2A+5W/20W+15W  
Size: 100\*63.8\*15.8mm



ITC-D02-W  
10000mAh

Specs: 2A+5W/20W+15W  
Size: 100\*63.8\*26.8mm



ITC-D03-W  
10000mAh

Specs: 2A+5W/22.5W+15W  
Size: 140\*68.8\*17.5mm



ITC-D04-W  
20000mAh

Specs: 2A+5W/22.5W+15W  
Size: 140\*68.8\*28mm



ITC-P01-W  
5000mAh

Specs: 2A+5W/20W+15W  
Size: 100\*63.8\*15.8mm



ITC-P02-W  
10000mAh

Specs: 2A+5W/20W+15W  
Size: 100\*63.8\*26.8mm



ITC-P03-W  
10000mAh

Specs: 2A+5W/22.5W+15W  
Size: 140\*68.8\*17.5mm



ITC-P04-W  
20000mAh

Specs: 2A+5W/22.5W+15W  
Size: 140\*68.8\*28mm

## Specifications

2A+5W

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Output: Wireless 5W

## Specifications

2A+5W

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Output: Wireless 5W

## Specifications

PD20W+15W

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A  
Output: Wireless 15W/10W/7.5W/5W

## Specifications

PD22.5W+15W

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: Wireless 15W/10W/7.5W/5W

## Specifications

2A+5W

Material: ABS+PC  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Output: Wireless 5W

## Specifications

2A+5W

Material: ABS+PC  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Output: Wireless 5W

## Specifications

PD20W+15W

Material: ABS+PC  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A  
Output: Wireless 15W/10W/7.5W/5W

## Specifications

PD22.5W+15W

Material: ABS+PC  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: Wireless 15W/10W/7.5W/5W



**ITC-S1-W**  
5000mAh

Specs: 2A+5W/20W+15W  
Size: 100\*63.3\*13.5mm



**ITC-S3-W**  
10000mAh

Specs: 2A+5W/22.5W+15W  
Size: 152\*73.3\*14.5mm



**ITC-S4-W**  
20000mAh

Specs: 2A+5W/22.5W+15W  
Size: 152\*73.3\*23.8mm



**ITC-T3-W**  
10000mAh

Specs: 2A+5W/22.5W+15W  
Size: 152\*73.3\*14.5mm



**ITC-T4-W**  
20000mAh

Specs: 2A+5W/22.5W+15W  
Size: 152\*73.3\*23.8mm



**ITC-T7-W**  
10000mAh

Specs: 2A+5W/22.5W+15W  
Size: 152\*73.3\*14.5mm



**ITC-T8-W**  
20000mAh

Specs: 2A+5W/22.5W+15W  
Size: 152\*73.3\*23.8mm



**ITC-C02-W**  
10000mAh

Specs: 2A+5W/22.5W+15W  
Size: 150\*72\*15mm

## Specifications

2A+5W

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Output: Wireless 5W

## Specifications

2A+5W

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Output: Wireless 5W

## Specifications

PD20W+15W

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A  
Output: Wireless 15W/10W/7.5W/5W

## Specifications

PD22.5W+15W

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: Wireless 15W/10W/7.5W/5W

## Specifications

2A+5W

Material: ABS+PC  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Output: Wireless 5W

## Specifications

2A+5W

Material: ABS+PC  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Output: Wireless 5W

## Specifications

PD20W+15W

Material: ABS+PC  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A  
Output: Wireless 15W/10W/7.5W/5W

## Specifications

PD22.5W+15W

Material: ABS+PC  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: Wireless 15W/10W/7.5W/5W

# Magnetic Wireless Power Bank 5k/10kmAh

Slim and Compact



Stronger Magnetic Connection



MS03-M  
10000mAh



MS01-M  
5000mAh

## POWER BANK WITH MAGNETIC WIRELESS



ITC-MX01-M  
5000mAh(606074)

Specs: 2A+5W/PD20W+15W(Magnetic)  
Size: 102.5\*64.5\*9.8mm



ITC-MX03-M  
10000mAh(1376074)

Specs: 2A+5W/PD20W+15W(Magnetic)  
Size: 102.5\*64.5\*16.5mm



ITC-MS01-M  
5000mAh(536280)

Specs: 2A+5W/PD20W+15W(Magnetic)  
Size: 108.5\*66.5\*8.8mm



ITC-MS03-M  
10000mAh(126280)

Specs: 2A+5W/PD20W+15W(Magnetic)  
Size: 108.5\*66.5\*14.8mm

### Specifications

2A+5W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2A  
Output: USB 5V/2A  
Output: Magnetic Wireless 5W

### Specifications

PD20W+15W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB 5V/3A 9V/2A 12V/1.5A  
Output: Magnetic Wireless 15W/10W/7.5W/5W

# POWER BANK WITH MAGNETIC WIRELESS



**ITC-S1-M**

5000mAh(955465\*1)

Specs: 2A+5W/PD20W+15W(Magnetic)  
Size: 100\*63.3\*14.82mm



**ITC-S2-M**

10000mAh(955465\*2)

Specs: 2A+5W/PD20W+15W(Magnetic)  
Size: 100\*63.3\*24.82mm



**ITC-S8-M**

5000mAh(706074\*1)

Specs: 2A+5W/PD20W+15W(Magnetic)  
Size: 105.2\*67.8\*13.9mm



**ITC-S9-M**

10000mAh(1376074\*1)

Specs: 2A+5W/PD20W+15W(Magnetic)  
Size: 105.2\*67.8\*20mm



**ITC-T2343**

10000mAh(126280\*1)

Specs: PD22.5W+15W(Magnetic)  
Size: 117\*70.5\*19.4mm



**ITC-T2329**

10000mAh(1260110\*1)

Specs: PD22.5W+15W(Magnetic)  
Size: 117.8\*50.8\*25.9mm



**ITC-LM01**

5000mAh(706074\*1)

Specs: PD22.5W+15W(Magnetic)  
Size: 102.4\*66.2\*11.5mm

## Specifications

**2A+5W**

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Output: Magnetic Wireless 5W

## Specifications

**PD20W+15W**

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1&2, 5V/3A 9V/2A 12V/1.5A  
Output: Magnetic Wireless 15W/10W/7.5W/5W

## Specifications

**2A+5W**

Material: ABS+PU  
Input: TYPE-C 5V/2A  
Output: USB 5V/2A  
Output: Magnetic Wireless 5W

## Specifications

**PD20W+15W**

Material: ABS+PU  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB 5V/3A 9V/2A 12V/1.5A  
Output: Magnetic Wireless 15W/10W/7.5W/5W

## Specifications

**PD22.5W+15W**

Material: ABS  
Input: Type-C 5V/3A 9V/2A  
Input: Type-C 5V/3A 9V/2.22A 12V/1.67A  
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A  
Output: Built-in Type-C cable 5V/3A 9V/2.22A 12V/1.67A 10W/2A  
Output: Built-in Lightning cable 5V/2A  
Output: Magnetic Wireless 9V/1.5A (15W)

## Specifications

**PD22.5W+15W**

Material: ABS  
Input: Type-C 5V/3A 9V/2A  
Input: Type-C 5V/3A 9V/2.22A 12V/1.67A  
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A  
Output: USB 4.5V/5A 5V/3A 9V/2.22A 12V/1.67A  
Output: Magnetic Wireless 9V/1.5A (15W)

## Specifications

**PD22.5W+15W**

Material: Aluminum alloy  
Input: Type-C 5V/3A 9V/2A  
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A  
Output: Magnetic Wireless 9V/1.5A (15W)



ITC-C01

9600mAh/10000mAh(18650\*3)

Specs: PD30W  
Size: 100\*62.5\*22.5mm



ITC-C01

9600mAh/10000mAh(18650\*3)

Specs: PD45W  
Size: 100\*62.5\*22.5mm



ITC-T6&ITC-P4

20000mAh(6060100\*4)

Specs: PD65W  
Size: 140\*68\*27.7mm



ITC-P5

30000mAh(6060100\*6)

Specs: PD100W  
Size: 140\*68\*39.7mm

#### Specifications

PD30W

Material: ABS  
Input: TYPE-C 5V/3.0A 9V/2.0A 12V/1.67A 15V/2A 20V/1.5A(30W max)  
Output: TYPE-C 5V/3.0A 9V/3A 12V/2.5A 15V/2A 20V/1.5A(30W max)  
PPS: 3.3V-11V/3A  
Output: USB 5V/3A 9V/2A 12V/1.67A(20W max)  
IC solution: with OCP,OVP,ODP,SCP,OTP

#### Specifications

PD45W

Material: ABS  
Input: TYPE-C 5V/3.0A 9V/2.0A 12V/1.67A 15V/2A 20V/1.5A(30W max)  
Output: TYPE-C 5V/3.0A 9V/3A 12V/3A 15V/3A 20V/2.25A(45W max)  
PPS: 3.3V-11V/3A, 3.3V-16V/3A  
Output: USB 5V/3A 9V/2A 12V/1.67A(20W max)  
IC solution: with OCP,OVP,ODP,SCP,OTP

#### Specifications

PD65W

Material: ABS+rubber oil  
Input: Micro 5V/2A 9V/2A 12V/1.5A(18W)  
Input: Type-C 5V/3A 9V/3A 12/3A 15V/3A 20V/3A(60W)  
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W max)  
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W)  
IC solution: with OCP,OVP,ODP,SCP,OTP  
Advantage: 30W discharge the device working temperature  $\leq 45^{\circ}\text{C}$ , 2h full charged by 60W power.

#### Specifications

PD100W

Material: ABS+rubber oil  
Input: Type-C1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W)  
Output: Type-C1 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A(100W max) PPS 3.3V-21V/3A  
Output: Type-C2 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A(100W max) PPS 3.3V-21V/3A  
Output: USB 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W)  
IC solution: with OCP,OVP,ODP,SCP,OTP  
Advantage: 30W discharge the device working temperature  $\leq 45^{\circ}\text{C}$ , 2h full charged by 60W power.



ITC-T6&ITC-P4

20000mAh(6060100\*4)

Specs: PD45W  
Size: 140\*68\*27.7mm



ITC-S6&ITC-D4

20000mAh(6060100\*4)

Specs: PD45W  
Size: 140\*68\*27.7mm



ITC-S6&ITC-D4

20000mAh(6060100\*4)

Specs: PD65W  
Size: 140\*68\*27.7mm



ITC-D5

30000mAh(6060100\*6)

Specs: PD100W  
Size: 140\*68\*39.7mm

#### Specifications

##### PD45W

Material: ABS+rubber oil  
Input: Micro 5V/2A 9V/2A (18W max)  
Input: Type-C 5V/3.0A 9V/2.0A 12V/1.5A 15V/2.66A 20V/2A(40W max)  
Output: Type-C 5V/3.0A 9V/3A 12V/3A 15V/3A 20V/2.25A(45W max)  
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W max)  
IC solution: with OCP,OVP,ODP,SCP,OTP  
Advantage: 30W discharge the device working temperature  $\leq 45^{\circ}\text{C}$ ,3h full charged by 40W power.

#### Specifications

##### PD45W

Material: ABS+rubber oil  
Input: Micro 5V/2A 9V/2A (18W max)  
Input: Type-C 5V/3.0A 9V/2.0A 12V/1.5A 15V/2.66A 20V/2A(40W max)  
Output: Type-C 5V/3.0A 9V/3A 12V/3A 15V/3A 20V/2.25A(45W max)  
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W max)  
IC solution: with OCP,OVP,ODP,SCP,OTP  
Advantage: 30W discharge the device working temperature  $\leq 45^{\circ}\text{C}$ ,3h full charged by 40W power.

#### Specifications

##### PD65W

Material: ABS+rubber oil  
Input: Micro 5V/2A 9V/2A 12V/1.5A(18W)  
Input: Type-C 5V 3A 9V 3A 12V 3A 15V 3A 20V 3A(60W)  
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W max)  
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W)  
IC solution: with OCP,OVP,ODP,SCP,OTP  
Advantage: 30W discharge the device working temperature  $\leq 45^{\circ}\text{C}$ ,2h full charged by 60W power.

#### Specifications

##### PD100W

Material: ABS+rubber oil  
Input: Type-C1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W)  
Output: Type-C1 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A(100W max)PPS 3.3V-21V/3A  
Output: Type-C2 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A(100W max)PPS 3.3V-21V/3A  
Output: USB 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W)  
IC solution: with OCP,OVP,ODP,SCP,OTP  
Advantage: 30W discharge the device working temperature  $\leq 45^{\circ}\text{C}$ ,2h full charged by 60W power.



ITC-U01

3000/4000/4500/5000mAh(21700\*1)

Specs: 2A  
Size: 82.8\*41\*25mm



ITC-U02

6000/8000/9000/10000mAh(21700\*2)

Specs: 2A/PD22.5W  
Size: 82.8\*61.8\*25mm



ITC-CP01

4500mAh/5000mAh(21700\*1)

Specs: 2A  
Size: 79\*46\*27mm



ITC-CP02

4500mAh/5000mAh(21700\*1)

Specs: 2A  
Size: 79\*46\*27mm



ITC-CP03

4500mAh/5000mAh(21700\*1)

Specs: 2A  
Size: 79\*46\*27mm



ITC-CP04

4500mAh/5000mAh(21700\*1)

Specs: 2A  
Size: 80\*46\*27mm

Specifications

2A

Material: ABS  
Input: Type-C 5V/2A  
Output: USB 5V/2A  
Output: Built-in Type-C cable 5V/2A

Specifications

2A

Material: ABS  
Input: Type-C 5V/2A  
Output: Type-C 5V/2A  
Output: USB 5V/2A  
Output: Built-in Type-C cable 5V/2A

Specifications

PD22.5W

Material: ABS  
Input: Type-C 5V/2A 9V/2A 12V/1.5A 18W Max  
Output: TYPE-C 5V/3A 9V/2.22A 12V/1.65A 20W Max  
Output: USB 5V/3A 10V/2.25A 9V/2.22A 12V/1.65A 22.5W Max  
Input: Built-in Type-C cable 5V/2.5A 9V/2A 12V/1.5A 18W Max  
Output: Built-in Type-C cable 5V/3A 9V/2.22A 12V/1.65A 20W Max

Specifications

2A

Material: ABS  
Input: Type-C port 5V/2A  
Output: Built-In Lightning or USB C Connector 5V/2A  
Output: built-in Lightning or USB C cable 5V/2A

Specifications

2A

Material: ABS  
Input: Type-C port 5V/2A  
Output: Built-In Lightning or USB C Connector 5V/2A  
Output: built-in Lightning or USB C cable 5V/2A

Specifications

2A

Material: ABS  
Input: Type-C port 5V/2A  
Output: Built-In Lightning or USB C Connector 5V/2A  
Output: built-in Lightning or USB C cable 5V/2A

Specifications

2A

Material: ABS  
Input: Type-C port 5V/2A  
Output: Built-In Lightning or USB C Connector 5V/2A  
Output: built-in Lightning or USB C cable 5V/2A



ITC-Q01  
10000mAh(954390\*2)  
Specs: 2A/PD22.5W  
Size: 118\*49.6\*22.5mm



ITC-Q02  
10000mAh(954390\*2)  
Specs: 2A/PD22.5W  
Size: 112.8\*49.2\*22.5mm



ITC-Q03  
10000mAh(954390\*2)  
Specs: 2A/PD22.5W  
Size: 112.8\*49.2\*22.5mm



ITC-U03  
6000mAh(21700\*2)  
Specs: PD22.5W  
Size: 97\*50.8\*25.7mm



ITC-U03  
8000mAh(21700\*2)  
Specs: PD22.5W  
Size: 97\*50.8\*25.7mm



ITC-U03  
9000mAh(21700\*2)  
Specs: PD22.5W  
Size: 97\*50.8\*25.7mm



ITC-U03  
10000mAh(21700\*2)  
Specs: PD22.5W  
Size: 97\*50.8\*25.7mm



ITC-U03  
10000mAh(21700\*2)  
Specs: PD22.5W  
Size: 97\*50.8\*25.7mm

## Specifications

2A

Material: ABS  
Input: Type-C 5V/2A  
Output: USB 5V/2A

## Specifications

2A

Material: ABS  
Input: Type-C 5V/2A  
Output: Type-C 5V/2A  
Output: USB 5V/2A

## Specifications

PD22.5W

Material: ABS  
Input: Type-C 5V/3A 9V/2A  
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A  
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.67A

## Specifications

PD22.5W

Material: ABS  
Input: Type-C 5V/2.4A 9V/2A 12V/1.5A  
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

# POWER BANK WITH USB-C&USB-A



**ITC-T2300P**  
5000mAh(115570\*1)  
Specs: 2A/PD22.5W  
Size: 104.6\*63.3\*14.5mm



**ITC-T2310P**  
10000mAh(1260110\*1)  
Specs: 2A/PD22.5W  
Size: 142.6\*68.5\*15.4mm



**ITC-T2311P**  
20000mAh(1260110\*2)  
Specs: 2A/PD22.5W  
Size: 143\*69.7\*28.3mm



**ITC-T2308**  
10000mAh(1260110\*1)  
Specs: 2A/PD22.5W  
Size: 141.6\*68.4\*15.4mm



**ITC-T2309**  
20000mAh(1260110\*2)  
Specs: 2A/PD22.5W  
Size: 145.5\*69.4\*27.6mm



**ITC-Y02**  
5000mAh  
Specs: 2A  
Size: 99\*63\*15mm



**ITC-Y02-2**  
10000mAh  
Specs: 2A/PD20W/PD22.5W  
Size: 100\*63\*27mm



**ITC-Y02-4**  
10000mAh  
Specs: 2A/PD20W/PD22.5W  
Size: 142\*70\*17mm



**ITC-Y02-6**  
20000mAh  
Specs: 2A/PD20W/PD22.5W  
Size: 142\*70\*29mm



**ITC-Y02-8**  
10000mAh  
Specs: 2A/PD20W/PD22.5W  
Size: 82\*82\*27mm



**ITC-Y02-1**  
5000mAh  
Specs: 2A  
Size: 99\*63\*15mm



**ITC-Y02-3**  
10000mAh  
Specs: 2A/PD20W/PD22.5W  
Size: 100\*63\*27mm



**ITC-Y02-5**  
10000mAh  
Specs: 2A/PD20W/PD22.5W  
Size: 142\*70\*17mm



**ITC-Y02-7**  
20000mAh  
Specs: 2A/PD20W/PD22.5W  
Size: 142\*70\*29mm



**ITC-Y02-9**  
10000mAh  
Specs: 2A/PD20W/PD22.5W  
Size: 82\*82\*27mm

## Specifications

2A

Material: ABS  
Input: Type-C 5V/2A  
Output: USB1&2, 5V/2A

PD22.5W

Material: ABS  
Input: Type-C 5V/2.4A 9V/2A 12V/1.5A  
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1&2, 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

## Specifications

2A

Material: ABS  
Input: Type-C 5V/2A  
Output: USB 5V/2A

PD22.5W

Material: ABS  
Input: Type-C 5V/2.4A 9V/2A 12V/1.5A  
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

## Specifications

2A

Material: ABS+PU  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

2A

Material: ABS+PU  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

PD20W

Material: ABS+PU  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB 5V/3A 9V/2A 12V/1.5A

## Specifications

PD22.5W

Material: ABS+PU  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A



ITC-C13  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 105\*60\*22mm



ITC-C15  
20000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 141\*72\*22mm



ITC-C18A  
20000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 156\*80\*22mm



ITC-C18B  
20000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 156\*80\*22mm



ITC-G05  
4500mAh/5000mAh(21700\*1)

Specs: 2A  
Size: 105\*27\*30mm



ITC-G03  
4500mAh/5000mAh(21700\*1)

Specs: 2A  
Size: 127.9\*30mm



ITC-C48  
10000mAh(954292\*1)

Specs: PD22.5W  
Size: 133\*50\*22mm



ITC-G02  
10000mAh(21700\*2)

Specs: PD30W  
Size: 116\*51\*24mm

## Specifications

2A

Material: Aluminum alloy  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

2A

Material: Aluminum alloy  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

PD20W

Material: Aluminum alloy  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB 5V/3A 9V/2A 12V/1.5A

## Specifications

PD22.5W

Material: Aluminum alloy  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

## Specifications

2A

Material: ABS+Torch  
Input: TYPE-C 5V/2A  
Output: USB A 5V/2A  
Output: Built-in Type-C 20cm cable 2A

## Specifications

2A

Material: Aluminum alloy+Torch  
Input: TYPE-C 5V/2A  
Output: USB A 5V/2A

## Specifications

PD22.5W

Material: Aluminum alloy  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

## Specifications

PD30W

Material: Aluminum alloy  
Input: Type-C 1.5V/3A 9V/2A 12V/1.67A 15V/2A 20V/1.5A (30W)  
Input: Type-C2 5V/3A 9V/2A 12V/1.67A 15V/2A 20V/1.5A (30W)  
Output: Type-C2 5V/3A 9V/3A 9V/2.22A 12V/2.5A 15V/2A 20V/1.5A (30W)  
PPS: 3.3-11V/3A, 3-16V/2A (32W)  
Output: USB A 5V/3A 9V/2A 12V/1.5A (18W)  
Output: Total USB A +USB C share 3A

# Ultra-High Capacity Power Bank Super Fast Charging

Capacity 30000mAh-60000mAh

20W/65W fully compatible  
Compatible for PD,FCP,QC,AFC etc.



## HIGH-CAPACITY POWER BANK



ITC-T2401

30000mAh(21700\*6)

Specs: PD20W/65W  
Size: 169\*74.2\*49.9mm



ITC-T2340

40000mAh(1260110\*4)

Specs: PD20W/65W  
Size: 197\*73.7\*54mm



ITC-T2347

50000mAh(1260110\*5)

Specs: PD20W/65W  
Size: 197\*76.5\*66mm



ITC-T2348

60000mAh(1260110\*6)

Specs: PD20W/65W  
Size: 197\*76.5\*78mm

### Specifications

PD20W

Material: ABS  
Input: TYPE-C 5V/3A 9V/2A  
Output: TYPE-C 5V/3A 9V/2.22A 12V/1.65A  
Output: USB1 5V/3A 9V/2.22A 12V/1.65A 10V/2A  
Output: USB1 5V/3A 9V/2.22A 12V/1.65A 10V/2A

### Specifications

PD65W

Material: ABS  
Input: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A(60W Max)  
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W Max)  
Output: USB1/2 4.5V/5A 5V/4.5A 9V/2.22A 12V/1.67A(22.5W Max)

## FRUIT POWER BANK



ITC-C21

3600MAH/2000MAH

Specs: 1A  
Size: 72\*76\*24mm



ITC-R13

10000mAh

Specs: 2A  
Size: 109\*74\*20mm



ITC-R13

6000mAh(104060\*2)

Specs: 2A  
Size: 82.6\*73\*32mm



ITC-R14

10000mAh(955465\*2)

Specs: 2A  
Size: 103\*68\*27mm

### Specifications

1A

Material: ABS+PC+UV+Color Printing  
Input: MICRO 5V/1A  
Output: USBA 5V/1A

### Specifications

2A

Material: ABS+PC+UV+Color Printing  
Input: MICRO 5V/2A  
Output: USBA 5V/2A

### Specifications

2A

Material: ABS+PC(fireproof)+Aluminum +Rubber  
Input: TYPE-C 5V/2A  
Output: USB 5V/2A  
Heating temperature: 52°C

### Specifications

2A

Material: ABS+PC(fireproof)+Aluminum +Rubber  
Input: TYPE-C 5V/2A  
Output: USB 5V/2A  
Heating temperature: 52°C



ITC-W01  
WIRELESS CHARGER

Specs: 15W  
Size: 99\*9mm



ITC-W03  
WIRELESS CHARGER

Specs: 15W  
Size: 99\*9mm



ITC-W04  
WIRELESS CHARGER

Specs: 15W  
Size: 99\*96\*10mm



ITC-W02  
WIRELESS CHARGER

Specs: 15W  
Size: 89\*10mm



ITC-W05  
WIRELESS CHARGER

Specs: 15W  
Size: 89\*10mm



ITC-W06  
WIRELESS CHARGER

Specs: 15W  
Size: 89\*10mm



ITC-W07  
WIRELESS CHARGER

Specs: 15W  
Size: 90\*10mm

Specifications

15W

Material: ABS+non-slip silicone  
Output: Wireless 15W/10W/7.5W/5W  
Input: TYPE-C 9V/1.67A 9V/2A

Specifications

15W

Material: ABS+non-slip silicone  
Output: Wireless 15W/10W/7.5W/5W  
Input: TYPE-C 9V/1.67A 9V/2A



**ITC-C33**

10000mAh(9065113\*1)

Specs: PD22.5W+15W  
Size: Power bank:150\*72\*11mm  
Charging dock:142\*85\*24mm

**Specifications**

**PD22.5W+15W**

Detachable Power bank with wireless charge(PD22.5+15W)  
Material: ABS +silicone  
Input: TYPE-C 5V/2.5A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2.22A 12V/1.67A (PD20W)  
Output: USB 5V/4.5A 9V/2A 12V/1.5A (PD22.5W)  
Wireless charging: 5W/7.5W/10W/15W  
Frequency: 110-220kHz

Wireless Dock(15W)  
Input: TYPE-C 5V/3A 9V/3A  
Output: USB 5V/2A  
Wireless charging: 5W/7.5W/10W/15W  
Frequency: 110-220kHz



**ITC-SZ06**


5-in-1 Wireless Charger With Alarm Clock

Specs: 15W+3W  
Size: 139\*70\*13.5mm

**Specifications**

**15W+3W**

Material: ABS+Silicone+metal  
Input: TYPE-C DCSV/2A 9V/2A  
Output: Wireless charging 5W/7.5W/10W/15W max  
Charging Efficiency: ≥73%  
Working Frequency range: 110-205KHz  
Output: Wireless charging (Headphone) 3W max  
Charing Distance: ≤6mm  
Charging Standard: Compatible with WPC Qi V1.2.4

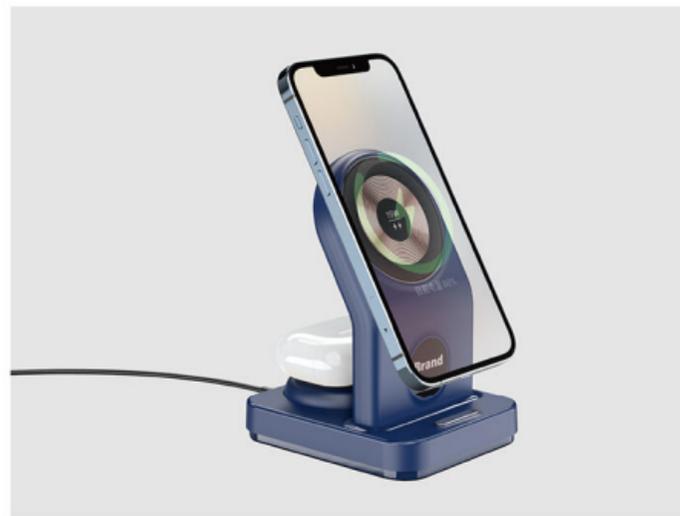

**ITC-SZ10**

3-in-1 Magnetic Wireless Charger

Specs: 15W+3W  
Size: 125\*102\*83.5mm

**Specifications**

**15W+3W**

Material: ABS+Silicone  
Input: TYPE-C DCSV/2A 9V/2A  
Output: Wireless charging 5W/7.5W/10W/15W max  
Charging Efficiency: ≥73%  
Working Frequency range: 110-205KHz  
Output: Wireless charging (Headphone) 3W max  
Charing Distance: ≤6mm  
Charging Standard: Compatible with WPC Qi V1.2.4



**ITC-SZ08(Round)&ITC-SZ09(Square)**

2-in-1 Wireless Charger

Specs: 15W+3W+3W  
Size: 65\*21mm

**Specifications**

**15W+3W+3W**

Material: ABS  
Input: TYPE-C DCSV/2A 9V/2A  
Output: Wireless charging 5W/7.5W/10W/15W max  
Charging Efficiency: ≥73%  
Working Frequency range: 110-205KHz  
Output: Wireless charging (Headphone) 3W max  
Output: Wireless charging (Watch) 3W max  
Charing Distance: ≤6mm  
Charging Standard: Compatible with WPC Qi V1.2.4



ITC-SZ01

Alarm clock Wireless Charger

Specs: 15W  
Size: 110\*80\*75mm



ITC-SZ04

5-in-1 Magnetic Wireless Charger

Specs: 15W+3W+2W  
Size: 117.6\*112.6\*83.8mm



ITC-SZ02

Alarm Clock Wireless Charger

Specs: 15W  
Size: 168\*116.5\*116.5mm



ITC-SZ03

Alarm Clock Wireless Charger

Specs: 15W  
Size: 187\*130\*42mm

Parameters: Material: ABS+Silicone  
Charging power: 15W  
Charging distance: ≤6mm  
Charging Efficiency: 75%  
USB: Type C  
Charging Standard: Qi

Features: Time display: 12H/24H Optional  
Years: 2000-2099  
Temperature display: Mini: -50°C Max: 97°C  
Alarm Clock: 3 sets of alarm clock Settings  
15W Wireless Charging Pad

Parameters: Material: ABS+Silicone  
Input: Type-C DC5V/2A , 9V/1.67A  
Output: Wireless charging 5W/7.5W/10W/15W  
Working Frequency range: 110-205KHz  
Output: Wireless charging (AirPods) 3W  
Output: Wireless charging (Apple watch) 2W  
Charing Distance: ≤6mm  
Charging Efficiency: ≥ 73%  
Charging Standard: Compatible with WPC Qi V1.2.4

Features: Time display: 12/24H optional  
Alarm clock: Set two alarm  
Backlight LOGO  
Magnetic Wireless charge: 15W max.  
Table Lamp(High light & low light for option)

Parameters: Material:ABS  
Input Type C: 5V/2A,9V/1.67A  
Output Wireless: 5W/7.5W/10W/15W  
Charing Distance: ≤6mm  
Charging Efficiency: 75%  
Charging Standard: Qi

Features: Time display: 12/24H optional  
Date display: Month and date  
Alarm clock: Set two alarm  
Temperature display: Degrees Celsius or Fahrenheit (C°/F°)  
Wireless charge: 15W max.

Parameters: Material: ABS+Silicone  
Input Type-C: 5V/2A, 9V/2A,12V/1.25A  
Output Wireless: 5W/7.5W/10W/15W  
Output USB 1/2: 5V/2.4A each  
Output USB 1+USB2: 5V/3A share  
Charing Distance: ≤6mm  
Charging Efficiency: 75%  
Charging Standard: Compatible with WPC Qi V1.2.4

Features: Time display: 12/24H optional  
Date display: Month and date  
Alarm clock: Set two alarm  
Temperature display: Degrees Celsius or Fahrenheit (C°/F°)  
Wireless charge: 15W max.



ITC-SL900

16000mAh(7565121\*2)

Specs: PD22.5W+15W(Wireless)  
Size: 161\*83\*32mm



ITC-SL807

20000mAh(1260110\*2)

Specs: PD22.5W+15W(Wireless)  
Size: 172\*87\*26mm



ITC-SL902

20000mAh(8870129\*2)

Specs: PD22.5W+15W(Wireless)  
Size: 178\*93\*30mm



ITC-SL804

30000mAh(8870129\*3)

Specs: PD22.5W+15W(Wireless)  
Size: 186\*77\*33mm



ITC-SL805

10000mAh(1260110\*1)

Specs: PD22.5W+15W(Wireless)  
Size: 168\*77\*22mm



ITC-SL190

10000mAh(1260110\*1)

Specs: PD22.5W  
Size: 158\*78\*25mm

## Specifications

## PD22.5W+15W

Material: ABS + Silicone  
Solar Panel: 5.5V/1100mA(3 solar panel)  
Type-C Input: DC 5V/3A 9V/2.22A(Max)  
Type-C Output: DC 5V/3A 9V/2.2A 12V/1.67A(Max)  
USB Output 1/2: DC 5V/4.5A 5V/3A 9V/2A 12V/1.5A (Max)  
Wireless Output: 5W/7.5W/10W/15W(Full Compatible, optional)

## Specifications

## PD22.5W+15W

Material: ABS + Silicone  
Solar Panel: 5.5V/220mA  
Micro USB input: DC 5V/2.4A 9V/2A(Max)  
Type-C Input: DC 5V/3A 9V/2.22A(Max)  
Type-C Output: DC 5V/3A 9V/2.2A 12V/1.67A(Max)  
USB Output 1/2: DC 5V/4.5A 5V/3A 9V/2A 12V/1.5A (Max)  
Wireless Output: 5W/7.5W/10W/15W(Full Compatible)

## Specifications

## PD22.5W+15W

Material: ABS + Silicone  
Solar Panel: 5.5V/350mA  
Micro USB input: DC 5V/2.4A 9V/2A(Max)  
Type-C Input: DC 5V/3A 9V/2.22A(Max)  
Type-C Output: DC 5V/3A 9V/2.2A 12V/1.67A(Max)  
USB Output: DC 5V/4.5A 5V/3A 9V/2A 12V/1.5A (Max)  
Built-in-cable Input: USB support 18W  
Built-in-cable Output: Type-C support PD20W,  
Micro and lightning support 10W  
Wireless Output: 5W/7.5W/10W/15W(Full Compatible)

## Specifications

## PD22.5W+15W

Material: ABS + TPU  
Solar panel: Monocrystalline silicon 5.5V/200mA  
Input: Micro: 5V/3.5A 9V/2A  
Input: Type-C: 5V/3.5A 9V/2A 12V/1.5A  
Output: USB1 5V/4.5A 5V/3.5A 9V/2A 12V/1.5A ; USB 2/3/4: 5W/2A  
Output: Type-c: 5V/3.5A 9V/2A 12V/1.5A  
Wireless Output: 5W/7.5W/10W/15W(Full Compatible)

## Specifications

## PD22.5W+15W

Material: ABS + Silicone  
Solar panel: Monocrystalline silicon 5.5V/200mA  
Micro USB input: DC 5V/2.4A 9V/2A(Max)  
Type-C Input: DC 5V/3A 9V/2.22A(Max)  
Type-C Output: DC 5V/3A 9V/2.2A 12V/1.67A(Max)  
USB Output: DC 5V/4.5A 5V/3A 9V/2A 12V/1.5A (Max)  
Built-in-cable Output: Type-C support PD20W,  
Micro and lightning support 10W  
Wireless Output: 5W/7.5W/10W/15W(Full Compatible)

## Specifications

## PD22.5W

Material: ABS + Silicone  
Solar Panel: 5.5V/220mA  
Type-C Input: DC 5V/3A 9V/2.22A(Max)  
Type-C Output: DC 5V/3A 9V/2.2A 12V/1.67A(Max)  
USB Output 1/2: DC 5V/4.5A 5V/3A 9V/2A 12V/1.5A (Max)

# PD100W SUPER FAST CHARGING POWER BANK

Best choice for your Laptop



ITC-PD02

10000mAh(18650\*4)

Specs: PD100W  
Size: 147\*45\*34mm



ITC-PD01

10000mAh(18650\*4)

Specs: PD100W  
Size: 147\*45\*34mm

## Specifications

PD100W

Material: ABS  
Input:TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A 20V/5.0A (100W Max)  
Output:TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A 20V/5.0A 3.3~21V/5A PPS (100W Max)  
Input:Built-in TYPE-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A 20V/5.0A (100W Max)  
Output:Built-in TYPE-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A 20V/5.0A 3.3~21V/5A PPS (100W Max)  
Output:USB port 5.0V/3.0A 9V/2.22A 10V/2.25A 12V/1.67A (22.5W Max)

## Specifications

PD100W

Material: ABS  
Input:TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A 20V/5.0A (100W Max)  
Output:TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A 20V/5.0A 3.3~21V/5A PPS (100W Max)  
Output:USB port 5.0V/3.0A 9V/2.22A 10V/2.25A 12V/1.67A (22.5W Max)