



ITC

Make Life Easier

Shenzhen ITC Technology Co.,Ltd

Shenzhen ITC Technology Co.,Ltd


Email:info@itc-a.com

Call:86-755-2335-4846

Web:www.itc-a.com

Add:1-3F, No. 52, Ditang Road, Sha San Community, Shajing Street, Bao'an District, Shenzhen,China518104



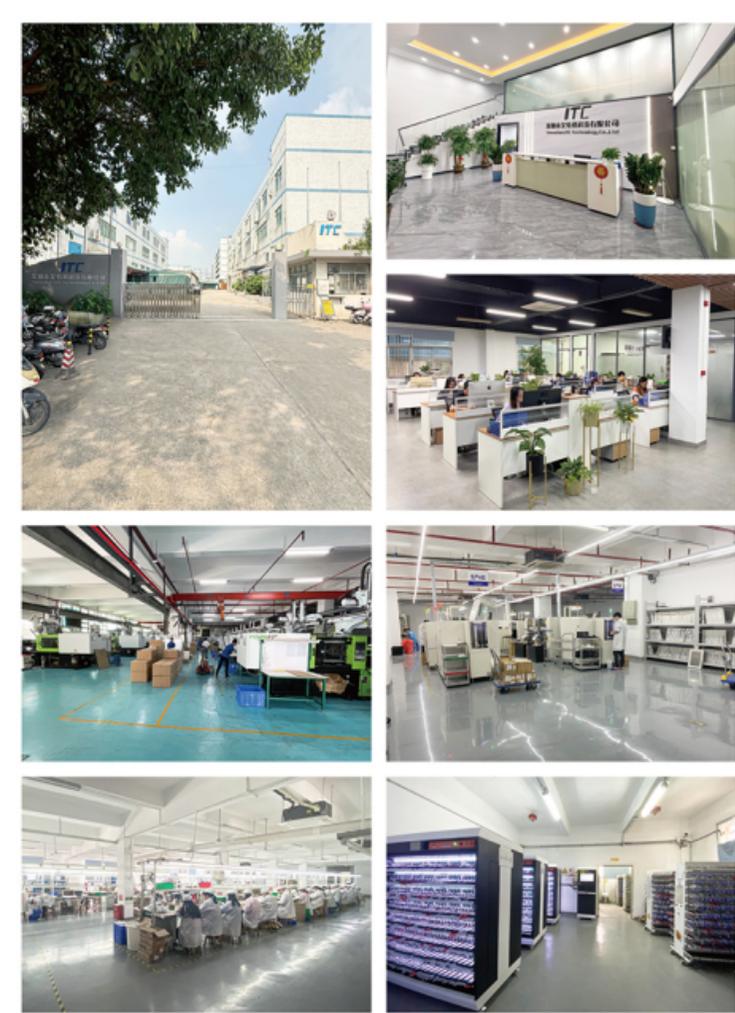

ABOUT COMPANY

Shenzhen ITC Technology Co., Ltd. was established in 2007 and is located in Shenzhen, China. It is a high-tech enterprise that integrates research and development, production, and sales. The company's main products include power banks, wireless chargers, car chargers, car-mounted wireless chargers, Bluetooth speakers, and other computer and mobile phone peripheral accessories. In the future, the company plans to expand its product range to include fast charging, outdoor energy storage, and new energy products. Our development goal is to become an expert in the new generation of mobile power banks.

With 16 years of experience in R&D, production, and export, we have become one of the most professional and competitive manufacturers. Our customers come from all over the world, including the US, Europe, Middle East, Southeast Asia etc. They include companies in promotion, agency, branding, supermarkets, and chain stores such as Walmart, Timberland, Nautica, Kooba, Steve Madden, Mont Blanc, JMC, Costco, and Greenhouse etc.

ITC has a 2,000 square meter SMT workshop with two advanced Japanese SMT machines, a 8,000 square meter injection and assembly workshop with over 300 workers, 12 sets of mold machines, 8 sets of injection machines, and 16 assembly production lines that ensure a daily capacity of approximately 50,000 units. Additionally, 20 sets of full-auto aging equipment can perform aging tests of 10,000 finished products simultaneously.

Our strong R&D team of around 15 employees covers senior design engineers, senior hardware and software engineers, testing engineers, and other technical members who enhance our technology strength. Our R&D team never stops innovating and creating. We develop more than 200 models and 5-6 new private molds each month.

ITC has passed audits by ISO9001, BSCI, and AF, and all products produced by ITC are in line with international certifications such as CE, FCC, RoHS, PSE, UL, CNS, KC, CB, and Qi. All incoming materials undergo rigorous inspection before production and assembling, while finished products undergo professional aging tests. With rich experience in this field, we are dedicated to providing high-quality products and excellent design solutions to all our customers.

"Growing together with our customers" is our operating philosophy. We always prioritize the benefits of our customers and strive to achieve development and profitability through quality optimization. We firmly believe that the quality we provide today lays the foundation for tomorrow's success in the market.

QUALITY CERTIFICATE



CONTENTS

SUPER SLIM POWER BANK	02-06	20	CAPSUAL POWER BANK
POWER BANK	07-08&25-28	21-24&33-34	PD30W-140W POWER BANK
POWER BANK WITH LED BACKLIGHT	09-10	29	FRUIT POWER BANK
POWER BANK WITH MAGNETIC WIRELESS	11-15	30	POWER BANK WITH LEATHER TEXTURE
POWER BANK WITH BUILT-IN CABLE	16-18	31-32	TWS EARBUDS
TFT COLOR DIGITAL DISPLAY POWER BANK	19		

2024 SUPER SLIM SERIES

Slimmest size
only 0.39 inch thick



5000
mAh

10000
mAh

20000
mAh



ITC-N01S/M01S

5000mAh(706074)

Specs: 2A/PD20W/PD22.5W
Size: 103.8*68*10mm

ITC-N02/M02

10000mAh(146074)

Specs: 2A/PD20W/PD22.5W
Size: 103.8*68*17mm

ITC-N01/M01

5000mAh(6458102)

Specs: 2A/PD20W/PD22.5W
Size: 131.8*66.2*10.5mm

ITC-N03/M03

10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W
Size: 131.8*66.2*13.2mm

ITC-N04/M04

20000mAh(9858102*2)

Specs: 2A/PD20W/PD22.5W
Size: 131.8*66.2*23mm

ITC-NL01/ML01

5000mAh(6458102)

Specs: 2A/PD20W/PD22.5W
Size: 130.5*62.5*8.8mm

ITC-NL03/ML03

10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W
Size: 130.5*62.5*12.2mm

ITC-NL04/ML04

20000mAh(9858102*2)

Specs: 2A/PD20W/PD22.5W
Size: 130.5*62.5*22mm

Specifications

2A

Material: ABS
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Material: ABS
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A



IITC-NS01/MS01
5000mAh(606280)

Specs: 2A/PD20W/PD22.5W
Size: 108.5*66.5*8.8mm



IITC-MS01-M
5000mAh(536280)

Specs: 2A+5W/PD20W+15W
Size: 108.5*66.5*8.8mm



IITC-NS03/MS03
10000mAh(126280)

Specs: 2A/PD20W/PD22.5W
Size: 108.5*66.5*14.8mm



IITC-MS03-M
10000mAh(126280)

Specs: 2A+5W/PD20W+15W
Size: 108.5*66.5*15.8mm



IITC-NS04/MS04
20000mAh(126280*2)

Specs: 2A/PD20W/PD22.5W
Size: 108.5*66.5*26.8mm



IITC-NX01/MX01
5000mAh(706074)

Specs: 2A/PD20W/PD22.5W
Size: 102.5*64.5*9.8mm



IITC-MX01-M
5000mAh(606074)

Specs: 2A+5W/PD20W+15W
Size: 102.5*64.5*9.8mm



IITC-NX03/MX03
10000mAh(1376074)

Specs: 2A/PD20W/PD22.5W
Size: 102.5*64.5*16.5mm



IITC-MX03-M
10000mAh(1376074)

Specs: 2A+5W/PD20W+15W
Size: 102.5*64.5*17.5mm



IITC-NX04/MX04
20000mAh(1376074*2)

Specs: 2A/PD20W/PD22.5W
Size: 102.5*64.5*30.2mm

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

PD20W+15W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A
Output: Magnetic Wireless 15W/10W/7.5W/5W

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

PD20W+15W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A
Output: Magnetic Wireless 15W/10W/7.5W/5W



ITC-D01
5000mAh

Specs: 2A
Size: 100*63.8*15.8mm



ITC-D02
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 100*63.8*26.8mm



ITC-D03
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*17.5mm



ITC-D04
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*28mm



ITC-D05
30000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*40mm



ITC-S1
5000mAh

Specs: 2A
Size: 100*63.3*13.5mm



ITC-S2
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 100*63.3*23mm



ITC-S3
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 152*73.3*14.5mm



ITC-S4
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 152*73.3*23.8mm



ITC-S5
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.44*15.7mm



ITC-S6
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.44*27.7mm



ITC-P01
5000mAh

Specs: 2A
Size: 100*63.8*15.8mm



ITC-P02
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 100*63.8*26.8mm



ITC-P03
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*17.5mm



ITC-P04
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*28mm



ITC-P05
30000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*40mm



ITC-T1
5000mAh

Specs: 2A
Size: 100*63.3*13.5mm



ITC-T2
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 100*63.3*23mm



ITC-T3
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 152*73.3*14.5mm



ITC-T4
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 152*73.3*23.8mm



ITC-T5
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.44*15.7mm



ITC-T6
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.44*27.7mm

Specifications

2A

Material: ABS
Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Material: ABS
Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS
Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS
Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A

Material: ABS
Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Material: ABS
Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS
Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS
Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A



ITC-ML01
5000mAh(6458102)

Specs: 2A+Backlight
Size: 130.5*62.5*8.8mm



ITC-ML03
10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W+Backlight
Size: 130.5*62.5*12.2mm



ITC-NL01
5000mAh(6458102)

Specs: 2A+Backlight
Size: 130.5*62.5*8.8mm



ITC-NL03
10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W+Backlight
Size: 130.5*62.5*12.2mm



ITC-P01/D01
5000mAh

Specs: 2A/PD20W/PD22.5W+Backlight
Size: 100*63.8*15.8mm



ITC-P02/D02
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight
Size: 100*63.8*26.8mm



ITC-P03/D03
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight
Size: 140*68.8*17.5mm



ITC-T3/S3
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight
Size: 152*73.3*14.5mm

Specifications

2A+Backlight

Material: ABS(front)+Aluminum alloy(Back)+PC
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Backlight: LOGO

Specifications

2A+Backlight

Material: ABS(front)+Aluminum alloy(Back)+PC
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Backlight: LOGO

Specifications

PD20W+Backlight

Material: ABS(front)+Aluminum alloy(Back)+PC
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/3A 9V/2A 12V/1.5A
Backlight: LOGO

Specifications

PD22.5W+Backlight

Material: ABS(front)+Aluminum alloy(Back)+PC
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Backlight: LOGO

Specifications

2A+Backlight

Material: ABS+PC
Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Backlight: LOGO

Specifications

2A+Backlight

Material: ABS+PC
Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Backlight: LOGO

Specifications

PD20W+Backlight

Material: ABS+PC
Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/3A 9V/2A 12V/1.5A
Backlight: LOGO

Specifications

PD22.5W+Backlight

Material: ABS+PC
Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Backlight: LOGO

Magnetic Wireless Power Bank 5k/10kmAh

Slim and Compact



Stronger Magnetic Connection



MS03-M
10000mAh



MS01-M
5000mAh

POWER BANK WITH MAGNETIC WIRELESS



ITC-S1-M
5000mAh(955465*1)

Specs: 2A+5W/PD20W+15W(Magnetic)
Size: 100*63.3*14.82mm



ITC-S2-M
10000mAh(955465*2)

Specs: 2A+5W/PD20W+15W(Magnetic)
Size: 100*63.3*24.82mm



ITC-S8-M
5000mAh(706074*1)

Specs: 2A+5W/PD20W+15W(Magnetic)
Size: 105.2*67.8*13.9mm



ITC-S9-M
10000mAh(1376074*1)

Specs: 2A+5W/PD20W+15W(Magnetic)
Size: 105.2*67.8*20mm

Specifications

2A+5W

Material: ABS
Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A
Output: Magnetic Wireless 5W

Specifications

PD20W+15W

Material: ABS
Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1&2, 5V/3A 9V/2A 12V/1.5A
Output: Magnetic Wireless 15W/10W/7.5W/5W

Specifications

2A+5W

Material: ABS+PU
Input: TYPE-C 5V/2A
Output: USB 5V/2A
Output: Magnetic Wireless 5W

Specifications

PD20W+15W

Material: ABS+PU
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A
Output: Magnetic Wireless 15W/10W/7.5W/5W



ITC-LM01

5000mAh(706074*1)

Specs: PD20W+15W(Magnetic)
Size: 102.4*66.2*11.5mm

ITC-LM04

5000mAh(546280*1)

Specs: PD20W+15W(Magnetic)
Size: 106.8*69.4*9.5mm

ITC-LM02

5000mAh(955465*1)

Specs: PD22.5W+15W(Magnetic)
Size: 98.5*62.9*14.6mm

ITC-LM03

10000mAh(1376074*1)

Specs: PD22.5W+15W(Magnetic)
Size: 101.7*67.7*19.9mm

ITC-T2413-1

9000mAh(105555*1)

Specs: PD20W+15W(Magnetic)
Size: 85*62.5*15.1mm

ITC-T2413-2

5000mAh(105555*1)

Specs: PD20W+15W(Magnetic)
Size: 85*62.5*15.1mm

ITC-T2419

5000mAh(105555*1)

Specs: PD20W+15W(Magnetic)
Size: 106*70*11.3mm

ITC-T2420

5000mAh(105555*1)

Specs: PD20W+15W(Magnetic)
Size: 108.4*70.1*10.5mm

ITC-T2421

5000mAh(955465*1)

Specs: PD22.5W+15W(Magnetic)
Size: 98*62.7*16.7mm

Specifications

PD20W+15W

Material: Aluminum alloy
Input: Type-C 5V/3A 9V/2A
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A
Output: Magnetic Wireless 9V/1.5A(15W)

Specifications

PD20W+15W

Material: ABS
Input: Type-C 5V/3A 9V/2A
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A
Output: Magnetic Wireless 15W Max

Specifications

PD22.5W+15W

Material: ABS
Input: Type-C 5V/3A 9V/2A
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A
Output: USB 5V/3A 9V/2.22A 12V/1.67A 10V/2.25A
Output: Magnetic Wireless 15W Max

Specifications

PD22.5W+15W

Material: ABS
Input: Type-C 5V/3A 9V/2A
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A
Output: USB 5V/3A 9V/2.22A 12V/1.67A 10V/2.25A
Output: Magnetic Wireless 15W Max

Specifications

PD20W+15W

Material: ABS
Input: Type-C 5V/3A 9V/2A
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A
Output: Magnetic Wireless 15W(Max)

Specifications

PD22.5W+15W

Material: ABS
Input: Type-C 5V/3A 9V/2A
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A
Output: USB 5V/3A 9V/2A 12V/1.5A 10V/2.25A
Output: Magnetic Wireless 15W(Max)



ITC-U04

10000mAh (105555*2)

Specs: PD22.5W(No Magnetic)
Size: 76*66.8*24mm



ITC-LM05

10000mAh (105555*2)

Specs: PD22.5W+15W(Magnetic)
Size: 76*66.8*25.2mm



ITC-LM06

10000mAh (126280*1)

Specs: PD22.5W+15W(Magnetic)
Size: 113*69.8*19.74mm



ITC-T2425

10000mAh(126280*1)

Specs: PD22.5W
Size: 116.3*70.5*15.9mm



ITC-T2426

20000mAh(126280*2)

Specs: PD22.5W
Size: 116.7*70.5*27.7mm



ITC-T2423-1

10000mAh(126280*1)

Specs: PD22.5W
Size: 113.5*69.8*16mm



ITC-T2424-1

20000mAh(126280*2)

Specs: PD22.5W
Size: 113.5*69.8*27.5mm



ITC-T2423-2

10000mAh(126280*1)

Specs: PD22.5W
Size: 113.5*69.8*16mm



ITC-T2424-2

20000mAh(126280*2)

Specs: PD22.5W
Size: 113.5*69.8*27.5mm

Specifications

PD22.5W

Material: ABS
Input: Type-C 5V/3A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A
Output: USB A 5V/3A 9V/2A 10V/2.25A 12V/1.5A
Output: Built-in Type-C cable 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A

Specifications

PD22.5W+15W

Material: ABS
Input: Type-C 5V/3A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A
Output: USB A 5V/3A 9V/2A 10V/2.25A 12V/1.5A
Output: Built-in Type-C cable 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A
Output: Wireless magnetic 15W Max

Specifications

PD22.5W+15W

Material: ABS
Input: Type-C 5V/3A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A
Input: Built-in Type-C cable 5V/3A 9V/2A 12V/1.5A
Output: Built-in Type-C cable 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A
Output: Wireless magnetic 15W Max

Specifications

PD22.5W

Material: ABS
Input: Type-C 5V/3A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A
Output: USB 5V/3A 9V/2A 12V/1.5A 10V/2.25A
Input: Built-in Type-C cable 5V/3A 9V/2A 12V/1.5A
Output: Built-in Type-C cable 5V/3A 9V/2.22A 12V/1.67A

Specifications

PD22.5W

Material: ABS
Input: Type-C 5V/3A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A
Output: USB 1 5V/3A 9V/2A 12V/1.5A 10V/2.25A
Output: USB 2 5V/3A 9V/2A 12V/1.5A 10V/2.25A
Input: Built-in Type-C cable 5V/3A 9V/2A 12V/1.5A
Output: Built-in Type-C cable 5V/3A 9V/2.22A 12V/1.67A



ITC-Q2

10000mAh(21700*2 or 114373*2)

Specs: PD22.5W
Size: 89*62.4*26.7mm

ITC-Q3

10000mAh(21700*2 or 114373*2)

Specs: PD22.5W
Size: 89*62.4*26.7mm

ITC-Q5

10000mAh(21700*2 or 114373*2)

Specs: PD22.5W+15W(Magnetic)
Size: 89*62.4*26.7mm

ITC-Q6

10000mAh(21700*2 or 114373*2)

Specs: PD22.5W
Size: 89*62.4*26.7mm

ITC-Q9-M4

10000mAh(105555*2)

Specs: PD22.5W
Size: 75*66.5*24.5mm

ITC-Q8

5000mAh(21700*1)

Specs: PD22.5W
Size: 78*38*26mm

ITC-Q12-M15

10000mAh(105555*2)

Specs: PD22.5W
Size: 117*66.5*27mm

ITC-Q12-M5

10000mAh(105555*2)

Specs: PD22.5W
Size: 117*66.5*27mm

ITC-Q13-M5

20000mAh(145675*2)

Specs: PD22.5W
Size: 138mm*67mm*35mm

Specifications

PD22.5W

Material: ABS

Input: Type-C 5V/3A 9V/2A 12V/1.5A

Output: Type-C 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A

Output: USB A 5V/3A 9V/2.22A 10V/2.25A 12V/1.5A

Output: Built-in Cable TYPE C: 5V/3A 9V/2.22A 10V/2.25A 12V/1.5A

Output: Built-in Cable Lightning: 5W/2.4A

Specifications

PD22.5W+15W

Material: ABS

Input: Type-C 5V/3A 9V/2A 12V/1.5A

Output: Type-C 5V/3A 9V/2.22A 12V/1.67A SSCP:10V/2.25A

Output: USB A 5V/3A 9V/2.22A 12V/1.5A SSCP:10V/2.25A

Input: Built-in Cable TYPE C: 5V/3A 9V/2A 12V/1.5A

Output: Built-in Cable TYPE C: 5V/3A 9V/2.22A 12V/1.67A SSCP:10V/2.25A

Output: Built-in Cable Lightning: 5V/2.4A

Output: wireless magnetic 15W(Max)

Specifications

PD22.5W

Material: ABS

Input: Type-C 5V/2.9A 9V/2A 12V/1.5A

Output: Type-C 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A

Output: Built-in Cable TYPE C: 5V/3A 9V/2.22A 10V/2.25A 12V/1.5A

Output: Built-in Cable Lightning: 5W/2.4A

Specifications

PD22.5W

Material: ABS

Input: Type-C 5V/3A 9V/2A 12V/1.5A

Output: Type-C 5V/3A 9V/2.22A 12V/1.67A SSCP: 10V/2.25A

Output: USB A 5V/3A 9V/2A 12V/1.5A SSCP: 10V/2.25A

Input: Built-in Cable TYPE C: 5V/3A 9V/2A 12V/1.5A

Output: Built-in Cable TYPE C: 5V/3A 9V/2.22A 12V/1.67A SSCP:10V/2.25A

Output: Built-in Cable Lightning: 5V/2.4A



ITC-U01

3000/4000/4500/5000mAh(21700*1)-2A
4500/5000mAh(21700*1)-PD22.5W

Specs: 2A/PD22.5W
Size: 82.8*41*25mm



ITC-U02

6000/8000/9000/10000mAh
(21700*2 or 104373*2)

Specs: 2A/PD22.5W
Size: 82.8*61.8*25mm



ITC-T2410

10000mAh(21700*2 or 104373*2)

Specs: PD22.5W(TFT display)
Size: 80.3*57.8*25.4mm



ITC-T2411

10000mAh(21700*2 or 104373*2)

Specs: PD22.5W(TFT display)
Size: 117*51.7*26.5mm



ITC-CP01

4500mAh/5000mAh(21700*1)

Specs: 2A
Size: 79*46*27mm



ITC-CP02

4500mAh/5000mAh(21700*1)

Specs: 2A
Size: 79*46*27mm



ITC-CP03

4500mAh/5000mAh(21700*1)

Specs: 2A
Size: 79*46*27mm



ITC-CP04

4500mAh/5000mAh(21700*1)

Specs: 2A
Size: 80*46*27mm

Specifications

2A

Material: ABS
Input: Type-C 5V/2A
Output: USB 5V/2A
Output: Built-in Type-C cable 5V/2A

Specifications

2A

Material: ABS
Input: Type-C 5V/2A
Output: Type-C 5V/2A
Output: USB 5V/2A
Output: Built-in Type-C cable 5V/2A

Specifications

PD22.5W

Material: ABS
Input: Type-C 5V/2A 9V/2A 12V/1.5A 18W Max
Output: TYPE-C 5V/3A 9V/2.22A 12V/1.65A 20W Max
Output: USB 5V/3A 10V/2.25A 9V/2.22A 12V/1.65A 22.5W Max
Input: Built-in Type-C cable 5V/2.5A 9V/2A 12V/1.5A 18W Max
Output: Built-in Type-C cable 5V/3A 9V/2.22A 12V/1.65A 20W Max

Specifications

PD22.5W

Material: ABS
Input: Type-C 5V/3A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A
Output: USB 5V/3A 9V/2.22A 12V/1.67A 10V/2.25A
Input: Type-C built in cable 5V/3A 9V/2A 12V/1.5A(Model T2411)
Output: Type-C built in cable 5V/3A 9V/2.22A 12V/1.67A 10V/2.25A(Model T2411)

Specifications

2A

Material: ABS
Input: Type-C port 5V/2A
Output: Built-in Lightning or USB C Connector 5V/2A
Output: built-in Lightning or USB C cable 5V/2A

Specifications

2A

Material: ABS
Input: Type-C port 5V/2A
Output: Built-in Lightning or USB C Connector 5V/2A
Output: built-in Lightning or USB C cable 5V/2A

Specifications

2A

Material: ABS
Input: Type-C port 5V/2A
Output: Built-in Lightning or USB C Connector 5V/2A
Output: built-in Lightning or USB C cable 5V/2A

Specifications

2A

Material: ABS
Input: Type-C port 5V/2A
Output: Built-in Lightning or USB C Connector 5V/2A
Output: built-in Lightning or USB C cable 5V/2A



ITC-C01

9600mAh/10000mAh(18650*3)

Specs: PD30W
Size: 100*62.5*22.5mm



ITC-C01

9600mAh/10000mAh(18650*3)

Specs: PD45W
Size: 100*62.5*22.5mm



ITC-T2411

10000mAh(21700*2)

Specs: PD35W
Size: 117*51.7*26.5mm



ITC-T6&ITC-P4

20000mAh(6060100*4)

Specs: PD65W
Size: 140*68*27.7mm



ITC-P5

25000mAh(6060100*5)

Specs: PD100W
Size: 140*68*39.7mm



ITC-P5

30000mAh(6060100*6)

Specs: PD140W
Size: 140*68*39.7mm

Specifications

PD30W

Material: ABS
Input: TYPE-C 5V/3.0A 9V/2.0A 12V/1.67A 15V/2A 20V/1.5A(30W max)
Output: TYPE-C 5V/3.0A 9V/3A 12V/2.5A 15V/2A 20V/1.5A(30W max)
PPS: 3.3V-11V/3A
Output: USB 5V/3A 9V/2A 12V/1.67A(20W max)
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD45W

Material: ABS
Input: TYPE-C 5V/3.0A 9V/2.0A 12V/1.67A 15V/2A 20V/1.5A(30W max)
Output: TYPE-C 5V/3.0A 9V/3A 12V/3A 15V/3A 20V/2.25A(45W max)
PPS: 3.3V-11V/3A, 3.3V-16V/3A
Output: USB 5V/3A 9V/2A 12V/1.67A(20W max)
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD35W

Material: ABS
Input: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A(35W)
Output: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A(35W)
Output: USB 5V/3A 9V/2A 12V/1.5A 10V/2.25A(22.5W)
Input: Type-C built in cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A(35W)
Output: Type-C built in cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A(35W)
IC solution: with OCP,OVP,ODP,SCP,OTP.

Specifications

PD65W

Material: ABS+rubber oil
Input: Micro 5V/2A 9V/2A 12V/1.5A(18W)
Input: Type-C 5V/3A 9V/3A 12/3A 15V/3A 20V/3A(60W)
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W max)
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W)
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD100W

Material: ABS+rubber oil
USB-C1 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 100W Max
USB-C2 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 100W Max
USB-A1 Output: 5V/3A 9V/2A 10V/2.25A 12V/1.5A 22.5W Max
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD140W

Material: ABS+rubber oil
USB-C1 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 28V/5A 140W Max
USB-C2 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 28V/5A 140W Max
USB-A1 Output: 5V/3A 9V/2A 10V/2.25A 12V/1.5A 22.5W Max
IC solution: with OCP,OVP,ODP,SCP,OTP



ITC-T6&ITC-P4

20000mAh(6060100*4)

Specs: PD45W
Size: 140*68*27.7mm



ITC-S6&ITC-D4

20000mAh(6060100*4)

Specs: PD45W
Size: 140*68*27.7mm



ITC-T2426

20000mAh(126280*2)

Specs: PD35W
Size: 116.7*70.5*27.7mm



ITC-S6&ITC-D4

20000mAh(6060100*4)

Specs: PD65W
Size: 140*68*27.7mm



ITC-D5

25000mAh(6060100*5)

Specs: PD100W
Size: 140*68*39.7mm



ITC-D5

30000mAh(6060100*6)

Specs: PD140W
Size: 140*68*39.7mm

Specifications

PD45W

Material: ABS+rubber oil
Input: Micro 5V/2A 9V/2A (18W max)
Input: Type-C 5V/3.0A 9V/2.0A 12V/1.5A 15V/2.66A 20V/2A(40W max)
Output: Type-C 5V/3.0A 9V/3A 12V/3A 15V/3 20V/2.25A(45W max)
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W max)
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD45W

Material: ABS+rubber oil
Input: Micro 5V/2A 9V/2A (18W max)
Input: Type-C 5V/3.0A 9V/2.0A 12V/1.5 15V/2.66A 20V/2A(40W max)
Output: Type-C 5V/3.0A 9V/3A 12V/3A 15V/3A 20V/2.25A(45W max)
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W max)
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD35W

Material: ABS
Input: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A
Output: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A
Output: USB 5V/3A 9V/2A 12V/1.5A 10V/2.25A
Input: Built-in Type-C cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A
Output: Built-in Type-C cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A

Specifications

PD65W

Material: ABS+rubber oil
Input: Micro 5V/2A 9V/2A 12V/1.5A(18W)
Input: Type-C 5V 3A 9V 3A 12V 3A 15V 3A 20V 3A(60W)
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W max)
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W)
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD100W

Material: ABS+rubber oil
USB-C1 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 100W Max
USB-C2 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 100W Max
USB-A1 Output: 5V/3A 9V/2A 10V/2.25A 12V/1.5A 22.5W Max
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD140W

Material: ABS+rubber oil
USB-C1 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 28V/5A 140W Max
USB-C2 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 28V/5A 140W Max
USB-A1 Output: 5V/3A 9V/2A 10V/2.25A 12V/1.5A 22.5W Max
IC solution: with OCP,OVP,ODP,SCP,OTP



ITC-G05

4500mAh/5000mAh(21700*1)

Specs: 2A
Size: 105*27*30mm

ITC-G03

4500mAh/5000mAh(21700*1)

Specs: 2A
Size: 127.9*30mm

ITC-C48

10000mAh(954292*1)

Specs: PD22.5W
Size: 133*50*22mm

ITC-G02

10000mAh(21700*2)

Specs: PD30W
Size: 116*51*24mm

ITC-Q01

10000mAh(954390*2)

Specs: 2A/PD22.5W
Size: 118*49.6*22.5mm

ITC-Q02

10000mAh(954390*2)

Specs: 2A/PD22.5W
Size: 112.8*49.2*22.5mm

ITC-Q03

10000mAh(954390*2)

Specs: 2A/PD22.5W
Size: 112.8*49.2*22.5mm

ITC-U03

6000/8000/9000/10000mAh(21700*2)

Specs: PD22.5W
Size: 97*50.8*25.7mm

Specifications

2A

Material: ABS+Torch
Input: TYPE-C 5V/2A
Output: USB A 5V/2A
Output: Built-in Type-C 20cm cable 2A

Specifications

2A

Material: Aluminum alloy+Torch
Input: TYPE-C 5V/2A
Output: USB A 5V/2A

Specifications

PD22.5W

Material: Aluminum alloy
Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

PD30W

Material: Aluminum alloy
Input: Type-C 1 5V/3A 9V/2A 12V/1.67A 15V/2A 20V/1.5A(30W)
Input: Type-C2 5V/3A 9V/2A 12V/1.67A 15V/2A 20V/1.5A(30W)
Output: Type-C2 5V/3A 9V/3A 9V/2.22A 12V/2.5A 15V/2A 20V/1.5A(30W)
PPS: 3.3-11V/3A, 3-16V/2A(32W)
Output: USB A 5V/3A 9V/2A 12V/1.5A(18W)
Output: Total USB A +USB C share 3A

Specifications

2A

Material: ABS
Input: Type-C 5V/2A
Output: USB 5V/2A

Specifications

2A

Material: ABS
Input: Type-C 5V/2A
Output: Type-C 5V/2A
Output: USB 5V/2A

Specifications

PD22.5W

Material: ABS
Input: Type-C 5V/3A 9V/2A
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.67A



ITC-T2300P

5000mAh(115570*1)

Specs: 2A/PD22.5W
Size: 104.6*63.3*14.5mm

ITC-T2310P

10000mAh(1260110*1)

Specs: 2A/PD22.5W
Size: 142.6*68.5*15.4mm

ITC-T2311P

20000mAh(1260110*2)

Specs: 2A/PD22.5W
Size: 143*69.7*28.3mm

ITC-T2303-3

10000mAh(1260110*1)

Specs: PD22.5W
Size: 138.3*69.3*16.3mm

ITC-T2304-3

20000mAh(1260110*2)

Specs: PD22.5W
Size: 139*69.2*28.4mm

ITC-T2401

30000mAh(21700*6)

Specs: PD20W
Size: 169*74.2*49.9mm

ITC-T2340

40000mAh(1260110*4)

Specs: PD20W/65W
Size: 197*73.7*54mm

ITC-T2347

50000mAh(1260110*5)

Specs: PD20W/65W
Size: 197*76.5*66mm

ITC-T2348

60000mAh(1260110*6)

Specs: PD20W/65W
Size: 197*76.5*78mm

Specifications

2A

Material: ABS
Input: Type-C 5V/2A
Output: USB1&2, 5V/2A

PD22.5W

Material: ABS
Input: Type-C 5V/2.4A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1&2, 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS
Input: Type-C 5V/2.4A 9V/2A 12V/1.5A
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

PD20W

Material: ABS
Input: TYPE-C 5V/3A 9V/2A
Output: TYPE-C 5V/3A 9V/2.22A 12V/1.65A
Output: USB1 5V/3A 9V/2.22A 12V/1.65A 10V/2A
Output: USB1 5V/3A 9V/2.22A 12V/1.65A 10V/2A

Specifications

PD65W

Material: ABS
Input: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A(60W Max)
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W Max)
Output: USB1/2 4.5V/5A 5V/4.5A 9V/2.22A 12V/1.67A(22.5W Max)

FRUIT POWER BANK



ITC-C21

3600MAH/2000MAH

Specs: 1A
Size: 72*76*24mm



ITC-C22

10000mAh

Specs: 2A
Size: 109*74*20mm



ITC-Y02

5000mAh

Specs: 2A
Size: 99*63*15mm



ITC-Y02-2

10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 100*63*27mm



ITC-Y02-4

10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 142*70*17mm



ITC-Y02-6

20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 142*70*29mm



ITC-Y02-8

10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 82*82*27mm



ITC-Y02-1

5000mAh

Specs: 2A
Size: 99*63*15mm



ITC-Y02-3

10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 100*63*27mm



ITC-Y02-5

10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 142*70*17mm



ITC-Y02-7

20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 142*70*29mm



ITC-Y02-9

10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 82*82*27mm

Specifications

1A

Material: ABS+PC+UV+Color Printing
Input: MICRO 5V/1A
Output: USB-A 5V/1A

Specifications

2A

Material: ABS+PC+UV+Color Printing
Input: MICRO 5V/2A
Output: USB-A 5V/2A

Specifications

2A

Material: ABS+PU
Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Material: ABS+PU
Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS+PU
Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS+PU
Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A



TG01
TWS earbuds

Battery: 25mAh/300mAh
Size: 56*50*21mm



TG04
TWS earbuds

Battery: 25mAh/220mAh
Size: 45.08*57.01*22.8mm



TG05-ENC
TWS earbuds

Battery: 45mAh/500mAh
Size: 61.6*44.5*25.6mm



TG06
TWS earbuds

Battery: 30mAh/180mAh
Size: 49.6*52.6*26.5mm



TG08
TWS earbuds

Battery: 30mAh/200mAh
Size: 55.5*52.7*27.5mm



TG08-Pro
TWS earbuds

Battery: 30mAh/200mAh
Size: 55.5*52.7*27.5mm



TG09
TWS earbuds

Battery: 30mAh/300mAh
Size: 55.9*50.4*23.4mm



TG10
TWS earbuds

Battery: 30mAh/1200mAh
Size: 55.9*50.4*23.4mm



TG11-ANC
TWS earbuds

Battery: 30mAh/180mAh
Size: 60*44.5*24.7mm



TG11 Pro
TWS earbuds

Battery: 30mAh/180mAh
Size: 60*44.5*24.7mm



TG12 Pro
TWS earbuds

Battery: 30mAh/180mAh
Size: 43.84*44*19.29mm



TG13
TWS earbuds

Battery: 30mAh/230mAh
Size: 49.92*44.5*22.86mm

Specifications

Materials: ABS
BT version: 5.3
Talk time: 3h
Music time: 3.5h
Charging time: 1.5h
BT transmit distance: >10M
Charging port: Type-C*1

Specifications

Material: ABS
BT version: 5.3
Talk time: 4h
Music time: 4.5h
Charging time: 1h
BT transmit distance: >10M
Charging port: TYPE-C*1

Specifications

Material: ABS+Zinc alloy
BT version: 5.3
Talk time: 5h
Music time: 6h
Charging time: 2.5 h
BT transmit distance: >10M
Charging port: TYPE-C*1

Specifications

Material: ABS+ PC
BT version: 5.3
Talk time: 4h
Music time: 4.5h
Charging time: 1h
BT transmit distance: >10M
Charging port: TYPE-C*1

Specifications

Material: ABS
BT version: 5.3
Talk time: 4h
Music time: 4.5h
Charging time: 1h
BT transmit distance: >10M
Charging port: TYPE-C*1

Specifications

Material: ABS
BT version: 5.3
Talk time: 3.5h
Music time: 4h
Charging time: 1h
BT transmit distance: >10M
Charging port: TYPE-C*1

Specifications

Material: ABS+ Zinc alloy
BT version: 5.3
Talk time: 4h
Music time: 4.5h
Charging time: 1.5h
BT transmit distance: >10M
Charging port: TYPE-C*1

Specifications

Material: ABS
BT version: 5.3
Talk time: 4h
Music time: 4.5h
Charging time: 9h
BT transmit distance: >10M
Charging port: TYPE-C*1

Specifications

Material: ABS+Metallic paint
BT version: 5.3
Talk time: 4h
Music time: 4.5h
Charging time: 1h
BT transmit distance: >13M
Charging port: TYPE-C*1

Specifications

Material: ABS
BT version: 5.3
Talk time: 4h
Music time: 4h
Charging time: 1h
BT transmit distance: >10M
Charging port: TYPE-C*1

Specifications

Material: ABS+Metallic paint
BT version: 5.3
Talk time: 3.5h
Music time: 4h
Charging time: 1h
BT transmit distance: >10M
Charging port: TYPE-C*1

Specifications

Material: ABS+Metallic paint
BT version: 5.3
Talk time: 4h
Music time: 4.5h
Charging time: 1h
BT transmit distance: >10M
Charging port: TYPE-C*1

PD100W SUPER FAST CHARGING POWER BANK

Best choice for your Laptop



ITC-PD02

10000mAh(18650*4)

Specs: PD100W
Size: 147*45*34mm



ITC-PD01

10000mAh(18650*4)

Specs: PD100W
Size: 147*45*34mm

Specifications

PD100W

Material: ABS
Input:TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A (100W Max)
Output:TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A 3.3-21V/5A PPS (100W Max)
Input:Built-in TYPE-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A (100W Max)
Output:Built-in TYPE-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A 3.3-21V/5A PPS (100W Max)
Output:USB port 5.0V/3.0A 9V/2.2A 10V/2.25A 12V/1.67A (22.5W Max)

Specifications

PD100W

Material: ABS
Input:TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A (100W Max)
Output:TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A 3.3-21V/5A PPS (100W Max)
Output:USB port 5.0V/3.0A 9V/2.22A 10V/2.25A 12V/1.67A (22.5W Max)