

# ITC

Make Life Easier


Shenzhen ITC Technology Co.,Ltd

Shenzhen ITC Technology Co.,Ltd

Email:info@itc-a.com Call:86-755-2335-4846

Web:www.itc-a.com

Add:1-3F, No. 52, Ditang Road, Sha San Community, Shajing Street, Bao'an District, Shenzhen,China518104

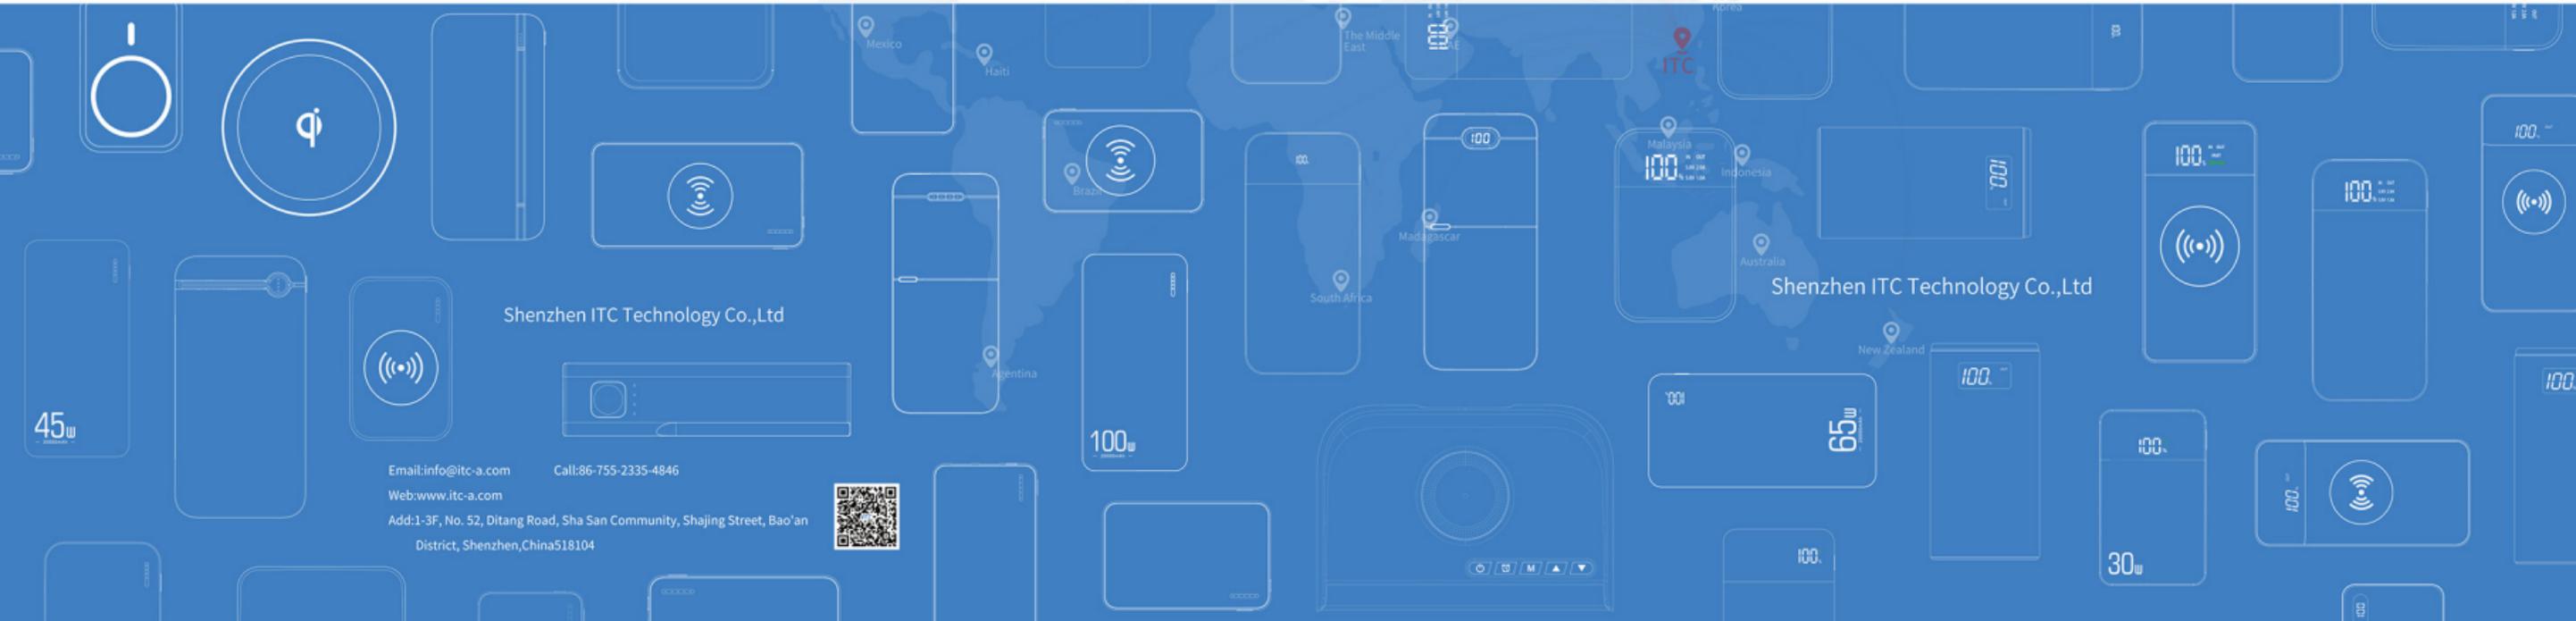



# ABOUT COMPANY

Shenzhen ITC Technology Co., Ltd. was founded in 2007 and is situated in Shenzhen, China. It is a high-tech enterprise that combines research and development, production, and sales. The company's main products cover a wide range, including power banks, wireless chargers, Bluetooth speakers, and other peripheral accessories for computers and mobile phones.

In recent years, in order to enhance the safety and stability of power banks, we have stepped up the development and application of new-generation battery technologies, namely lithium iron phosphate batteries, as well as solid and semi-solid batteries, in the power bank industry. In the future, the company plans to further expand its product portfolio to incorporate fast charging solutions, outdoor energy storage products, and new energy products. Our development objective is to become a leading expert in the field of next-generation mobile power banks.

With 18 years of rich experience in research and development, production, and export, we have grown into one of the most professional and competitive manufacturers in the industry. Our customers are spread across the globe, including those from the United States, Europe, the Middle East, Southeast Asia, and other regions. They consist of promotional companies, agents, brand owners, supermarkets, and chain stores. Notable clients include Walmart, Timberland, Nautica, Kooba, Steve Madden, Mont Blanc, JMC, Costco, and GreenHouse, among others.

ITC boasts a 2,000m<sup>2</sup> SMT workshop equipped with two state-of-the-art Japanese SMT machines. Additionally, it has an 8,000m<sup>2</sup> injection and assembly workshop with a workforce of over 300 employees. The company is also equipped with 12 sets of mold machines, 11 sets of injection molding machines, and 16 assembly production lines, enabling a daily production capacity of approx 60,000 units. Moreover, 20 sets of fully automatic aging equipment are available, which can conduct aging tests on 10,000 finished products simultaneously.

Our strong R&D team, consisting of around 15 employees, includes senior design engineers, senior hardware and software engineers, testing engineers, and other technical members, which significantly enhances our technological strength. Our R&D team is always committed to innovation and creation. We develop over 200 product models and 5 to 6 new exclusive molds every month.

ITC has successfully passed the audits of ISO9001, ISO14001, BSCI, and AF. All products manufactured by ITC comply with international certifications such as CE, FCC, RoHS, PSE, UL, CNS, KC, CB, and Qi. Every incoming material undergoes strict inspection before production and assembly, and the finished products are subjected to professional aging tests. With extensive experience in this industry, we are devoted to offering high-quality products and excellent design solutions to all our customers.

"Growing together with our customers" is our business philosophy. We always give top priority to our customers' interests and strive to achieve development and profitability by optimizing product quality. We firmly believe that the quality we provide today serves as the cornerstone for tomorrow's market success.

# QUALITY CERTIFICATE




# CONTENTS

PD30-140W POWER BANK WITH LiFePO <sub>4</sub> & SOLID-STATE BATTERIES	02	17	MINI POWER BANK DOCKING STATION
POWER BANK WITH LiFePO <sub>4</sub> BATTERIES	03-04	18	FAST CHARGING POWER BANK
SOLID-STATE BATTERIES POWER BANK	05-08	19-20	STATE-SOLID POWER BANK WITH BUILT-IN CABLE
POWER BANK	09-10&21-22	23-28	PD30-140W POWER BANK
POWER BANK WITH LED BACKLIGHT	11-12	29-30	TWS EARBUDS
POWER BANK WITH MAGNETIC WIRELESS	13-16		

## LAPTOP POWER BANK

LiFePO<sub>4</sub>/Solid-State batteries, 1000+ cycle life  
20000-30000mAh, PD30W 45W 65W 100W & 140W



ITC-HP01

20000mAh(6060105\*4/5560100\*4)

Size: 146\*132\*17.8mm

Specs: PD65W

Material: ABS

Input: Type-C1 5V-3A 9V-3A 12V-3A 15V-3A 20V-3A(60W Max)

Input: Type-C2 5V-3A 9V-3A 12V-3A 15V-3A 20V-3A(60W Max)

Output: Type-C2 5V-3A 9V-3A 12V-3A 15V-3A 20V-3.25A(65W Max)

Input: Type-C3 Built in Cable 5V-3A 9V-3A 12V-3A 15V-3A 20V-3A(60W Max)

Output: Type-C3 Built in Cable 5V-3A 9V-3A 12V-3A 15V-3A 20V-3.25A(65W Max)

Output: USB 5V-3A 9V-3A 12V-1.67A(20W Max)

# Power Bank with LiFePO<sub>4</sub> battery

10000mAh  
CAPACITY

20000mAh  
CAPACITY



\*Battery can work well even it is damaged.

SAFETY  
LiFePO<sub>4</sub>



Long  
cycle life



-20°C~75°C  
High temperature  
resistance

180<sub>WH/KG</sub>  
High energy Density

Environmental  
friendly



3<sub>H</sub>  
Fast charging capability  
Charging time 3H



ITC-A03-1

10000mAh(1260105\*1)

Specs: 2A/PD22.5W  
Size: 148.6\*69\*16.2mm



ITC-A03-2

10000mAh(1260105\*1)

Specs: 2A/PD22.5W  
Size: 148.6\*69\*16.2mm



ITC-A03-3

10000mAh(1260105\*1)

Specs: 2A/PD22.5W  
Size: 148.6\*69\*16.2mm



ITC-A03-4

10000mAh(1260105\*1)

Specs: 2A/PD22.5W  
Size: 148.6\*69\*16.2mm



ITC-B03-1

10000mAh(1260105\*1)

Specs: 2A/PD22.5W  
Size: 148.6\*69\*16.2mm



ITC-B03-2

10000mAh(1260105\*1)

Specs: 2A/PD22.5W  
Size: 148.6\*69\*16.2mm



ITC-A04-1

20000mAh(1260105\*2)

Specs: 2A/PD22.5W  
Size: 148.6\*69\*28.2mm



ITC-A04-2

20000mAh(1260105\*2)

Specs: 2A/PD22.5W  
Size: 148.6\*69\*28.2mm



ITC-A04-3

20000mAh(1260105\*2)

Specs: 2A/PD22.5W  
Size: 148.6\*69\*28.2mm



ITC-A04-4

20000mAh(1260105\*2)

Specs: 2A/PD22.5W  
Size: 148.6\*69\*28.2mm



ITC-B04-1

20000mAh(1260105\*2)

Specs: 2A/PD22.5W  
Size: 148.6\*69\*28.2mm



ITC-B04-2

20000mAh(1260105\*2)

Specs: 2A/PD22.5W  
Size: 148.6\*69\*28.2mm

## Specifications

2A(ACC port)

Material: ABS  
Input: TYPE-C1 5V/2A  
Output: TYPE-C2 5V/2A  
Output: USB 5V/2A

## Specifications

PD22.5W(ACC or ACA port)

Material: ABS  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2.22A 12V/1.67V  
Output: USB 5V/3A 9V/2.22A 12V/1.67A SCCP10V/2.25A

## SUPER SLIM POWER BANK SOLID-STATE BATTERIES ARE AVAILABLE



ITC-M01S

5000mAh(706074)

Specs: 2A/PD20W/PD22.5W  
Size: 103.8\*68\*10mm



ITC-M02

10000mAh(146074)

Specs: 2A/PD20W/PD22.5W  
Size: 103.8\*68\*17mm



ITC-M01

5000mAh(6458102)

Specs: 2A/PD20W/PD22.5W  
Size: 131.8\*66.2\*10.5mm



ITC-M03

10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W  
Size: 131.8\*66.2\*13.2mm



ITC-M04

20000mAh(9858102\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 131.8\*66.2\*23mm



ITC-ML01

5000mAh(5758102)

Specs: 2A/PD20W/PD22.5W  
Size: 130.5\*62.5\*8.8mm



ITC-ML03

10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W  
Size: 130.5\*62.5\*12.2mm



ITC-ML04

20000mAh(9858102\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 130.5\*62.5\*22mm



ITC-N01S

5000mAh(706074)

Specs: 2A/PD20W/PD22.5W  
Size: 103.8\*68\*10mm



ITC-N02

10000mAh(146074)

Specs: 2A/PD20W/PD22.5W  
Size: 103.8\*68\*17mm



ITC-N01

5000mAh(6458102)

Specs: 2A/PD20W/PD22.5W  
Size: 131.8\*66.2\*10.5mm



ITC-N03

10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W  
Size: 131.8\*66.2\*13.2mm



ITC-N04

20000mAh(9858102\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 131.8\*66.2\*23mm



ITC-NL01

5000mAh(5758102)

Specs: 2A/PD20W/PD22.5W  
Size: 130.5\*62.5\*8.8mm



ITC-NL03

10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W  
Size: 130.5\*62.5\*12.2mm



ITC-NL04

20000mAh(9858102\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 130.5\*62.5\*22mm

### Specifications

2A

Material: ABS  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

### Specifications

2A

Material: ABS  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

### Specifications

PD20W

Material: ABS  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

### Specifications

PD22.5W

Material: ABS  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 10V/2.25A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 10V/2.25A 12V/1.5A

### Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

### Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

### Specifications

PD20W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

### Specifications

PD22.5W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 10V/2.25A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 10V/2.25A 12V/1.5A

## SUPER SLIM ALUMINUM ALLOY POWER BANK SOLID-STATE BATTERIES ARE AVAILABLE



ITC-MS01

5000mAh(606280)

Specs: 2A/PD20W/PD22.5W  
Size: 108.5\*66.5\*8.8mm



ITC-MS01-M

5000mAh(536280/546280)

Specs: 2A+5W/PD22.5W+15W  
Size: 108.5\*66.5\*8.8mm



ITC-MS03

10000mAh(126280)

Specs: 2A/PD20W/PD22.5W  
Size: 108.5\*66.5\*14.8mm



ITC-MS04

20000mAh(126280\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 108.5\*66.5\*26.8mm



ITC-MX01

5000mAh(706074)

Specs: 2A/PD20W/PD22.5W  
Size: 102.5\*64.5\*9.8mm



ITC-MX01-M

5000mAh(606074/706074)

Specs: 2A+5W/PD22.5W+15W  
Size: 102.5\*64.5\*9.8mm



ITC-MX03

10000mAh(1376074)

Specs: 2A/PD20W/PD22.5W  
Size: 102.5\*64.5\*16.5mm



ITC-MX04

20000mAh(1376074\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 102.5\*64.5\*30.2mm



ITC-NS01

5000mAh(606280)

Specs: 2A/PD20W/PD22.5W  
Size: 108.5\*66.5\*8.8mm



ITC-NS03-M

10000mAh(126280)

Specs: 2A+5W/PD22.5W+15W  
Size: 108.5\*66.5\*15.8mm



ITC-NS03

10000mAh(126280)

Specs: 2A/PD20W/PD22.5W  
Size: 108.5\*66.5\*14.8mm



ITC-NS04

20000mAh(126280\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 108.5\*66.5\*26.8mm



ITC-NX01

5000mAh(706074)

Specs: 2A/PD20W/PD22.5W  
Size: 102.5\*64.5\*9.8mm



ITC-NX03-M

10000mAh(1376074)

Specs: 2A+5W/PD22.5W+15W  
Size: 102.5\*64.5\*17.5mm



ITC-NX03

10000mAh(1376074)

Specs: 2A/PD20W/PD22.5W  
Size: 102.5\*64.5\*16.5mm



ITC-NX04

20000mAh(1376074\*2)

Specs: 2A/PD20W/PD22.5W  
Size: 102.5\*64.5\*30.2mm

### Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

### Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

### Specifications

PD20W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

### Specifications

PD22.5W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 10V/2.25A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 10V/2.25A 12V/1.5A

### Specifications

PD22.5W+15W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/3A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A  
Output: USB 5V/3A 9V/2A 10V/2.25A 12V/1.5A  
Output: Magnetic Wireless 15W/10W/7.5W/5W

### Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

### Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

### Specifications

PD20W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

### Specifications

PD22.5W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 10V/2.25A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 10V/2.25A 12V/1.5A

### Specifications

PD22.5W+15W

Material: ABS(front)+Aluminum alloy(Back)  
Input: TYPE-C 5V/3A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A  
Output: USB 5V/3A 9V/2A 10V/2.25A 12V/1.5A  
Output: Magnetic Wireless 15W/10W/7.5W/5W



ITC-D01  
5000mAh

Specs: 2A  
Size: 100\*63.8\*15.8mm



ITC-D02  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 100\*63.8\*26.8mm



ITC-D03  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.8\*17.5mm



ITC-D04  
20000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.8\*28mm



ITC-D05  
30000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.8\*40mm



ITC-S1  
5000mAh

Specs: 2A  
Size: 100\*63.3\*13.5mm



ITC-S2  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 100\*63.3\*23mm



ITC-S3  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 152\*73.3\*14.5mm



ITC-S4  
20000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 152\*73.3\*23.8mm



ITC-S5  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.44\*15.7mm



ITC-S6  
20000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.44\*27.7mm



ITC-P01  
5000mAh

Specs: 2A  
Size: 100\*63.8\*15.8mm



ITC-P02  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 100\*63.8\*26.8mm



ITC-P03  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.8\*17.5mm



ITC-P04  
20000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.8\*28mm



ITC-P05  
30000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.8\*40mm



ITC-T1  
5000mAh

Specs: 2A  
Size: 100\*63.3\*13.5mm



ITC-T2  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 100\*63.3\*23mm



ITC-T3  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 152\*73.3\*14.5mm



ITC-T4  
20000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 152\*73.3\*23.8mm



ITC-T5  
10000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.44\*15.7mm



ITC-T6  
20000mAh

Specs: 2A/PD20W/PD22.5W  
Size: 140\*68.44\*27.7mm

## Specifications

2A

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

2A

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

PD20W

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

## Specifications

PD22.5W

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

## Specifications

2A

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

2A

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A

## Specifications

PD20W

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A

## Specifications

PD22.5W

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A



**ITC-ML01**  
5000mAh(6458102)

Specs: 2A+Backlight  
Size: 130.5\*62.5\*8.8mm



**ITC-ML03**  
10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 130.5\*62.5\*12.2mm



**ITC-NL01**  
5000mAh(6458102)

Specs: 2A+Backlight  
Size: 130.5\*62.5\*8.8mm



**ITC-NL03**  
10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 130.5\*62.5\*12.2mm



**ITC-D01**  
5000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 100\*63.8\*15.8mm



**ITC-D02**  
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 100\*63.8\*26.8mm



**ITC-D03**  
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 140\*68.8\*17.5mm



**ITC-S3**  
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 152\*73.3\*14.5mm



**ITC-P01**  
5000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 100\*63.8\*15.8mm



**ITC-P02**  
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 100\*63.8\*26.8mm



**ITC-P03**  
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 140\*68.8\*17.5mm



**ITC-T3**  
10000mAh

Specs: 2A/PD20W/PD22.5W+Backlight  
Size: 152\*73.3\*14.5mm

**Specifications**

**2A+Backlight**

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Backlight: LOGO

**Specifications**

**2A+Backlight**

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Backlight: LOGO

**Specifications**

**PD20W+Backlight**

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A  
Backlight: LOGO

**Specifications**

**PD22.5W+Backlight**

Material: ABS(front)+Aluminum alloy(Back)+PC  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 10V/2.25A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 10V/2.25A 12V/1.5A  
Backlight: LOGO

**Specifications**

**2A+Backlight**

Material: ABS+PC  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Backlight: LOGO

**Specifications**

**2A+Backlight**

Material: ABS+PC  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Backlight: LOGO

**Specifications**

**PD20W+Backlight**

Material: ABS+PC  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/3A 9V/2A 12V/1.5A  
Backlight: LOGO

**Specifications**

**PD22.5W+Backlight**

Material: ABS+PC  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A  
Backlight: LOGO

# Magnetic Wireless Power Bank 5k/10kmAh

Slim and Compact



Stronger Magnetic Connection



MS03-M  
10000mAh



MS01-M  
5000mAh

## POWER BANK WITH MAGNETIC WIRELESS



ITC-S1-M  
5000mAh(955465\*1)

Specs: 2A+5W/PD20W+15W(Magnetic)  
Size: 100\*63.3\*14.82mm



ITC-S2-M  
10000mAh(955465\*2)

Specs: 2A+5W/PD20W+15W(Magnetic)  
Size: 100\*63.3\*24.82mm



ITC-S8-M  
5000mAh(706074\*1)

Specs: 2A+5W/PD20W+15W(Magnetic)  
Size: 105.2\*67.8\*13.9mm

Solid-State batteries are available



ITC-S9-M  
10000mAh(1376074\*1)

Specs: 2A+5W/PD20W+15W(Magnetic)  
Size: 105.2\*67.8\*20mm

Solid-State batteries are available

### Specifications

2A+5W

Material: ABS  
Input: MICRO 5V/2A  
Input: TYPE-C 5V/2A  
Output: USB1 5V/2A  
Output: USB2 5V/2A  
Output: Magnetic Wireless 5W

### Specifications

PD20W+15W

Material: ABS  
Input: MICRO 5V/2A 9V/2A  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1&2, 5V/3A 9V/2A 12V/1.5A  
Output: Magnetic Wireless 15W/10W/7.5W/5W

### Specifications

2A+5W

Material: ABS+PU  
Input: TYPE-C 5V/2A  
Output: USB 5V/2A  
Output: Magnetic Wireless 5W

### Specifications

PD20W+15W

Material: ABS+PU  
Input: TYPE-C 5V/2.4A 9V/2A  
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB 5V/3A 9V/2A 12V/1.5A  
Output: Magnetic Wireless 15W/10W/7.5W/5W



IITC-LM04  
5000mAh(546280\*1)

Specs: PD20W+15W(Magnetic)  
Size: 106.8\*69.4\*9.5mm



IITC-LM08  
10000mAh(126280\*1)

Specs: PD20W+15W(Magnetic)  
Size: 106.8\*69.4\*15.2mm



IITC-LM02  
5000mAh(955465\*1)

Specs: PD22.5W+15W(Magnetic)  
Size: 98.5\*62.9\*14.6mm



IITC-LM02C  
5000mAh(955465\*1)

Specs: PD22.5W+15W(Magnetic)  
Size: 98.5\*62.9\*14.6mm



IITC-LM03  
10000mAh(1376074\*1)

Specs: PD22.5W+15W(Magnetic)  
Size: 101.7\*67.7\*19.9mm



IITC-LM03C  
10000mAh(1376074\*1)

Specs: PD22.5W+15W(Magnetic)  
Size: 101.7\*67.7\*19.9mm



IITC-LM02H  
5000mAh(955465\*1)

Specs: PD22.5W+15W(Magnetic)  
Size: 98.5\*62.9\*14.6mm



IITC-LM02CH  
5000mAh(955465\*1)

Specs: PD22.5W+15W(Magnetic)  
Size: 98.5\*62.9\*14.6mm



IITC-LM03H  
10000mAh(1376074\*1)

Specs: PD22.5W+15W(Magnetic)  
Size: 101.7\*67.7\*19.9mm



IITC-LM03CH  
10000mAh(1376074\*1)

Specs: PD22.5W+15W(Magnetic)  
Size: 101.7\*67.7\*19.9mm

## Specifications

PD20W+15W

Material: ABS

Input: Type-C 5V/3A 9V/2A

Output: Type-C 5V/3A 9V/2.22A 12V/1.67A

Output: Magnetic Wireless 15W Max

## Specifications

PD22.5W+15W

Material: ABS

Input: Type-C 5V/3A 9V/2A

Output: Type-C 5V/3A 9V/2.22A 12V/1.67A

Output: USB 5V/3A 9V/2.22A 12V/1.67A 10V/2.25A

Output: Magnetic Wireless 15W Max

## Specifications

PD22.5W+15W

Material: ABS

Input: Type-C 5V/3A 9V/2A

Output: Type-C 5V/3A 9V/2.22A 12V/1.67A

Output: USB 5V/3A 9V/2.22A 12V/1.67A 10V/2.25A

Output: Magnetic Wireless 15W Max



ITC-MP01

5000mAh\*4PCS(21700\*1)

Specs: PD20W  
Size: 79.2\*38.2\*25.5mm

ITC-MP02

5000mAh\*4PCS(21700\*1)

Specs: PD20W  
Size: 88\*39.2\*30.7mm

ITC-PZ01

5000mAh(21700\*1)

Specs: PD20W  
Size: 79.2\*38.2\*25.5mm

ITC-PW01

5000mAh(21700\*1)

Specs: PD20W  
Size: 88\*39.2\*30.7mm

ITC-PZ02

5000mAh(21700\*1)

Specs: PD20W  
Size: 79.14\*46.15\*27mm

ITC-AP01

5000mAh(21700\*1)

Specs: PD22.5W  
Size: 114\*35\*32mm

ITC-AP02

10000mAh(21700\*2)

Specs: PD22.5W  
Size: 115\*53.5\*37.54mm

## Specifications

## PD20W

Material: ABS  
Input: (Power Bank)Pogo Pin 9V/2A  
USB-C1 5V/2A 9V/2A  
USB-C2 5V/3A 9V/2A  
Output: (Power Bank)USB-C2 or LT 5V/3A 9V/2.22A 12V/1.67A  
Input: (Dock)USB-C 5V/2.5A  
Output: (Dock)Pogo Pin1/2/3/4 9V/2A

## Specifications

## PD20W

Material: ABS  
Input: (Power Bank)Pogo Pin 9V/2A  
USB-C1 5V/2A 9V/2A  
USB-C2 5V/3A 9V/2A  
Output: (Power Bank)USB-C2 or LT 5V/3A 9V/2.22A 12V/1.67A  
Input: (Dock)USB-C 5V/2.5A  
Output: (Dock)Pogo Pin1/2/3/4 9V/2A

## Specifications

## PD20W

Material: ABS  
Input: Type-C1 5V/2A 9V/2A 18W  
Input: Type-C2 5V/3A 9V/2A 18W  
Output: Type-C USB-C2 or LT  
5V/3A 9V/2.22A 12V/1.67A 20W

## Specifications

## PD20W

Material: ABS  
Input: Type-C Type-C & LT 2in1 connector:  
5V/2A 9V/2A 18W  
Output: Type-C Type-C & LT 2in1 connector:  
5V/3A 9V/2.22A 12V/1.67A 20W  
Output: Built-in Type-C or Lightning Cable:  
5V/3A 9V/2.22A 12V/1.67A 20W

## Specifications

## PD22.5W

Material: ABS  
Input: AC 90-264V,50-60Hz,0.5A  
AC Charging for Power Bank: 5V/2.4A  
Output: Type-C&Type-C cable(AC mode): 5V/2A  
Input: Type-C 5V/3A 9V/2A 12V/1.5A 18W  
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A 20W  
Output: Built-in Cable  
Type-C cable: 5V/3A 9V/2.22A 12V/1.67A 20W

## Specifications

## PD22.5W

Material: ABS  
Input: AC 90-264V,50-60Hz,0.5A  
AC Charging for Power Bank: 5V/2.4A  
Output: USB & Type-C & Type-C cable & Lightning  
cable(AC mode): 5V/2A  
Input: Type-C 5V/3A 9V/2A 12V/1.5A 18W  
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A 20W  
Output: USB 5V/3A 9V/2A 10V/2.25A 12V/1.5A 22.5W  
Output: Built-in Cable  
Type-C cable:  
5V/3A 9V/2.22A 12V/1.67A 20W  
Output Lightning cable: 5V/2A



**ITC-T2423-3**  
1000mAh(126280\*1)  
Specs: PD22.5W  
Size: 113.5\*69.8\*16mm

**ITC-T2424-3**  
2000mAh(126280\*2)  
Specs: PD22.5W  
Size: 113.5\*69.8\*27.5mm

**ITC-T2430-3**  
1000mAh(105555\*2)  
Specs: PD22.5W  
Size: 119\*63.6\*25.1mm

**ITC-T2432-3**  
1000mAh(955465\*2)  
Specs: PD35W  
Size: 155.5\*63.8\*25.7mm

**ITC-T2438-3**  
2000mAh(126280\*2)  
Specs: PD35W  
Size: 170\*71\*27.7mm

**ITC-T2434-3**  
2000mAh(126280\*2)  
Specs: PD35W  
Size: 121.2\*69.2\*27.2mm

**ITC-T2427-2**  
1000mAh(21700\*2)  
Specs: PD35W  
Size: 92.2\*60.3\*25.6mm

**ITC-T2431-2**  
2000mAh(1260110\*2)  
Specs: PD35W  
Size: 117.5\*79.1\*27.6mm

**ITC-T2435**  
1000mAh(21700\*2)  
Specs: PD22.5W  
Size: 132.6\*52\*32.5mm

**ITC-T2504-3**  
1000mAh(146074\*1)  
Specs: PD22.5W+15W(Magnetic)  
Size: 105\*67.6\*19.3mm

**ITC-T2502-1**  
1000mAh(21700\*2)  
Specs: PD35W  
Size: 124\*52\*25.6mm

Specifications

PD22.5W

Material: ABS (ITC-T2423-3 / ITC-T2424-3)  
Input: Type-C 5V/3A 9V/2A  
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A  
Output: USB 5V/3A 9V/2A 12V/1.5A 10V/2.25A

Specifications

PD22.5W

Material: ABS (ITC-T2430-3)  
Input: Type-C 5V/3A 9V/2A 12V/1.5A  
Output: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Input: Built-in Type-C cable 5V/3A 9V/2A 12V/1.5A  
Output: Built-in Type-C cable 5V/3A 9V/2.22A 12V/1.67A

Specifications

PD35W

Material: ABS (ITC-T2432-3 / ITC-T2438-3)  
Input: Type-C 5V/3A 9V/3A 12V/2.5A 15V/2A 20V/1.5A  
Output: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Output: USB 5V/3A 9V/2A 12V/1.5A 10V/2.25A  
Input: Built-in Type-C cable 5V/3A 9V/3A 12V/2.5A 15V/2A 20V/1.5A  
Output: Built-in Type-C cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Input: Built-in Type-C cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Output: Built-in Lightning cable 5V/2A

Specifications

PD35W

Material: ABS (ITC-T2434-3)  
Input: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Output: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Output: USB 5V/3A 9V/2A 12V/1.5A 10V/2.25A  
Input: Built-in Type-C cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Output: Built-in Type-C cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A

Specifications

PD35W

Material: ABS  
Input: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Output: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Output: USB 5V/3A 9V/2A 12V/1.5A 10V/2.25A  
Input: Built-in Type-C cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Output: Built-in Type-C cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A

Specifications

PD22.5W

Material: ABS  
Input: Type-C 5V/3A 9V/2A 12V/1.5A  
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A 10V/2.25A  
Output: USB 5V/3A 9V/2A 12V/1.5A 10V/2.25A  
Input: Built-in Type-C cable 5V/3A 9V/2.22A 12V/1.67A 10V/2.25A  
Output: Built-in Lightning cable 5V/2A  
Input: AC 5V/2A 9V/2A 12V/1.5A

Specifications

PD22.5W+15W

Material: ABS  
Input: Type-C 5V/3A 9V/2A 12V/1.5A  
Output: Type-C 5V/3A 9V/2.22A 12V/1.67A 10V/2.25A  
Input: Built-in Type-C cable 5V/3A 9V/2A 12V/1.5A  
Output: Built-in Type-C cable 5V/3A 9V/2.22A 12V/1.67A 10V/2.25A  
Output: Magnetic wireless 15Max

Specifications

PD35W

Material: ABS  
Input: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Output: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Output: USB 5V/3A 9V/2A 12V/1.5A 10V/2.25A  
Input: Built-in Type-C cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Output: Built-in Type-C cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A



ITC-T2300P

5000mAh(115570\*1)

Specs: 2A/PD22.5W  
Size: 104.6\*63.3\*14.5mm

ITC-T2310P

10000mAh(1260110\*1)

Specs: 2A/PD22.5W  
Size: 142.6\*68.5\*15.4mm

ITC-T2311P

20000mAh(1260110\*2)

Specs: 2A/PD22.5W  
Size: 143\*69.7\*28.3mm

ITC-T2303-3

10000mAh(1260110\*1)

Specs: PD22.5W  
Size: 138.3\*69.3\*16.3mm

ITC-T2304-3

20000mAh(1260110\*2)

Specs: PD22.5W  
Size: 139\*69.2\*28.4mm

ITC-T2401

30000mAh(126280\*3)

Specs: PD20W  
Size: 169\*74.2\*49.9mm

ITC-T2340

40000mAh(1260110\*4)

Specs: PD20W/65W  
Size: 197\*73.7\*54mm

ITC-T2347

50000mAh(1260110\*5)

Specs: PD20W/65W  
Size: 197\*76.5\*66mm

ITC-T2348

60000mAh(1260110\*6)

Specs: PD20W/65W  
Size: 197\*76.5\*78mm

## Specifications

2A

Material: ABS  
Input: Type-C 5V/2A  
Output: USB1&2, 5V/2A

PD22.5W

Material: ABS  
Input: Type-C 5V/2.4A 9V/2A 12V/1.5A  
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB1&2, 5V/3A 9V/2A 10V/2.25A 12V/1.5A

## Specifications

PD22.5W

Material: ABS  
Input: Type-C 5V/2.4A 9V/2A 12V/1.5A  
Output: Type-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A  
Output: USB 5V/3A 9V/2A 10V/2.25A 12V/1.5A

## Specifications

PD20W

Material: ABS  
Input: TYPE-C 5V/3A 9V/2A  
Output: TYPE-C 5V/3A 9V/2.22A 12V/1.65A  
Output: USB1 5V/3A 9V/2.22A 12V/1.65A 10V/2A  
Output: USB1 5V/3A 9V/2.22A 12V/1.65A 10V/2A

## Specifications

PD65W

Material: ABS  
Input: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A(60W Max)  
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W Max)  
Output: USB1/2, 4.5V/5A 5V/4.5A 9V/2.22A 12V/1.67A(22.5W Max)

**ITC-C01**

9600mAh/10000mAh(18650\*3)

Specs: PD30W  
Size: 100\*62.5\*22.5mm**ITC-C01**

9600mAh/10000mAh(18650\*3)

Specs: PD45W  
Size: 100\*62.5\*22.5mm**ITC-T2411**

10000mAh(21700\*2)

Specs: PD35W  
Size: 117\*51.7\*26.5mm**ITC-T6&ITC-P4**

20000mAh(6060100\*4)

Specs: PD65W  
Size: 140\*68\*27.7mm**ITC-P5**

25000mAh(6060100\*5)

Specs: PD100W  
Size: 140\*68\*39.7mm**ITC-P5**

30000mAh(6060100\*6)

Specs: PD140W  
Size: 140\*68\*39.7mm**Specifications****PD30W**Material: ABS  
Input: TYPE-C 5V/3.0A 9V/2.0A 12V/1.67A 15V/2A 20V/1.5A(30W max)  
Output: TYPE-C 5V/3.0A 9V/3A 12V/2.5A 15V/2A 20V/1.5A(30W max)  
PPS: 3.3V-11V/3A  
Output: USB 5V/3A 9V/2A 12V/1.67A(20W max)  
IC solution: with OCP,OVP,ODP,SCP,OTP**Specifications****PD45W**Material: ABS  
Input: TYPE-C 5V/3.0A 9V/2.0A 12V/1.67A 15V/2A 20V/1.5A(30W max)  
Output: TYPE-C 5V/3.0A 9V/3A 12V/3A 15V/3A 20V/2.25A(45W max)  
PPS: 3.3V-11V/3A, 3.3V-16V/3A  
Output: USB 5V/3A 9V/2A 12V/1.67A(20W max)  
IC solution: with OCP,OVP,ODP,SCP,OTP**Specifications****PD35W**Material: ABS  
Input: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A(35W)  
Output: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A(35W)  
Output: USB 5V/3A 9V/2A 12V/1.5A 10V/2.25A(22.5W)  
Input: Type-C built in cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A(35W)  
Output: Type-C built in cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A(35W)  
IC solution: with OCP,OVP,ODP,SCP,OTP**Specifications****PD65W**Material: ABS  
Input: Micro 5V/2A 9V/2A 12V/1.5A(18W)  
Input: Type-C 5V/3A 9V/3A 12/3A 15V/3A 20V/3A(60W)  
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W max)  
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W)  
IC solution: with OCP,OVP,ODP,SCP,OTP**Specifications****PD100W**Material: ABS  
USB-C1 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 100W Max  
USB-C2 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 100W Max  
USB-A1 Output: 5V/3A 9V/2A 10V/2.25A 12V/1.5A 22.5W Max  
IC solution: with OCP,OVP,ODP,SCP,OTP**Specifications****PD140W**Material: ABS  
USB-C1 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 28V/5A 140W Max  
USB-C2 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 28V/5A 140W Max  
USB-A1 Output: 5V/3A 9V/2A 10V/2.25A 12V/1.5A 22.5W Max  
IC solution: with OCP,OVP,ODP,SCP,OTP



ITC-T6&ITC-P4

20000mAh(6060100\*4)

Specs: PD45W  
Size: 140\*68\*27.7mm



ITC-S6&ITC-D4

20000mAh(6060100\*4)

Specs: PD45W  
Size: 140\*68\*27.7mm



ITC-T2426

20000mAh(126280\*2)

Specs: PD35W  
Size: 116.7\*70.5\*27.7mm



ITC-S6&ITC-D4

20000mAh(6060100\*4)

Specs: PD65W  
Size: 140\*68\*27.7mm



ITC-D5

25000mAh(6060100\*5)

Specs: PD100W  
Size: 140\*68\*39.7mm



ITC-D5

30000mAh(6060100\*6)

Specs: PD140W  
Size: 140\*68\*39.7mm

Specifications

PD45W

Material: ABS+rubber oil  
Input: Micro 5V/2A 9V/2A (18W max)  
Input: Type-C 5V/3.0A 9V/2.0A 12V/1.5A 15V/2.66A 20V/2A(40W max)  
Output: Type-C 5V/3.0A 9V/3A 12V/3A 15V/3 20V/2.25A(45W max)  
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W max)  
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD45W

Material: ABS+rubber oil  
Input: Micro 5V/2A 9V/2A (18W max)  
Input: Type-C 5V/3.0A 9V/2.0A 12V/1.5 15V/2.66A 20V/2A(40W max)  
Output: Type-C 5V/3.0A 9V/3A 12V/3A 15V/3A 20V/2.25A(45W max)  
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W max)  
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD35W

Material: ABS  
Input: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Input: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Output: USB 5V/3A 9V/2A 12V/1.5A 10V/2.25A  
Input: Built-in Type-C cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A  
Output: Built-in Type-C cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A

Specifications

PD65W

Material: ABS+rubber oil  
Input: Micro 5V/2A 9V/2A 12V/1.5A(18W)  
Input: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A(60W)  
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W max)  
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W)  
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD100W

Material: ABS  
USB-C1 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 100W Max  
USB-C2 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 100W Max  
USB-A1 Output: 5V/3A 9V/2A 10V/2.25A 12V/1.5A 22.5W Max  
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD140W

Material: ABS  
USB-C1 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 140W Max  
USB-C2 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 140W Max  
USB-A1 Output: 5V/3A 9V/2A 10V/2.25A 12V/1.5A 22.5W Max  
IC solution: with OCP,OVP,ODP,SCP,OTP



**ITC-PD02**

10000mAh(18650\*4)

Specs: PD100W  
Size: 147\*45\*34mm

**ITC-PD01**

10000mAh(18650\*4)

Specs: PD100W  
Size: 147\*45\*34mm

**ITC-PD03**

20000mAh(21700\*4)

Specs: PD100W  
Size: 147\*52\*48mm

**ITC-PD04**

20000mAh(21700\*4)

Specs: PD100W  
Size: 147\*52\*48mm

**Specifications**

**PD100W**

Material: ABS+PC  
Input: TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A (100W Max)  
Output: TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A 3.3-21V/5A PPS (100W Max)  
Input: Built-in TYPE-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A (100W Max)  
Output: Built-in TYPE-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A 3.3-21V/5A PPS (100W Max)  
Output: USB 5.0V/3.0A 9V/2.22A 10V/2.25A 12V/1.67A (22.5W Max)

**Specifications**

**PD100W**

Material: ABS+PC  
Input: TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A (100W Max)  
Output: TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A 3.3-21V/5A PPS (100W Max)  
Output: USB 5.0V/3.0A 9V/2.22A 10V/2.25A 12V/1.67A (22.5W Max)

**Specifications**

**PD100W**

Material: ABS+PC  
Input: Type-C 1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A(60W Max)  
Input: Type-C 2 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A(60W Max)  
Output: Type-C 1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A 20V/5.0A(100W Max)  
Output: Type-C 2 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A 20V/5.0A(100W Max)  
Output: USB 5.0V/2.1A 9V/2.0A 10V/2.25A 12V/1.5A(22.5W Max)

**Specifications**

**PD100W**

Material: ABS+PC  
Input: Type-C 1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A(60W Max)  
Output: Type-C 1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A 20V/5.0A(100W Max)  
Output: USB 5.0V/2.1A 9V/2.0A 10V/2.25A 12V/1.5A(22.5W Max)  
Input: Built-in Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A 20V/5.0A(100W Max)  
Output: Built-in Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A 20V/5.0A(100W Max)



TG01  
TWS earbuds

Battery: 25mAh/300mAh  
Size: 56\*50\*21mm



TG04  
TWS earbuds

Battery: 25mAh/220mAh  
Size: 45.08\*57.01\*22.8mm



TG05-ENC  
TWS earbuds

Battery: 45mAh/500mAh  
Size: 61.6\*44.5\*25.6mm



TG06  
TWS earbuds

Battery: 30mAh/180mAh  
Size: 49.6\*52.6\*26.5mm



TG08  
TWS earbuds

Battery: 30mAh/200mAh  
Size: 55.5\*52.7\*27.5mm



TG08-Pro  
TWS earbuds

Battery: 30mAh/200mAh  
Size: 55.5\*52.7\*27.5mm



TG09  
TWS earbuds

Battery: 30mAh/300mAh  
Size: 55.9\*50.4\*23.4mm



TG10  
TWS earbuds

Battery: 30mAh/1200mAh  
Size: 55.9\*50.4\*23.4mm



TG11-ANC  
TWS earbuds

Battery: 30mAh/180mAh  
Size: 60\*44.5\*24.7mm



TG11 Pro  
TWS earbuds

Battery: 30mAh/180mAh  
Size: 60\*44.5\*24.7mm



TG12 Pro  
TWS earbuds

Battery: 30mAh/180mAh  
Size: 43.84\*44\*19.29mm



TG13  
TWS earbuds

Battery: 30mAh/230mAh  
Size: 49.92\*44.5\*22.86mm

#### Specifications

Materials: ABS  
BT version: 5.3  
Talk time: 3h  
Music time: 3.5h  
Charging time: 1.5h  
BT transmit distance: >10M  
Charging port: TYPE-C\*1

#### Specifications

Material: ABS  
BT version: 5.3  
Talk time: 4h  
Music time: 4.5h  
Charging time: 1h  
BT transmit distance: >10M  
Charging port: TYPE-C\*1

#### Specifications

Material: ABS+Zinc alloy  
BT version: 5.3  
Talk time: 3h  
Music time: 6h  
Charging time: 2.5 h  
BT transmit distance: >10M  
Charging port: TYPE-C\*1

#### Specifications

Material: ABS+ PC  
BT version: 5.3  
Talk time: 4h  
Music time: 4.5h  
Charging time: 1h  
BT transmit distance: >10M  
Charging port: TYPE-C\*1

#### Specifications

Material: ABS  
BT version: 5.3  
Talk time: 4h  
Music time: 4.5h  
Charging time: 1h  
BT transmit distance: >10M  
Charging port: TYPE-C\*1

#### Specifications

Material: ABS  
BT version: 5.3  
Talk time: 3.5h  
Music time: 4h  
Charging time: 1h  
BT transmit distance: >10M  
Charging port: TYPE-C\*1

#### Specifications

Material: ABS+ Zinc alloy  
BT version: 5.3  
Talk time: 4h  
Music time: 4.5h  
Charging time: 1.5h  
BT transmit distance: >10M  
Charging port: TYPE-C\*1

#### Specifications

Material: ABS  
BT version: 5.3  
Talk time: 4h  
Music time: 4.5h  
Charging time: 9h  
BT transmit distance: >10M  
Charging port: TYPE-C\*1

#### Specifications

Material: ABS+Metallic paint  
BT version: 5.3  
Talk time: 4h  
Music time: 4.5h  
Charging time: 1h  
BT transmit distance: >13M  
Charging port: TYPE-C\*1

#### Specifications

Material: ABS  
BT version: 5.3  
Talk time: 3.5h  
Music time: 4h  
Charging time: 1h  
BT transmit distance: >10M  
Charging port: TYPE-C\*1

#### Specifications

Material: ABS+Metallic paint  
BT version: 5.3  
Talk time: 3.5h  
Music time: 4h  
Charging time: 1h  
BT transmit distance: >10M  
Charging port: TYPE-C\*1

#### Specifications

Material: ABS+Metallic paint  
BT version: 5.3  
Talk time: 4h  
Music time: 4.5h  
Charging time: 1h  
BT transmit distance: >10M  
Charging port: TYPE-C\*1



## 2025 SUPER SLIM SERIES

Slimmest size  
only 0.39 inch thick



5000  
mAh

10000  
mAh

20000  
mAh