



ITC

Make Life Easier

Shenzhen ITC Technology Co.,Ltd

Shenzhen ITC Technology Co.,Ltd

Email:info@itc-a.com Call:86-755-2335-4846

Web:www.itc-a.com

Add:1-3F, No. 52, Ditang Road, Sha San Community, Shajing Street, Bao'an District, Shenzhen,China518104



ABOUT COMPANY

Shenzhen ITC Technology Co., Ltd. was founded in 2007 and is situated in Shenzhen, China. It is a high-tech enterprise that combines research and development, production, and sales. The company's main products cover a wide range, including power banks, wireless chargers, Bluetooth speakers, and other peripheral accessories for computers and mobile phones.

In recent years, in order to enhance the safety and stability of power banks, we have stepped up the development and application of new-generation battery technologies, namely lithium iron phosphate batteries, as well as solid and semi-solid batteries, in the power bank industry. In the future, the company plans to further expand its product portfolio to incorporate fast charging solutions, outdoor energy storage products, and new energy products. Our development objective is to become a leading expert in the field of next-generation mobile power banks.

With 18 years of rich experience in research and development, production, and export, we have grown into one of the most professional and competitive manufacturers in the industry. Our customers are spread across the globe, including those from the United States, Europe, the Middle East, Southeast Asia, and other regions. They consist of promotional companies, agents, brand owners, supermarkets, and chain stores. Notable clients include Walmart, Timberland, Nautica, Kooba, Steve Madden, Mont Blanc, JMC, Costco, and GreenHouse, among others.

ITC boasts a 2,000m² SMT workshop equipped with two state-of-the-art Japanese SMT machines. Additionally, it has an 8,000m² injection and assembly workshop with a workforce of over 300 employees. The company is also equipped with 12 sets of mold machines, 11 sets of injection molding machines, and 16 assembly production lines, enabling a daily production capacity of approx 60,000 units. Moreover, 20 sets of fully automatic aging equipment are available, which can conduct aging tests on 10,000 finished products simultaneously.

Our strong R&D team, consisting of around 15 employees, includes senior design engineers, senior hardware and software engineers, testing engineers, and other technical members, which significantly enhances our technological strength. Our R&D team is always committed to innovation and creation. We develop over 200 product models and 5 to 6 new exclusive molds every month.

ITC has successfully passed the audits of ISO9001, ISO14001, BSCI, and AF. All products manufactured by ITC comply with international certifications such as CE, FCC, RoHS, PSE, UL, CNS, KC, CB, and Qi. Every incoming material undergoes strict inspection before production and assembly, and the finished products are subjected to professional aging tests. With extensive experience in this industry, we are devoted to offering high-quality products and excellent design solutions to all our customers.

"Growing together with our customers" is our business philosophy. We always give top priority to our customers' interests and strive to achieve development and profitability by optimizing product quality. We firmly believe that the quality we provide today serves as the cornerstone for tomorrow's market success.

CONTENTS

MAGNETIC WIRELESS POWER BANK 01-04

POWER BANK WITH BUILT-IN CABLE 05-06

POWER BANK WITH LiFePO₄ BATTERIES 07-08

SOLID-STATE BATTERIES POWER BANK 09-12

12-14 POWER BANK

15-16 MINI POWER BANK DOCKING STATION

17-23 35W-140W ULTRA-FAST CHARGING POWER BANK

24 TWS EARBUDS

15W Magnetic Wireless Power Bank

5000mAh-10000mAh Capacity



Stronger Magnetic Connection



Smart Display On Demand

MAGNETIC WIRELESS POWER BANK WITH TFT SCREEN



ITC-MAC05T



ITC-MAC05TB



ITC-MACC05TK



ITC-MACC05T



ITC-MAC10T



ITC-MAC10TB



ITC-MACC10TK



ITC-MACC10T

Specifications

PD22.5W+15W

Material: ABS
Capacity: 5000mAh (955465*1)
Input: Type-C port 5V/3A 9V/2A (if any)
Output: Type-C port 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A (if any)
Input: Built-in TYPE C cable 5V/3A 9V/2A (if any)
Output: Built-in TYPE C cable 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A (if any)
Output: USB-A port 5V/3A 9V/2A 10V/2.25A 12V/1.5A
Output: Magnetic wireless 15W Max
Size: 94.6*63.5*14mm

Specifications

PD22.5W+15W

Material: ABS
Capacity: 10000mAh (145675*1)
Input: Type-C port 5V/3A 9V/2A (if any)
Output: Type-C port 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A (if any)
Input: Built-in TYPE C cable 5V/3A 9V/2A (if any)
Output: Built-in TYPE C cable 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A (if any)
Output: USB-A port 5V/3A 9V/2A 10V/2.25A 12V/1.5A
Output: Magnetic wireless 15W Max
Size: 104.5*64.5*18.5mm

MAGNETIC WIRELESS POWER BANK



ITC-MAC05D



ITC-MAC05L



ITC-MAC05DB



ITC-MAC05LB



ITC-MACC05DK



ITC-MACC05LK



ITC-MAC10D



ITC-MAC10L



ITC-MAC10DB



ITC-MAC10LB



ITC-MACC10DK



ITC-MACC10LK

Specifications

PD22.5W+15W

Material: ABS
 Capacity: 5000mAh (955465*1)
 Input: Type-C port 5V/3A 9V/2A
 Output: Type-C port 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A
 Input: Built-in TYPE C cable 5V/3A 9V/2A(if any)
 Output: Built-in TYPE C cable 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A(if any)
 Output: USB-A port 5V/3A 9V/2A 10V/2.25A 12V/1.5A
 Output: Magnetic wireless 15W Max
 Size: 94*63.5*14mm

Specifications

PD22.5W+15W

Material: ABS
 Capacity: 10000mAh (145675*1)
 Input: Type-C port 5V/3A 9V/2A
 Output: Type-C port 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A
 Input: Built-in TYPE C cable 5V/3A 9V/2A(if any)
 Output: Built-in TYPE C cable 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A(if any)
 Output: USB-A port 5V/3A 9V/2A 10V/2.25A 12V/1.5A
 Output: Magnetic wireless 15W Max
 Size: 104.5*64.5*18.5mm

Specifications

PD22.5W+15W

Material: ABS
 Capacity: 5000mAh (955465*1)
 Input: Type-C port 5V/3A 9V/2A(if any)
 Output: Type-C port 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A(if any)
 Input: Built-in TYPE C cable 5V/3A 9V/2A(if any)
 Output: Built-in TYPE C cable 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A
 Output: USB-A port 5V/3A 9V/2A 10V/2.25A 12V/1.5A
 Output: Magnetic wireless 15W Max
 Size: 96*63.5*14mm

Specifications

PD22.5W+15W

Material: ABS
 Capacity: 10000mAh (145675*1)
 Input: Type-C port 5V/3A 9V/2A(if any)
 Output: Type-C port 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A(if any)
 Input: Built-in TYPE C cable 5V/3A 9V/2A
 Output: Built-in TYPE C cable 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A
 Output: USB-A port 5V/3A 9V/2A 10V/2.25A 12V/1.5A(if any)
 Output: Magnetic wireless 15W Max
 Size: 104.5*64.5*21.35mm(for ITC-MACC10DH&ITC-MACC10LH)
 Size: 105*64.5*18.5mm

MAGNETIC WIRELESS POWER BANK WITH BUILT-IN CABLE



ITC-MACC05D



ITC-MACC05L



ITC-MCC05D



ITC-MCC05L



ITC-MACC10DH



ITC-MACC10D



ITC-MACC10L



ITC-MCC10D



ITC-MCC10L



ITC-MACC10LH

POWER BANK WITH BUILT-IN CABLE

POWER BANK WITH BUILT-IN CABLE



ITC-PB10L
10000mAh(1260110*1)

Specs: 2A/PD22.5W
Size: 148.8*68.5*18mm



ITC-PB10LC2
10000mAh(1260110*1)

Specs: PD22.5W
Size: 148.8*68.5*18mm



ITC-PB10LC4
10000mAh(1260110*1)

Specs: PD22.5W
Size: 148.8*68.5*18mm



ITC-PB10S
10000mAh(1260110*1)

Specs: 2A/PD22.5W
Size: 148.8*68.5*18mm



ITC-PB10SC2
10000mAh(1260110*1)

Specs: PD22.5W
Size: 148.8*68.5*18mm



ITC-PB10SC4
10000mAh(1260110*1)

Specs: PD22.5W
Size: 148.8*68.5*18mm



ITC-PB10T
10000mAh(1260110*1)

Specs: 2A/PD22.5W
Size: 148.8*68.5*19.1mm



ITC-PB10TC2
10000mAh(1260110*1)

Specs: PD22.5W
Size: 148.8*68.5*19.1mm



ITC-PB10TC4
10000mAh(1260110*1)

Specs: PD22.5W
Size: 148.8*68.5*19.1mm



ITC-PB10D
10000mAh(1260110*1)

Specs: 2A/PD22.5W
Size: 148.8*68.5*19.1mm



ITC-PB10DC2
10000mAh(1260110*1)

Specs: PD22.5W
Size: 148.8*68.5*19.1mm



ITC-PB10DC4
10000mAh(1260110*1)

Specs: PD22.5W
Size: 148.8*68.5*19.1mm



ITC-PB20L
20000mAh(1260110*2)

Specs: 2A/PD22.5W
Size: 148.8*68.5*30mm



ITC-PB20LC2
20000mAh(1260110*2)

Specs: PD22.5W
Size: 148.8*68.5*30mm



ITC-PB20LC4
20000mAh(1260110*2)

Specs: PD22.5W
Size: 148.8*68.5*30mm



ITC-PB20S
20000mAh(1260110*2)

Specs: 2A/PD22.5W
Size: 148.8*68.5*30mm



ITC-PB20SC2
20000mAh(1260110*2)

Specs: PD22.5W
Size: 148.8*68.5*30mm



ITC-PB20SC4
20000mAh(1260110*2)

Specs: PD22.5W
Size: 148.8*68.5*30mm



ITC-PB20T
20000mAh(1260110*2)

Specs: 2A/PD22.5W
Size: 148.8*68.5*31.1mm



ITC-PB10TC2
20000mAh(1260110*2)

Specs: PD22.5W
Size: 148.8*68.5*31.1mm



ITC-PB10TC4
20000mAh(1260110*2)

Specs: PD22.5W
Size: 148.8*68.5*31.1mm



ITC-PB20D
20000mAh(1260110*2)

Specs: 2A/PD22.5W
Size: 148.8*68.5*31.1mm



ITC-PB20DC2
20000mAh(1260110*2)

Specs: PD22.5W
Size: 148.8*68.5*31.1mm



ITC-PB20DC4
20000mAh(1260110*2)

Specs: PD22.5W
Size: 148.8*68.5*31.1mm

Specifications

2A

Material: ABS
Input: Type-C port 5V/2A
Output: Type-C port 5V/3A (Optional)
Output: USB-A port 5V/2A

Specifications

PD22.5W

Material: ABS
Input: Type-C port 5V/3A 9V/2A 12V/1.5A
Output: Type-C port 5V/3A 9V/2.22A 12V/1.67A (20W Max.)
Output: USB-A port 5V/3A 9V/2A 10V/2.25A 12V/1.5A (22.5W Max.)
Input: Built-in USB-A cable 5V/2A
Output: Built-in Micro cable 5V/2A (10W Max.)
Input: Built-in Type-C cable 5V/3A 9V/2A 12V/1.5A
Output: Built-in Type-C cable 5V/3A 9V/2.22A 12V/1.67A (20W Max.)
Output: Built-in Lightning cable 5V/3A 9V/2A 12V/1.67A (20W Max.)

Specifications

2A

Material: ABS
Input: Type-C port 5V/2A
Output: Type-C port 5V/3A (Optional)
Output: USB-A port 5V/2A

Specifications

PD22.5W

Material: ABS
Input: Type-C port 5V/3A 9V/2A 12V/1.5A
Output: Type-C port 5V/3A 9V/2.22A 12V/1.67A (20W Max.)
Output: USB-A port 5V/3A 9V/2A 10V/2.25A 12V/1.5A (22.5W Max.)
Input: Built-in USB-A cable 5V/2A
Output: Built-in Micro cable 5V/2A (10W Max.)
Input: Built-in Type-C cable 5V/3A 9V/2A 12V/1.5A
Output: Built-in Type-C cable 5V/3A 9V/2.22A 12V/1.67A (20W Max.)
Output: Built-in Lightning cable 5V/3A 9V/2A 12V/1.67A (20W Max.)

New design power bank

Easy charge cables



2 cables



4 cables



Digital display



TFT display



10000mAh



20000mAh



ITC-A03-1

10000mAh(1260105*1)

Specs: 2A/PD22.5W
Size: 148.6*69*16.2mm



ITC-A03-2

10000mAh(1260105*1)

Specs: 2A/PD22.5W
Size: 148.6*69*16.2mm



ITC-A03-3

10000mAh(1260105*1)

Specs: 2A/PD22.5W
Size: 148.6*69*16.2mm



ITC-A03-4

10000mAh(1260105*1)

Specs: 2A/PD22.5W
Size: 148.6*69*16.2mm



ITC-B03-1

10000mAh(1260105*1)

Specs: 2A/PD22.5W
Size: 148.6*69*16.2mm



ITC-B03-2

10000mAh(1260105*1)

Specs: 2A/PD22.5W
Size: 148.6*69*16.2mm



ITC-A04-1

20000mAh(1260105*2)

Specs: 2A/PD22.5W
Size: 148.6*69*28.2mm



ITC-A04-2

20000mAh(1260105*2)

Specs: 2A/PD22.5W
Size: 148.6*69*28.2mm



ITC-A04-3

20000mAh(1260105*2)

Specs: 2A/PD22.5W
Size: 148.6*69*28.2mm



ITC-A04-4

20000mAh(1260105*2)

Specs: 2A/PD22.5W
Size: 148.6*69*28.2mm



ITC-B04-1

20000mAh(1260105*2)

Specs: 2A/PD22.5W
Size: 148.6*69*28.2mm



ITC-B04-2

20000mAh(1260105*2)

Specs: 2A/PD22.5W
Size: 148.6*69*28.2mm

Specifications

2A(ACC port)

Material: ABS
Input:TYPE-C1 5V/2A
Output:TYPE-C2 5V/1.2A
Output:USB 5V/2A

Specifications

PD22.5W(ACC or ACA port)

Material: ABS
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2.22A 12V/1.67A
Output: USB 5V/3A 9V/2.22A 12V/1.67A SCCP10V/2.25A

SUPER SLIM POWER BANK

SOLID-STATE BATTERIES ARE AVAILABLE



ITC-M01S

5000mAh(706074)

Specs: 2A/PD20W/PD22.5W
Size: 103.8*68*10mm



ITC-M02

10000mAh(146074)

Specs: 2A/PD20W/PD22.5W
Size: 103.8*68*17mm



ITC-M01

5000mAh(5758102)

Specs: 2A/PD20W/PD22.5W
Size: 131.8*66.2*10.5mm



ITC-M03

10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W
Size: 131.8*66.2*13.2mm



ITC-M04

20000mAh(9858102*2)

Specs: 2A/PD20W/PD22.5W
Size: 131.8*66.2*23mm



ITC-ML01

5000mAh(5758102)

Specs: 2A/PD20W/PD22.5W
Size: 130.5*62.5*8.8mm



ITC-ML03

10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W
Size: 130.5*62.5*12.2mm



ITC-ML04

20000mAh(9858102*2)

Specs: 2A/PD20W/PD22.5W
Size: 130.5*62.5*22mm



ITC-N01S

5000mAh(706074)

Specs: 2A/PD20W/PD22.5W
Size: 103.8*68*10mm



ITC-N02

10000mAh(146074)

Specs: 2A/PD20W/PD22.5W
Size: 103.8*68*17mm



ITC-N01

5000mAh(5758102)

Specs: 2A/PD20W/PD22.5W
Size: 131.8*66.2*10.5mm



ITC-N03

10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W
Size: 131.8*66.2*13.2mm



ITC-N04

20000mAh(9858102*2)

Specs: 2A/PD20W/PD22.5W
Size: 131.8*66.2*23mm



ITC-NL01

5000mAh(5758102)

Specs: 2A/PD20W/PD22.5W
Size: 130.5*62.5*8.8mm



ITC-NL03

10000mAh(9858102)

Specs: 2A/PD20W/PD22.5W
Size: 130.5*62.5*12.2mm



ITC-NL04

20000mAh(9858102*2)

Specs: 2A/PD20W/PD22.5W
Size: 130.5*62.5*22mm

Specifications

2A

Material: ABS
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Material: ABS
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 10V/2.25A 12V/1.5A
Output: USB2 5V/3A 9V/2A 10V/2.25A 12V/1.5A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 10V/2.25A 12V/1.5A
Output: USB2 5V/3A 9V/2A 10V/2.25A 12V/1.5A

SUPER SLIM ALUMINUM ALLOY POWER BANK SOLID-STATE BATTERIES ARE AVAILABLE



ITC-MS01

5000mAh(606280)

Specs: 2A/PD20W/PD22.5W
Size: 108.5*66.5*8.8mm



ITC-MS01-M

5000mAh(536280/546280)

Specs: 2A+5W/PD22.5W+15W
Size: 108.5*66.5*8.8mm



ITC-MS03

10000mAh(126280)

Specs: 2A/PD20W/PD22.5W
Size: 108.5*66.5*14.8mm



ITC-MS04

20000mAh(126280*2)

Specs: 2A/PD20W/PD22.5W
Size: 108.5*66.5*26.8mm



ITC-MX01

5000mAh(706074)

Specs: 2A/PD20W/PD22.5W
Size: 102.5*64.5*9.8mm



ITC-MX01-M

5000mAh(606074/706074)

Specs: 2A+5W/PD22.5W+15W
Size: 102.5*64.5*9.8mm



ITC-MX03

10000mAh(1376074)

Specs: 2A/PD20W/PD22.5W
Size: 102.5*64.5*16.5mm



ITC-MX04

20000mAh(1376074*2)

Specs: 2A/PD20W/PD22.5W
Size: 102.5*64.5*30.2mm



ITC-NS01

5000mAh(606280)

Specs: 2A/PD20W/PD22.5W
Size: 108.5*66.5*8.8mm



ITC-NS03-M

10000mAh(126280)

Specs: 2A+5W/PD22.5W+15W
Size: 108.5*66.5*15.8mm



ITC-NS03

10000mAh(126280)

Specs: 2A/PD20W/PD22.5W
Size: 108.5*66.5*14.8mm



ITC-NS04

20000mAh(126280*2)

Specs: 2A/PD20W/PD22.5W
Size: 108.5*66.5*26.8mm



ITC-NX01

5000mAh(706074)

Specs: 2A/PD20W/PD22.5W
Size: 102.5*64.5*9.8mm



ITC-NX03-M

10000mAh(1376074)

Specs: 2A+5W/PD22.5W+15W
Size: 102.5*64.5*17.5mm



ITC-NX03

10000mAh(1376074)

Specs: 2A/PD20W/PD22.5W
Size: 102.5*64.5*16.5mm



ITC-NX04

20000mAh(1376074*2)

Specs: 2A/PD20W/PD22.5W
Size: 102.5*64.5*30.2mm

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 10V/2.25A 12V/1.5A
Output: USB2 5V/3A 9V/2A 10V/2.25A 12V/1.5A

Specifications

PD22.5W+15W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/3A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A
Output: USB 5V/3A 9V/2A 10V/2.25A 12V/1.5A
Output: Magnetic Wireless 15W/10W/7.5W/5W

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 10V/2.25A 12V/1.5A
Output: USB2 5V/3A 9V/2A 10V/2.25A 12V/1.5A

Specifications

PD22.5W+15W

Material: ABS(front)+Aluminum alloy(Back)
Input: TYPE-C 5V/3A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2.22A 10V/2.25A 12V/1.67A
Output: USB 5V/3A 9V/2A 10V/2.25A 12V/1.5A
Output: Magnetic Wireless 15W/10W/7.5W/5W



ITC-D01
5000mAh

Specs: 2A
Size: 100*63.8*15.8mm



ITC-D02
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 100*63.8*26.8mm



ITC-D03
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*17.5mm



ITC-D04
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*28mm



ITC-D05
30000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*40mm



ITC-S1
5000mAh

Specs: 2A
Size: 100*63.3*13.5mm



ITC-S2
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 100*63.3*23mm



ITC-S3
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 152*73.3*14.5mm



ITC-S4
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 152*73.3*23.8mm



ITC-S5
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.44*15.7mm



ITC-S6
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.44*27.7mm



ITC-P01
5000mAh

Specs: 2A
Size: 100*63.8*15.8mm



ITC-P02
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 100*63.8*26.8mm



ITC-P03
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*17.5mm



ITC-P04
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*28mm



ITC-P05
30000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.8*40mm



ITC-T1
5000mAh

Specs: 2A
Size: 100*63.3*13.5mm



ITC-T2
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 100*63.3*23mm



ITC-T3
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 152*73.3*14.5mm



ITC-T4
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 152*73.3*23.8mm



ITC-T5
10000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.44*15.7mm



ITC-T6
20000mAh

Specs: 2A/PD20W/PD22.5W
Size: 140*68.44*27.7mm

Specifications

2A

Material: ABS
Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Material: ABS
Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS
Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS
Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Specifications

2A

Material: ABS
Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

2A

Material: ABS
Input: MICRO 5V/2A
Input: TYPE-C 5V/2A
Output: TYPE-C 5V/2A
Output: USB1 5V/2A
Output: USB2 5V/2A

Specifications

PD20W

Material: ABS
Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/3A 9V/2A 12V/1.5A

Specifications

PD22.5W

Material: ABS
Input: MICRO 5V/2A 9V/2A
Input: TYPE-C 5V/2.4A 9V/2A 12V/1.5A
Output: TYPE-C 5V/3A 9V/2A 9V/2.22A 12V/1.5A
Output: USB1 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A
Output: USB2 5V/4.5A 4.5V/5A 5V/3A 9V/2A 12V/1.5A



ITC-MP01

5000mAh*4PCS(21700*1)

Specs: PD20W
Size: 79.2*38.2*25.5mm



ITC-MP02

5000mAh*4PCS(21700*1)

Specs: PD20W
Size: 88*39.2*30.7mm



ITC-P201

5000mAh(21700*1)

Specs: PD20W
Size: 79.2*38.2*25.5mm



ITC-PW01

5000mAh(21700*1)

Specs: PD20W
Size: 88*39.2*30.7mm



ITC-P202

5000mAh(21700*1)

Specs: PD20W
Size: 79.14*46.15*27mm

Specifications

PD20W

Material: ABS
Input: (Power Bank)Pogo Pin 9V/2A
USB-C1 5V/2A 9V/2A
USB-C2 5V/3A 9V/2A
Output: (Power Bank)USB-C2 or LT 5V/3A 9V/2.22A 12V/1.67A
Input: (Dock)USB-C 5V/2.5A
Output: (Dock)Pogo Pin1/2/3/4 9V/2A

Specifications

PD20W

Material: ABS
Input: (Power Bank)Pogo Pin 9V/2A
USB-C1 5V/2A 9V/2A
USB-C2 5V/3A 9V/2A
Output: (Power Bank)USB-C2 or LT 5V/3A 9V/2.22A 12V/1.67A
Input: (Dock)USB-C 5V/2.5A
Output: (Dock)Pogo Pin1/2/3/4 9V/2A

Specifications

PD20W

Material: ABS
Input: Type-C 1 5V/2A 9V/2A 18W
Input: Type-C2 5V/3A 9V/2A 18W
Output: Type-C USB-C2 or LT
5V/3A 9V/2.22A 12V/1.67A 20W

Specifications

PD20W

Material: ABS
Input: Type-C Type-C & LT 2in1 connector:
5V/2A 9V/2A 18W
Output: Type-C Type-C & LT 2in1 connector:
5V/3A 9V/2.22A 12V/1.67A 20W
Output: Built-in Type-C or Lightning Cable:
5V/3A 9V/2.22A 12V/1.67A 20W

LAPTOP POWER BANK


LiFePO₄/Solid-State batteries, 1000+ cycle life
20000-30000mAh, PD30W 45W 65W 100W & 140W



I7C-HP01/I7C-HP02

20000mAh/30000mAh(6060105*4/6060105*6)

Size: 146*132*17.8mm/146*132*23.8mm
Specs: PD65W/PD100W
Material: ABS
Input: Type-C1 5V=3A
Input: Type-C2 5V=3A 9V=3A 12V=3A 15V=3A 20V=3A(60W Max)
Output: Type-C2 5V=3A 9V=3A 12V=3A 15V=3A 20V=3.25A(65W Max)/30V=3.25A(100W)
Input: Type-C3 Built in Cable 5V=3A 9V=3A 12V=3A 15V=3A 20V=3A(60W Max)
Output: Type-C3 Built in Cable 5V=3A 9V=3A 12V=3A 15V=3A 20V=3.25A(65W Max)/30V=3.25A(100W)
Output: USB 9V=3A 9V=2A 10V=2.25A 12V=1.5A(22.5W Max)



60W IN

100W OUT

22.5W OUT



I7C-T2426

20000mAh(126280*2)

Specs: PD35W
Size: 116.7*70.5*27.7mm



I7C-C01

9600mAh/10000mAh(18650*3)

Specs: PD45W
Size: 100*62.5*22.5mm



I7C-T6&I7C-P4

20000mAh(6060100*4)

Specs: PD65W
Size: 140*68*27.7mm

Specifications

PD35W

Material: ABS
Input: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A
Output: Type-C 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A
Output: USB 5V/3A 9V/2A 12V/1.5A 10V/2.25A
Input: Built-in Type-C cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A
Output: Built-in Type-C cable 5V/3A 9V/3A 12V/2.9A 15V/2.3A 20V/1.75A

Specifications

PD45W

Material: ABS
Input: TYPE-C 5V/3.0A 9V/2.0A 12V/1.67A 15V/2A 20V/1.5A(30W max)
Output: TYPE-C 5V/3.0A 9V/3A 12V/3A 15V/3A 20V/2.25A(45W max)
PPS: 3.3V-11V/3A, 3.3V-16V/3A
Output: USB 5V/3A 9V/2A 12V/1.67A(20W max)
IC solution: with OCP,OVP,OPP,SCP,OTP

Specifications

PD65W

Material: ABS
Input: Micro 5V/2A 9V/2A 12V/1.5A(18W)
Input: Type-C 5V/3A 9V/3A 12/3A 15V/3A 20V/3A(60W)
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W max)
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W)
IC solution: with OCP,OVP,OPP,SCP,OTP



ITC-P5

25000mAh(6060100*5)

Specs: PD100W
Size: 140*68*39.7mm

ITC-P5

30000mAh(6060100*6)

Specs: PD140W
Size: 140*68*39.7mm

ITC-S6&ITC-D4

20000mAh(6060100*4)

Specs: PD45W
Size: 140*68*27.7mm

ITC-S6&ITC-D4

20000mAh(6060100*4)

Specs: PD65W
Size: 140*68*27.7mm

ITC-D5

25000mAh(6060100*5)

Specs: PD100W
Size: 140*68*39.7mm

ITC-D5

30000mAh(6060100*6)

Specs: PD140W
Size: 140*68*39.7mm

Specifications

PD100W

Material: ABS
USB-C1 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 100W Max
USB-C2 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 100W Max
USB-A1 Output: 5V/3A 9V/2A 10V/2.25A 12V/1.5A 22.5W Max
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD140W

Material: ABS
USB-C1 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 28V/5A 140W Max
USB-C2 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 28V/5A 140W Max
USB-A1 Output: 5V/3A 9V/2A 10V/2.25A 12V/1.5A 22.5W Max
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD45W

Material: ABS+rubber oil
Input: Micro 5V/2A 9V/2A (18W max)
Input: Type-C 5V/3.0A 9V/2.0A 12V/1.5 15V/2.66A 20V/2A(40W max)
Output: Type-C 5V/3.0A 9V/3A 12V/3A 15V/3A 20V/2.25A(45W max)
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W max)
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD65W

Material: ABS+rubber oil
Input: Micro 5V/2A 9V/2A 12V/1.5A(18W)
Input: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A(60W)
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A(65W max)
Output: USB 1/2 4.5V/5A 5V/5A 5V/2.4A 9V/2A 12V/1.5A(25W)
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD100W

Material: ABS
USB-C1 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 100W Max
USB-C2 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 100W Max
USB-A1 Output: 5V/3A 9V/2A 10V/2.25A 12V/1.5A 22.5W Max
IC solution: with OCP,OVP,ODP,SCP,OTP

Specifications

PD140W

Material: ABS
USB-C1 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 28V/5A 140W Max
USB-C2 Input/Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 28V/5A 140W Max
USB-A1 Output: 5V/3A 9V/2A 10V/2.25A 12V/1.5A 22.5W Max
IC solution: with OCP,OVP,ODP,SCP,OTP



ITC-PD02

10000mAh(18650*4)

Specs: PD100W
Size: 147*45*34mm

ITC-PD01

10000mAh(18650*4)

Specs: PD100W
Size: 147*45*34mm

ITC-PD03

20000mAh(21700*4)

Specs: PD100W
Size: 147*52*48mm

ITC-PD04

20000mAh(21700*4)

Specs: PD100W
Size: 147*52*48mm

Specifications

PD100W

Material: ABS+PC
Input: TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A (100W Max)
Output: TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A 3.3-21V/5A PPS (100W Max)
Input: Built-in TYPE-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A (100W Max)
Output: Built-in TYPE-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A 3.3-21V/5A PPS (100W Max)
Output: USB 5.0V/3.0A 9V/2.22A 10V/2.25A 12V/1.67A (22.5W Max)

Specifications

PD100W

Material: ABS+PC
Input: TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A (100W Max)
Output: TYPE-C port 5V/3A 9V/3A 12V/3A 15V/3A 20V/5.0A 3.3-21V/5A PPS (100W Max)
Output: USB 5.0V/3.0A 9V/2.22A 10V/2.25A 12V/1.67A (22.5W Max)

Specifications

PD100W

Material: ABS+PC
Input: Type-C 1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A(60W Max)
Input: Type-C 2 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A(60W Max)
Output: Type-C 1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A 20V/5.0A(100W Max)
Output: Type-C 2 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A 20V/5.0A(100W Max)
Output: USB 5.0V/2.1A 9V/2.0A 10V/2.25A 12V/1.5A(22.5W Max)

Specifications

PD100W

Material: ABS+PC
Input: Type-C 1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A(60W Max)
Output: Type-C 1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A 20V/5.0A(100W Max)
Output: USB 5.0V/2.1A 9V/2.0A 10V/2.25A 12V/1.5A(22.5W Max)
Input: Built-in Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A 20V/5.0A(100W Max)
Output: Built-in Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A 20V/5.0A(100W Max)



ITC-PD03L

20000mAh(21700*4)

Specs: PD100W
Size: 147*52*48mm

ITC-PD04L

20000mAh(21700*4)

Specs: PD100W
Size: 147*52*48mm

Specifications

PD100W

Material: ABS+PC
 Input: Type-C 1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A(60W Max)
 Input: Type-C 2 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A(60W Max)
 Output: Type-C 1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A 20V/5.0A(100W Max)
 Output: Type-C 2 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A 20V/5.0A(100W Max)
 Output: USB 5.0V/2.1A 9V/2.0A 10V/2.25A 12V/1.5A(22.5W Max)

Specifications

PD100W

Material: ABS+PC
 Input: Type-C 1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A(60W Max)
 Output: Type-C 1 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A 20V/5.0A(100W Max)
 Output: USB 5.0V/2.1A 9V/2.0A 10V/2.25A 12V/1.5A(22.5W Max)
 Input: Built-in Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A 20V/5.0A(100W Max)
 Output: Built-in Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A 20V/5.0A(100W Max)



TG01

TWS earbuds

Battery: 25mAh/300mAh
Size: 56*50*21mm

TG04

TWS earbuds

Battery: 25mAh/220mAh
Size: 45.08*57.01*22.8mm

TG05-ENC

TWS earbuds

Battery: 45mAh/500mAh
Size: 61.6*44.5*25.6mm

TG06

TWS earbuds

Battery: 30mAh/180mAh
Size: 49.6*52.6*26.5mm

TG08

TWS earbuds

Battery: 30mAh/200mAh
Size: 55.5*52.7*27.5mm

TG08-Pro

TWS earbuds

Battery: 30mAh/200mAh
Size: 55.5*52.7*27.5mm

TG09

TWS earbuds

Battery: 30mAh/300mAh
Size: 55.9*50.4*23.4mm

TG10

TWS earbuds

Battery: 30mAh/1200mAh
Size: 55.9*50.4*23.4mm

TG11-ANC

TWS earbuds

Battery: 30mAh/180mAh
Size: 60*44.5*24.7mm

TG11 Pro

TWS earbuds

Battery: 30mAh/180mAh
Size: 60*44.5*24.7mm

TG12 Pro


TWS earbuds

Battery: 30mAh/180mAh
Size: 49.92*44.5*19.29mm

TG13

TWS earbuds

Battery: 30mAh/230mAh
Size: 49.92*44.5*22.86mm

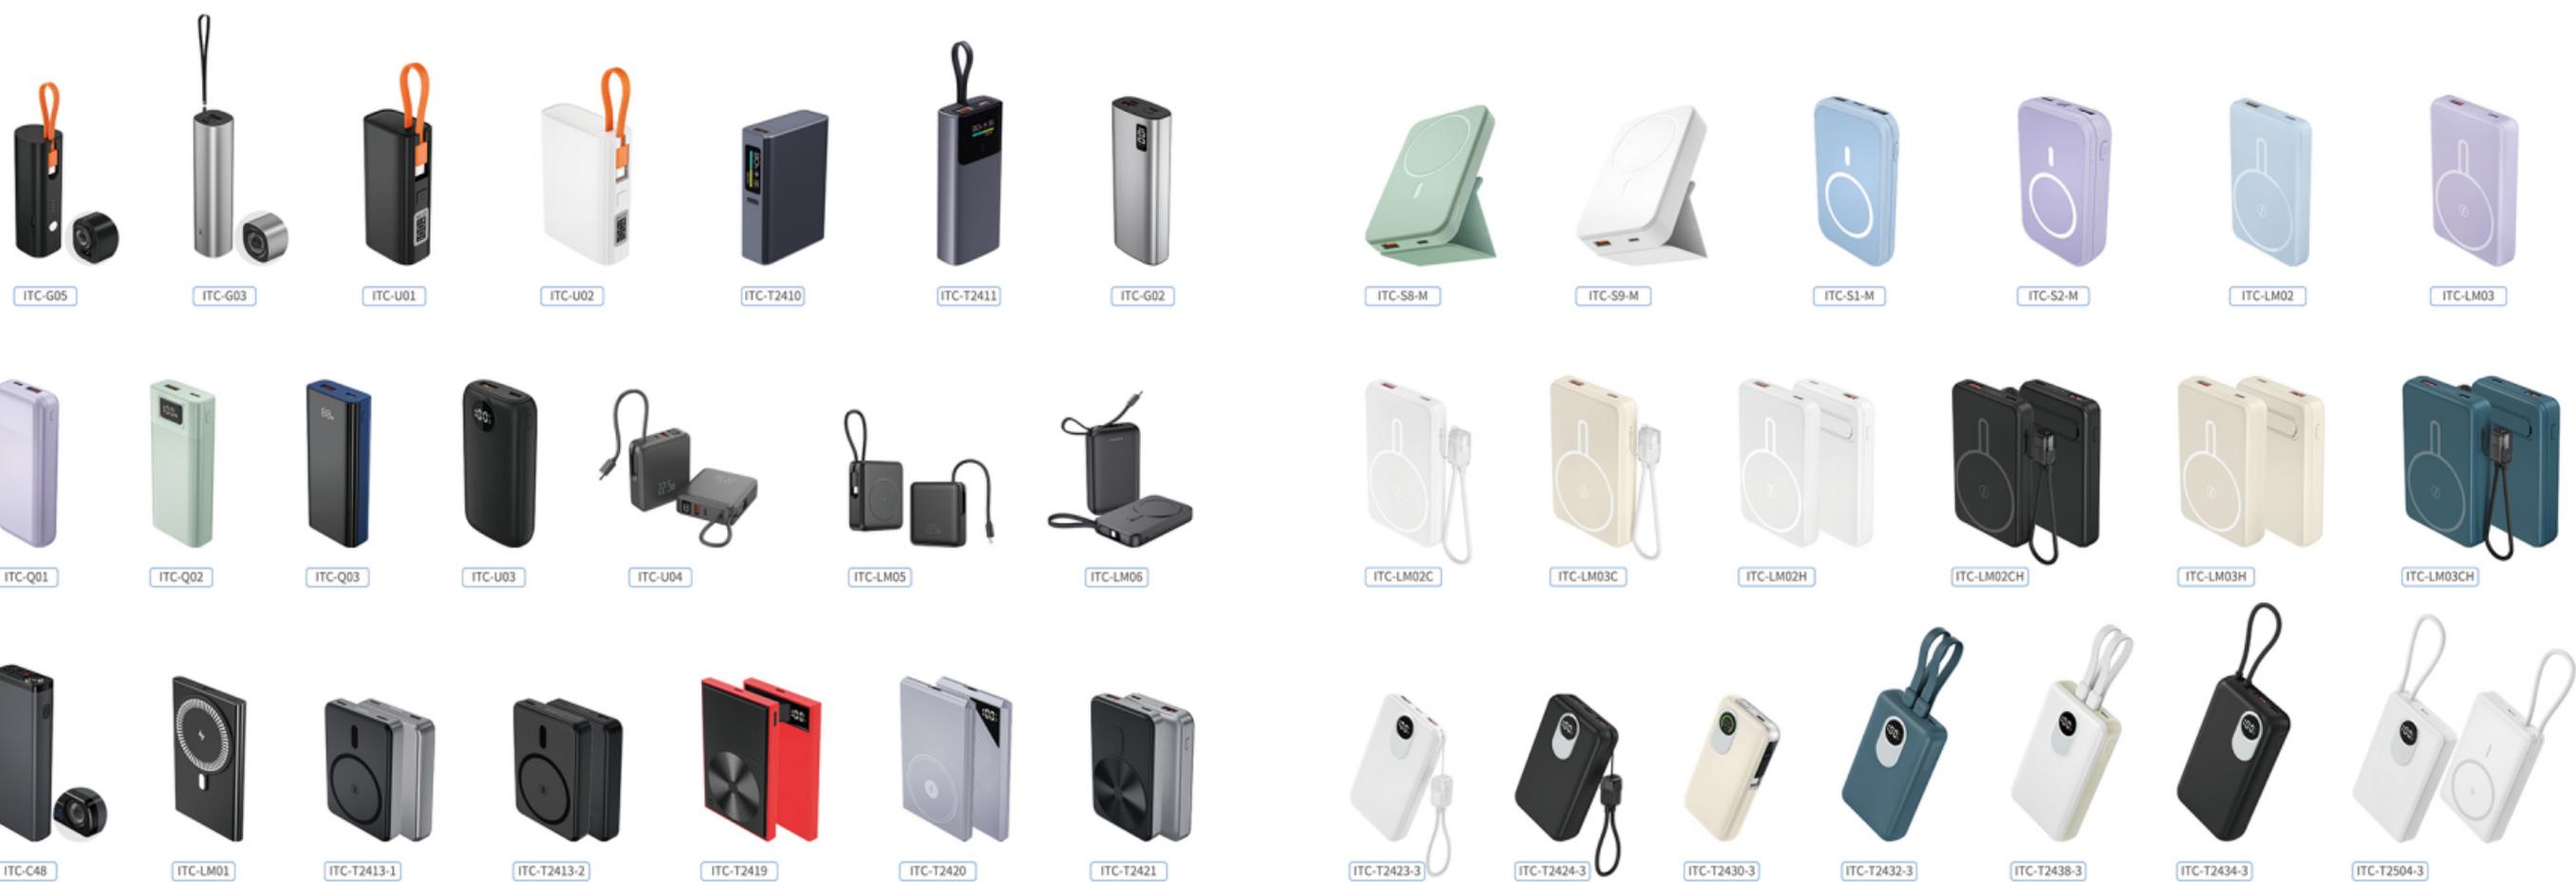



ITC-AP01

ITC-AP02

ITC-T2427-2

ITC-T2431-2

ITC-T2435

ITC-T2502-1



ITC-T2300P

ITC-T2310P

ITC-T2311P

ITC-T2401

ITC-T2340

ITC-T2347

ITC-T2348



ITC-P03S

ITC-P04S

ITC-P05S

ITC-P03SC

ITC-P04SC

ITC-P05SC

